




Orion Series



G-22302

G-22312 EM



Product Information

Description	2FT/LNR/5WS/5CCT	Description EM	2FT/LNR/5WS/5CCT/EM
Color temp	30, 35, 41, 50, 65K	IC rated	Yes
Output lumens	2900/2465/2030/1595/1160	Dimmable	0-10V Dimmable
Beam angle	120°	Height	3.15"
Input volts	120-277V	Width	2.48"
Wattage	20/17/14/11/8W	Length	24.02"
CRI	80+	DLC	Regular
mA	200mA	Packed	4

G-22304

G-22314 EM



Product Information

Description	4FT/LNR/5WS/5CCT	Description EM	4FT/LNR/5WS/5CCT/EM
Color temp	30, 35, 41, 50, 65K	IC rated	Yes
Output lumens	5800/5075/4350/3625/2900	Dimmable	0-10V Dimmable
Beam angle	120°	Height	3.15"
Input volts	120-277V	Width	2.48"
Wattage	40/35/30/25/20W	Length	47.24"
CRI	80+	DLC	Low Bay
mA	380mA	Packed	4

G-22324



Product Information

Description	4FT/LNR/5WS/5CCT/MS	IC rated	Yes
Color temp	30, 35, 41, 50, 65K	Dimmable	0-10V Dimmable
Output lumens	5800/5075/4350/3625/2900	Height	3.15"
Beam angle	120°	Width	2.48"
Input volts	120-277V	Length	47.24"
Wattage	40/35/30/25/20W	DLC	Low Bay
CRI	80+	Packed	4
mA	380mA		

G-22354

Product Information

Description	4FT/LNR/5WS/5CCT/HO		
Color temp	30, 35, 41, 50, 65K	IC rated	Yes
Output lumens	10,800/9000/7200/5400/3600	Dimmable	0-10V Dimmable
Beam angle	120°	Height	3.15"
Input volts	120-277V	Width	2.48"
Wattage	72/60/48/36/24	Length	47.24"
CRI	80>	DLC	High Bay
mA	680mA	Packed	4

G-22374

Product Information

Description	4FT/LNR/5WS/5CCT/HO/MS		
Color temp	30, 35, 41, 50, 65K	IC rated	Yes
Output lumens	10,800/9000/7200/5400/3600	Dimmable	0-10V Dimmable
Beam angle	120°	Height	3.15"
Input volts	120-277V	Width	2.48"
Wattage	72/60/48/36/24	Length	47.24"
CRI	80>	DLC	High Bay
mA	680mA	Packed	4

G-22308**G-22318 EM**

Product Information

Description	8FT/LNR/5WS/5CCT	Description EM	8FT/LNR/5WS/5CCT/EM
Color temp	30, 35, 41, 50, 65K	IC rated	Yes
Output lumens	11600/10150/8700/7250/5800	Dimmable	0-10V Dimmable
Beam angle	120°	Height	3.15"
Input volts	120-277V	Width	2.48"
Wattage	80/70/60/50/40W	Length	94.49"
CRI	80>	DLC	High Bay
mA	750mA	Packed	4

Accessories



Default Included Accessories

4" JBox Cover - Surface mount
 48" Air craft cable kit (2 set)
 Suspension mount



Bilevel Motion Sensor

G-22290
 8FT Linear use G-22292




Bridge Connector

G-22291

Dimensions

Pre-Wired End-to-End for Continuous Row Mounting

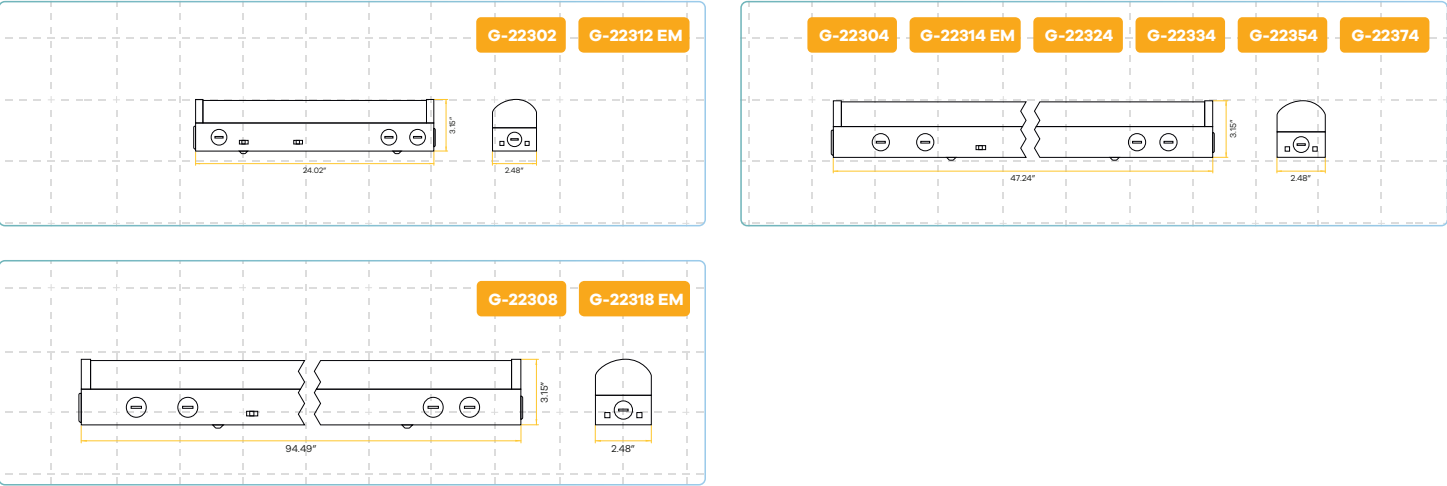

Default Setting of the Motion Sensor

G-22324

G-22374

- | | |
|-------------------------------|------------------------------------|
| → Sensitivity 100% | → Stand-By Light Level Setting 30% |
| → Hold Time Setting 5Min | → Light-control Setting 60min |
| → Light-control Setting 30Lux | |