

PURA 3.5"

ROUND LED GIMBAL DOWNLITE



G-98720




G-98725



ITEM	G-98720			ITEM	G-98725		
DESCRIPTION	PR3.5/20W/WS2/RD/5CCT	OUTPUT VOLTS	33-38V	DESCRIPTION	PR3.5/20W/WS2/RD/BL/5CCT	OUTPUT VOLTS	33-38V
COLOR TEMP	27, 30, 35, 41, 50k	IC RATED	Only at 14W	COLOR TEMP	27, 30, 35, 41, 50k	IC RATED	Only at 14W
TRIM FINISH	WHITE	PLENUM RATED	FT6	TRIM FINISH	BLACK	PLENUM RATED	FT6
OUTPUT LUMEN	1850/1400	DIMMABLE	Triac or 0-10V	OUTPUT LUMEN	1850/1400	DIMMABLE	Triac or 0-10V
BEAM ANGLE	40° (Default)	CUTOUT	3.50"	BEAM ANGLE	40° (Default)	CUTOUT	3.50"
INPUT VOLTS	120-277	OD	4.40"	INPUT VOLTS	120-277	OD	4.40"
WATTAGE	20/14W	HEIGHT	3.78"	WATTAGE	20/14W	HEIGHT	3.78"
CRI	90>	WIRE SPACE	12 Cubic inch	CRI	90>	WIRE SPACE	12 Cubic inch
mA	480/320mA			mA	480/320mA		

Lens options



ITEM	G-98828	G-98829
DESCRIPTION	PR/L/30°CLR	PR/L/40°CLR



ITEM	G-98825	G-98826	G-98827
DESCRIPTION	PR/L/24-DEGREE	PR/L/40-DEGREE	PR/L/60-DEGREE

P. 1



Wattage Selectable
14W 20W

Interchangeable
lens

Dimmable:
Down to 5%

Lifetime:
50,000 hours

Warranty:
3 years

Accessories

Emergency LED Driver



15W G-48410

60W G-95521

30W G-48411

25W G-95525

New Construction Plate



G-19981 2 Punch Out

Extension Cords



G-20247 5ft - G-20248 10ft


Multi Driver Converter



G-95825 14W

G-95826 20W

Diagram

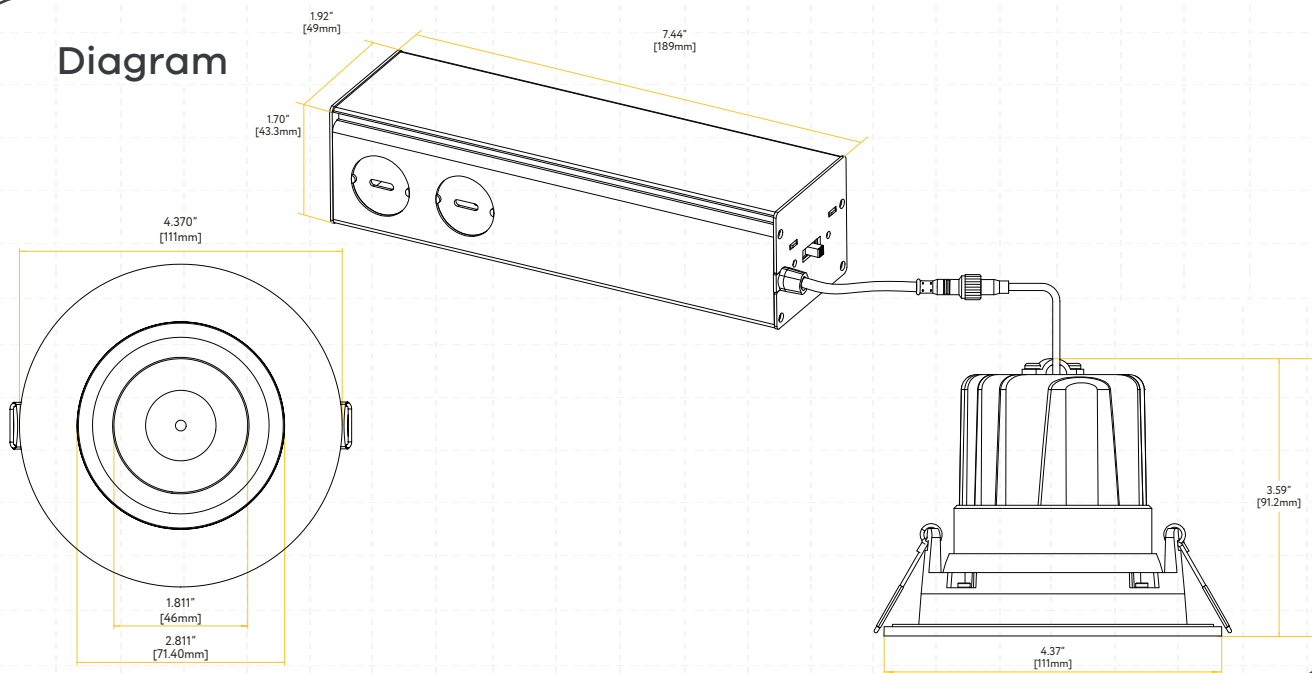

Dimmer List

BRAND	SERIES	MODEL	LOAD	BRAND	SERIES	MODEL	LOAD
LUTRON	SKYLARK CONTOUR	LECL-153P	150W	LUTRON	TOGGLER	TGCL-153P	150W
		CTCL-150H	150W		ARIADNI	AYCL-153P	150W
		LGCL-153PLH	150W		MAESTRO	MACL-153M	600W
		CTCL-153P	150W	LEVITON	ILLUMATECH	IPL06	150W
		SCL-153P	150W		SURESLIDE	6672	150W
		S-600P	600W		SURESLIDE	6674	150W
	CASETA	PD-6WCL	150W	EATON	SMART DIMMER	AAL06	300W
		PD-5NE	150W	PASS & SEYMOUR	HARMONY	DCL453PTCCCV6	150W
		PD-10NXD	250W	GE	ROCKER	10464	150W
	DIVA	DVCL-153P	150W		TOGGLE	18027	150W