



White Flanged Trim (2700K, 98CRI, 35°-Clear, 12W)

Polar Plot

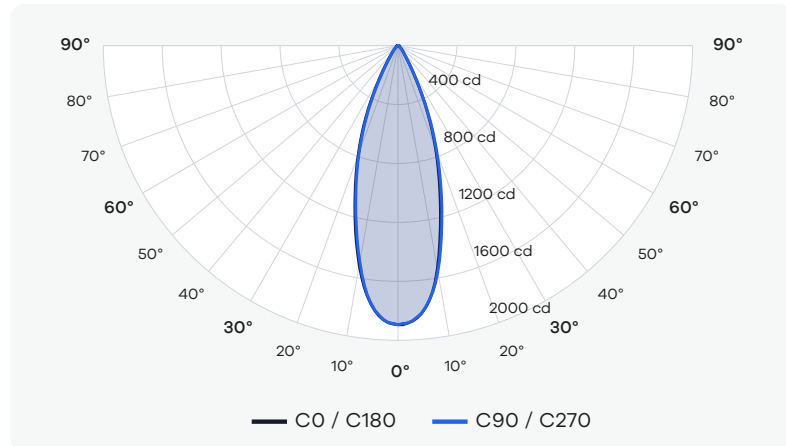

Cone of Light Tabulation

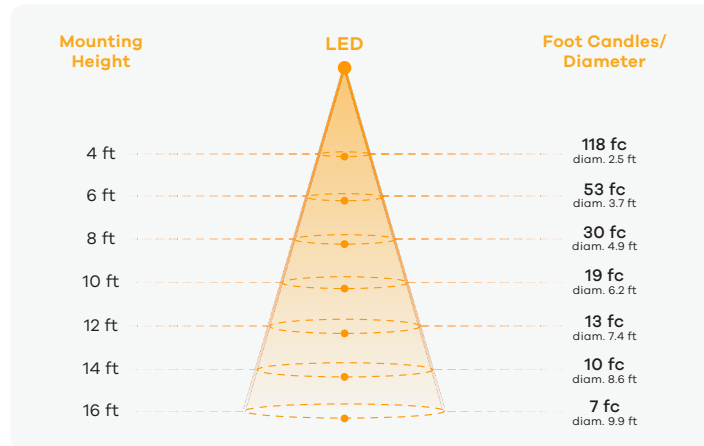

Power Information


Voltage	119.84 V
Current	0.08936 A
Power	10.5 W
Power Factor	0.9776

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	802 LM		0 - 40	729	92%
Luminaire Efficacy	67 LM/W		0 - 60	769	97%
Maximun Candela	1894 CD		0 - 80	789	100%

White Flanged Trim (3000K, 98CRI, 35°-Clear, 12W)

Polar Plot

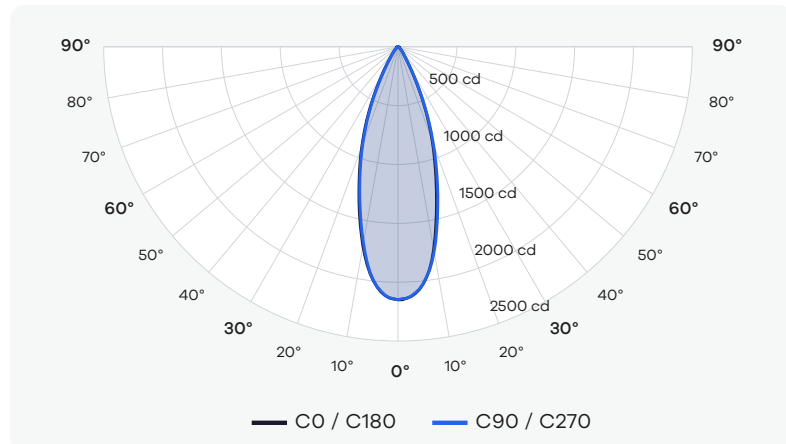

Cone of Light Tabulation

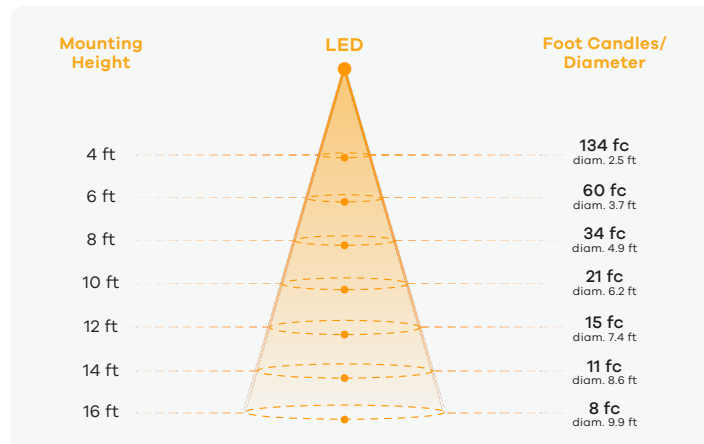

Power Information


Voltage	119.82 V
Current	0.08972 A
Power	10.5 W
Power Factor	0.9779

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	910 LM		0 - 40	827	92%
Luminaire Efficacy	89 LM/W		0 - 60	872	97%
Maximun Candela	2149 CD		0 - 80	895	100%

White Flanged Trim (3500K, 98CRI, 35°-Clear, 12W)

Polar Plot

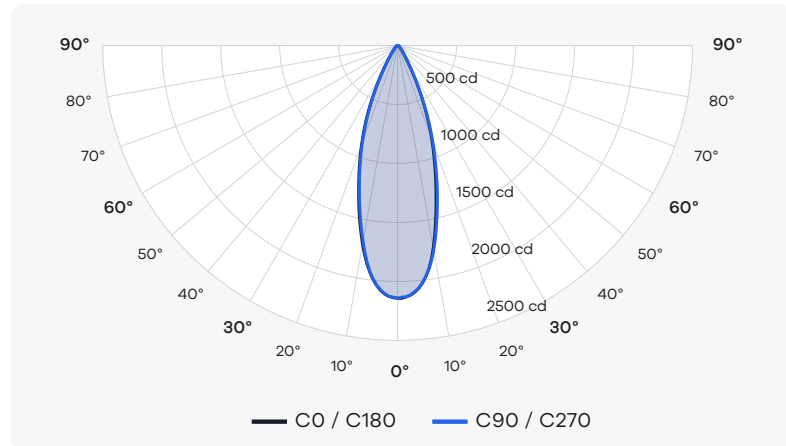

Cone of Light Tabulation

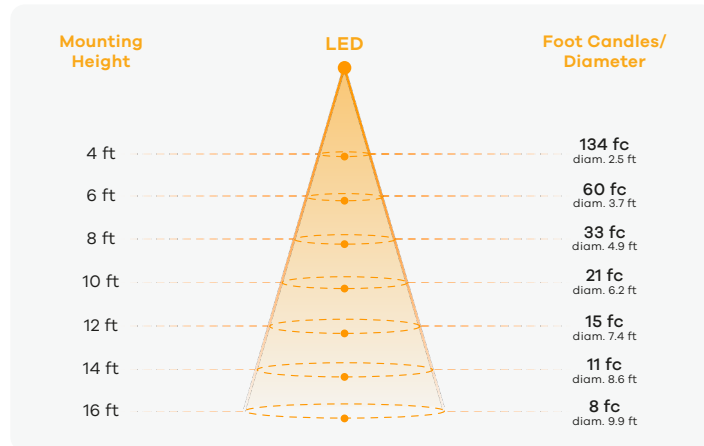

Power Information


Voltage	119.83 V
Current	0.08936 A
Power	10.5 W
Power Factor	0.9778

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	907 LM		0 - 40	824	92%
Luminaire Efficacy	76 LM/W		0 - 60	870	97%
Maximun Candela	2143 CD		0 - 80	892	100%

White Flanged Trim (2700K, 98CRI, 42°-Clear, 12W)

Polar Plot

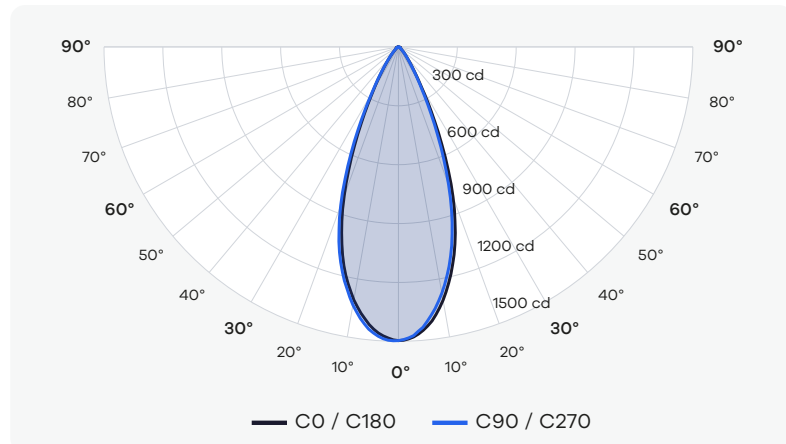

Cone of Light Tabulation

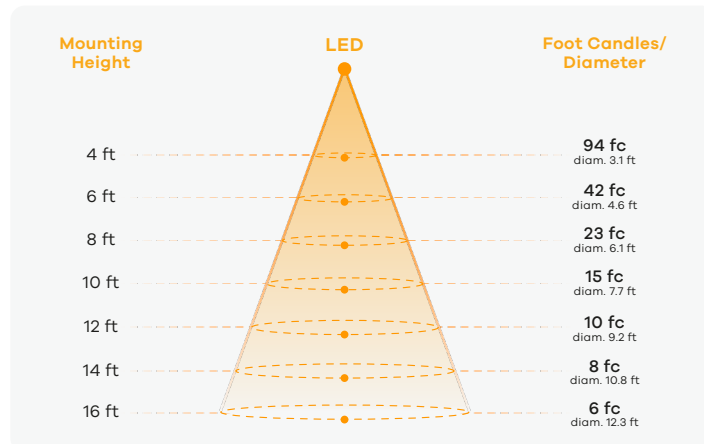

Power Information


Voltage	119.72 V
Current	0.08974 A
Power	10.5 W
Power Factor	0.9776

Summary of Results


Spacing Criteria	0 - 180: 0.38	90 - 270: 0.38	Zone	Lumens	% of Luminaire
Total Lumen Output	797 LM		0 - 40	731	92%
Luminaire Efficacy	66 LM/W		0 - 60	772	97%
Maximun Candela	1496 CD		0 - 80	793	100%

White Flanged Trim (3000K, 98CRI, 42°-Clear, 12W)

Polar Plot

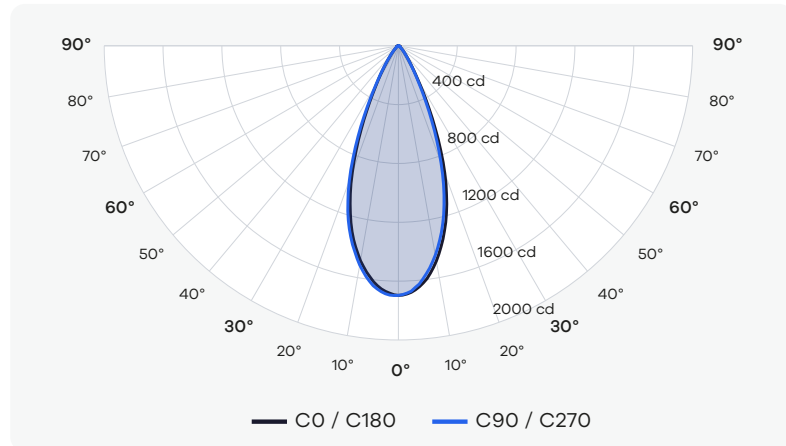

Cone of Light Tabulation

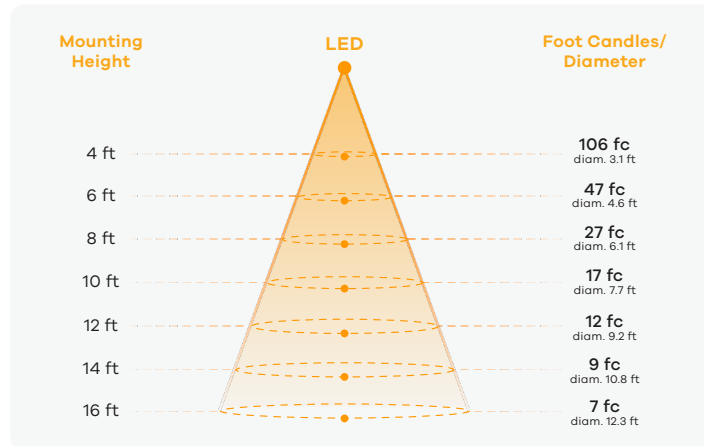

Power Information


Voltage	119.82 V
Current	0.08961 A
Power	10.5 W
Power Factor	0.9779

Summary of Results


Spacing Criteria	0 - 180: 0.38	90 - 270: 0.38	Zone	Lumens	% of Luminaire
Total Lumen Output	904 LM		0 - 40	829	92%
Luminaire Efficacy	88 LM/W		0 - 60	875	97%
Maximun Candela	1697 CD		0 - 80	900	100%

White Flanged Trim (3500K, 98CRI, 42°-Clear, 12W)

Polar Plot

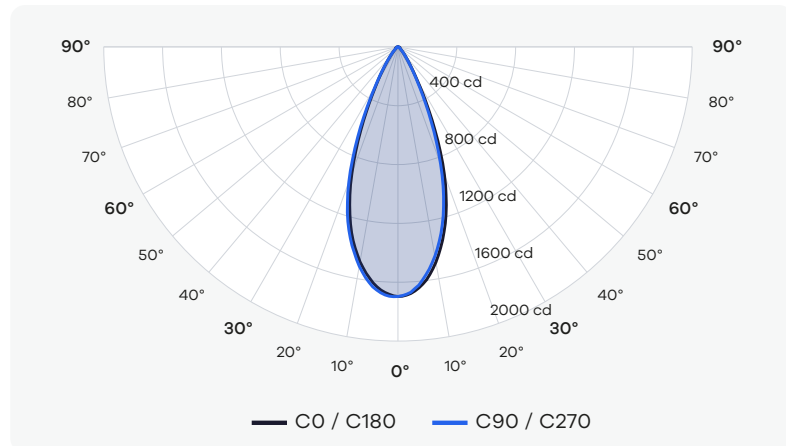

Cone of Light Tabulation

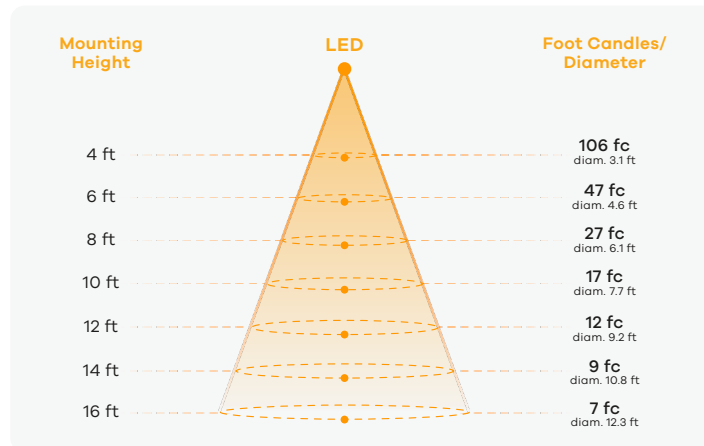

Power Information


Voltage	119.83 V
Current	0.08927 A
Power	10.5 W
Power Factor	0.9778

Summary of Results


Spacing Criteria	0 - 180: 0.38	90 - 270: 0.38	Zone	Lumens	% of Luminaire
Total Lumen Output	904 LM		0 - 40	830	92%
Luminaire Efficacy	75 LM/W		0 - 60	876	97%
Maximun Candela	1697 CD		0 - 80	900	100%

White Flanged Trim (2700K, 98CRI, 52°-Clear, 12W)

Polar Plot

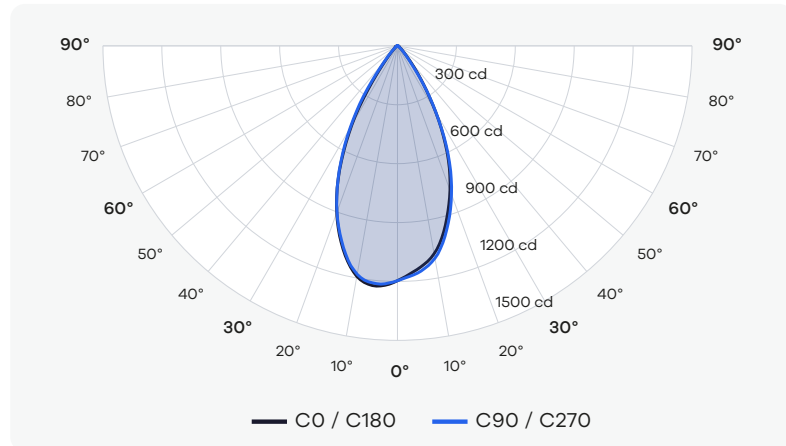

Cone of Light Tabulation

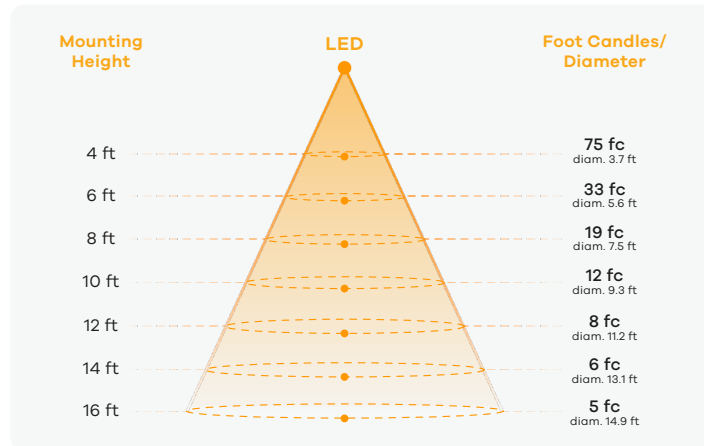

Power Information


Voltage	119.74 V
Current	0.08963 A
Power	10.5 W
Power Factor	0.9776

Summary of Results


Spacing Criteria	0 - 180: 0.47	90 - 270: 0.47	Zone	Lumens	% of Luminaire
Total Lumen Output	895 LM		0 - 40	772	92%
Luminaire Efficacy	75 LM/W		0 - 60	821	98%
Maximun Candela	1196 CD		0 - 80	837	100%

White Flanged Trim (3000K, 98CRI, 52°-Clear, 12W)

Polar Plot

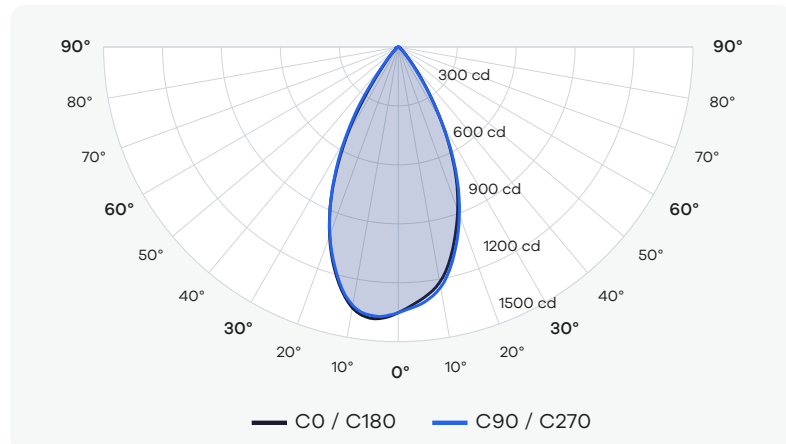

Cone of Light Tabulation

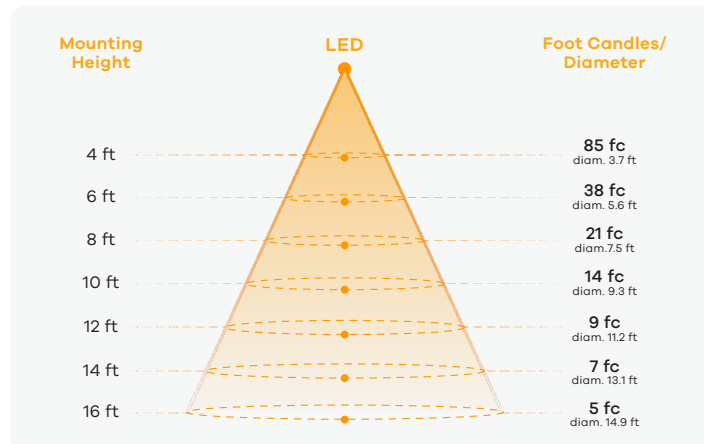

Power Information


Voltage	119.83 V
Current	0.08950 A
Power	10.5 W
Power Factor	0.9779

Summary of Results


Spacing Criteria	0 - 180: 0.47	90 - 270: 0.47	Zone	Lumens	% of Luminaire
Total Lumen Output	1012 LM		0 - 40	873	92%
Luminaire Efficacy	99 LM/W		0 - 60	929	98%
Maximun Candela	1352 CD		0 - 80	947	100%

White Flanged Trim (3500K, 98CRI, 52°-Clear, 12W)

Polar Plot

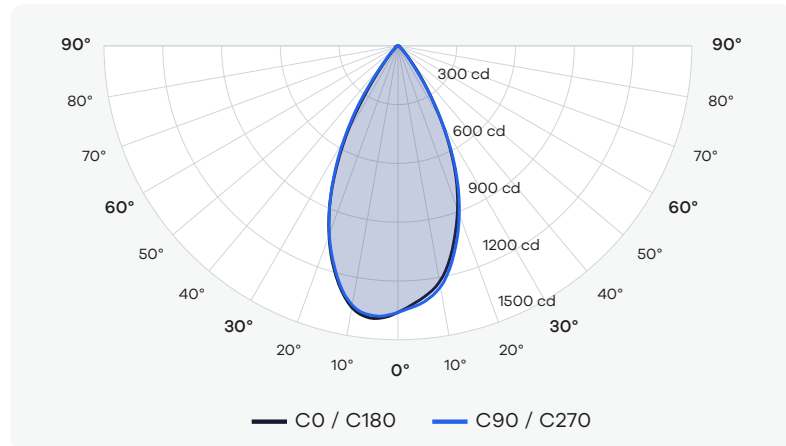

Cone of Light Tabulation

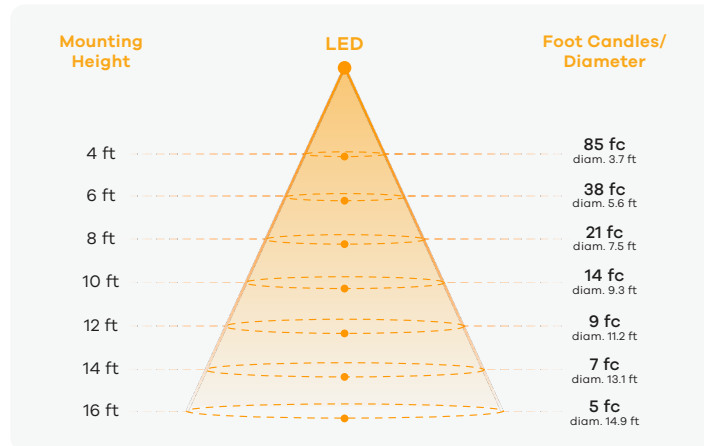

Power Information


Voltage	119.83 V
Current	0.08934 A
Power	10.5 W
Power Factor	0.9778

Summary of Results


Spacing Criteria	0 - 180: 0.47	90 - 270: 0.47	Zone	Lumens	% of Luminaire
Total Lumen Output	1018 LM		0 - 40	878	92%
Luminaire Efficacy	85 LM/W		0 - 60	934	98%
Maximum Candela	1360 CD		0 - 80	952	100%

White Flanged Trim (2700K, 98CRI, 34°-Silver Reflector, 12W)

Polar Plot

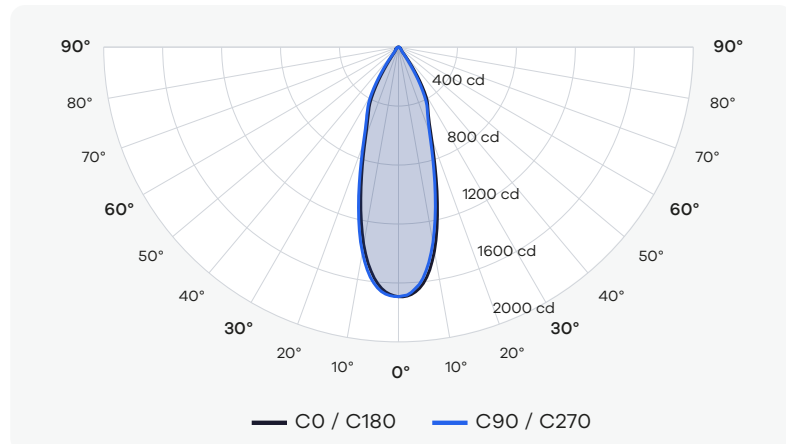

Cone of Light Tabulation

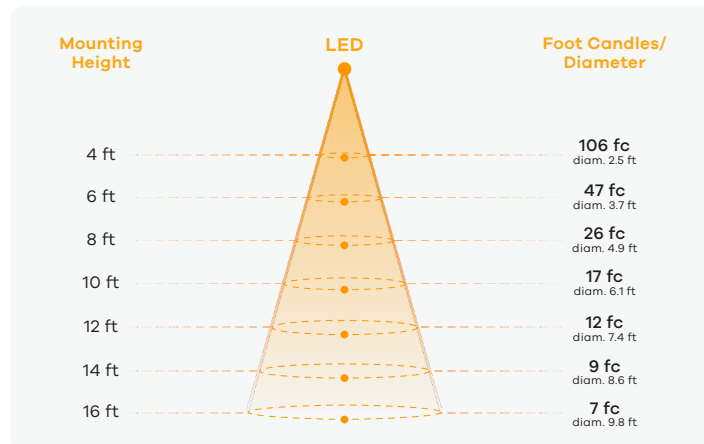

Power Information


Voltage	119.74 V
Current	0.08953 A
Power	10.5 W
Power Factor	0.9776

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	792 LM		0 - 40	749	93%
Luminaire Efficacy	66 LM/W		0 - 60	785	97%
Maximum Candela	1693 CD		0 - 80	802	99%

White Flanged Trim (3000K, 98CRI, 34°-Silver Reflector, 12W)

Polar Plot

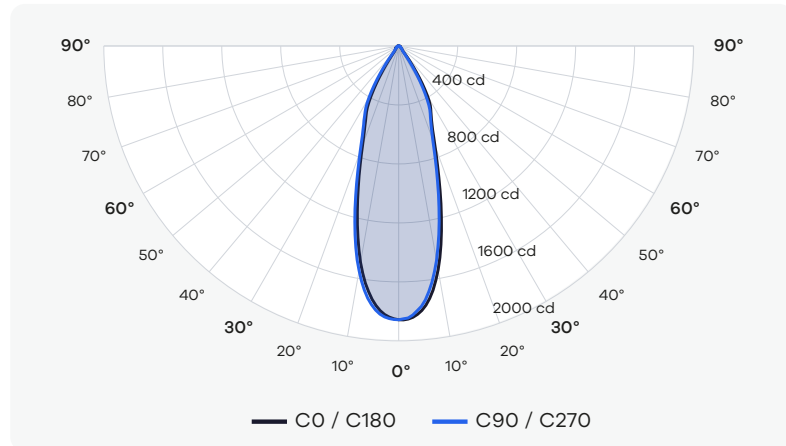

Cone of Light Tabulation

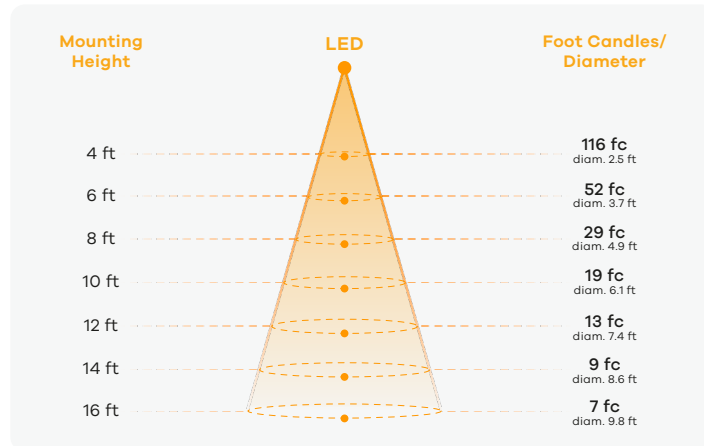

Power Information


Voltage	119.83 V
Current	0.08949 A
Power	10.5 W
Power Factor	0.9779

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	869 LM		0 - 40	821	93%
Luminaire Efficacy	85 LM/W		0 - 60	861	97%
Maximun Candela	1857 CD		0 - 80	880	99%

White Flanged Trim (3500K, 98CRI, 34°-Silver Reflector, 12W)

Polar Plot

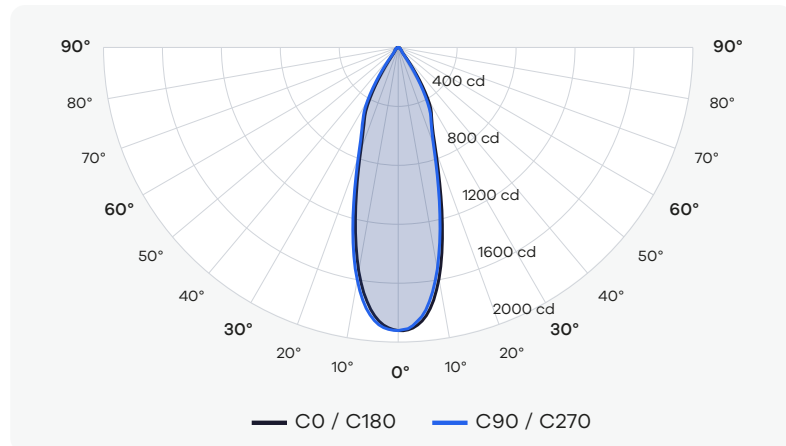

Cone of Light Tabulation

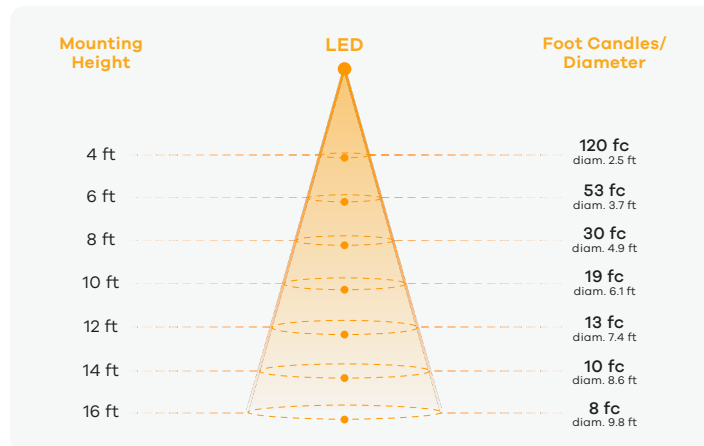

Power Information


Voltage	119.82 V
Current	0.08925 A
Power	10.5 W
Power Factor	0.9778

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	899 LM		0 - 40	850	93%
Luminaire Efficacy	75 LM/W		0 - 60	891	97%
Maximun Candela	1921 CD		0 - 80	910	99%

White Flanged Trim (2700K, 98CRI, 53°-Silver Reflector, 12W)

Polar Plot

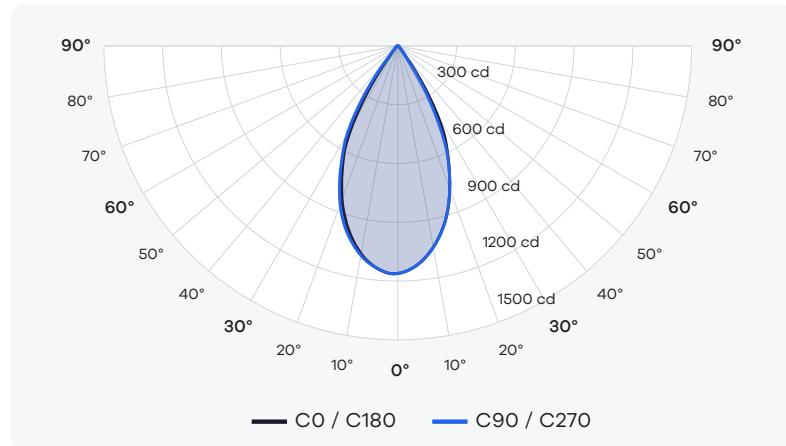

Cone of Light Tabulation

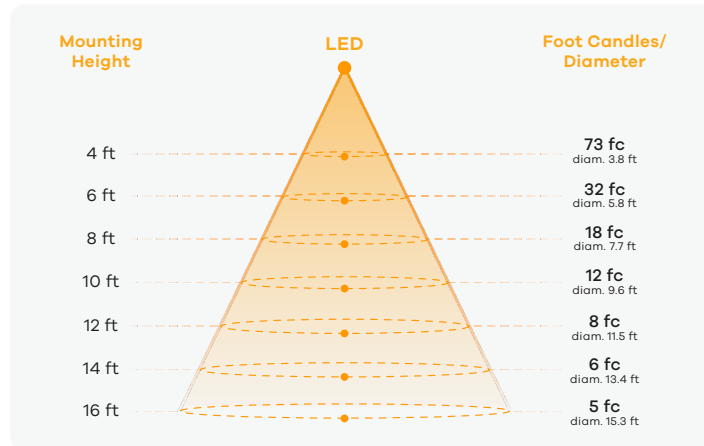

Power Information


Voltage	119.74 V
Current	0.08949 A
Power	10.5 W
Power Factor	0.9776

Summary of Results


Spacing Criteria	0 - 180: 0.48	90 - 270: 0.48	Zone	Lumens	% of Luminaire
Total Lumen Output	835 LM		0 - 40	741	94%
Luminaire Efficacy	82 LM/W		0 - 60	770	98%
Maximun Candela	1161 CD		0 - 80	783	100%

White Flanged Trim (3000K, 98CRI, 53°-Silver Reflector, 12W)

Polar Plot

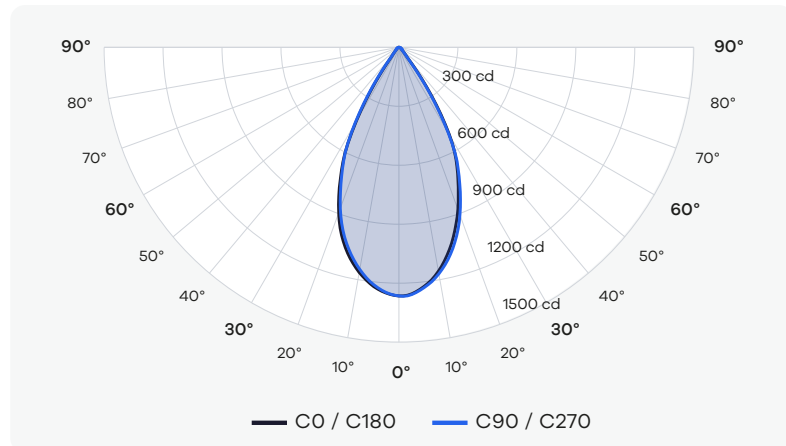

Cone of Light Tabulation

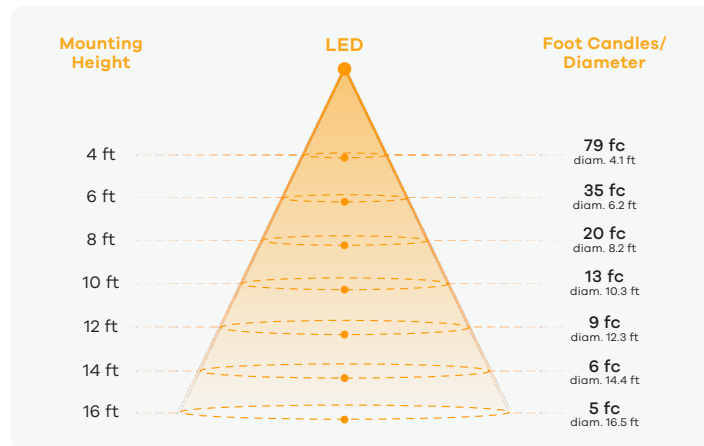

Power Information


Voltage	119.74 V
Current	0.08949 A
Power	10.5 W
Power Factor	0.9776

Summary of Results


Spacing Criteria	0 - 180: 0.51	90 - 270: 0.51	Zone	Lumens	% of Luminaire
Total Lumen Output	915 LM		0 - 40	879	93%
Luminaire Efficacy	90 LM/W		0 - 60	920	98%
Maximun Candela	1265 CD		0 - 80	937	100%

White Flanged Trim (3500K, 98CRI, 53°-Silver Reflector, 12W)

Polar Plot

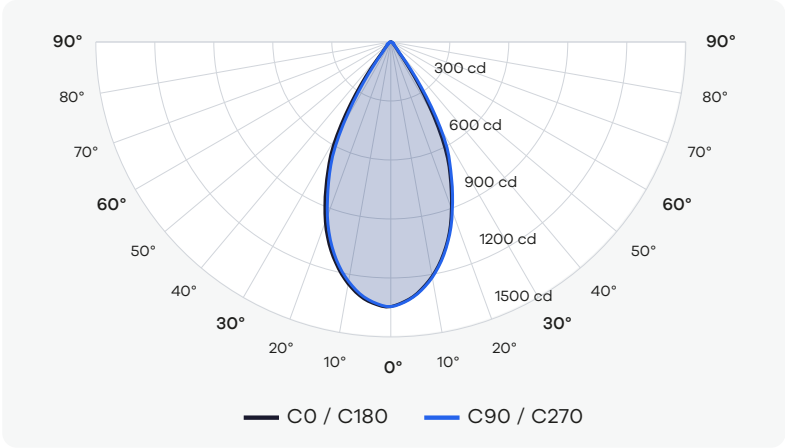

Cone of Light Tabulation

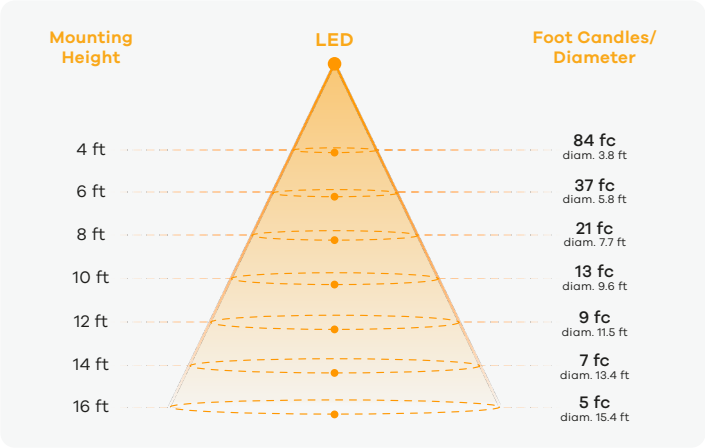

Power Information

Voltage	119.74 V
Current	0.08949 A
Power	10.5 W
Power Factor	0.9776

Summary of Results

Spacing Criteria	0 - 180: 0.48	90 - 270: 0.48	Zone	Lumens	% of Luminaire
Total Lumen Output	961 LM		0 - 40	849	94%
Luminaire Efficacy	94 LM/W		0 - 60	883	98%
Maximun Candela	1346 CD		0 - 80	899	100%