



White Flanged Trim (2700K, 98CRI, 35°-Clear, 15W)

Polar Plot

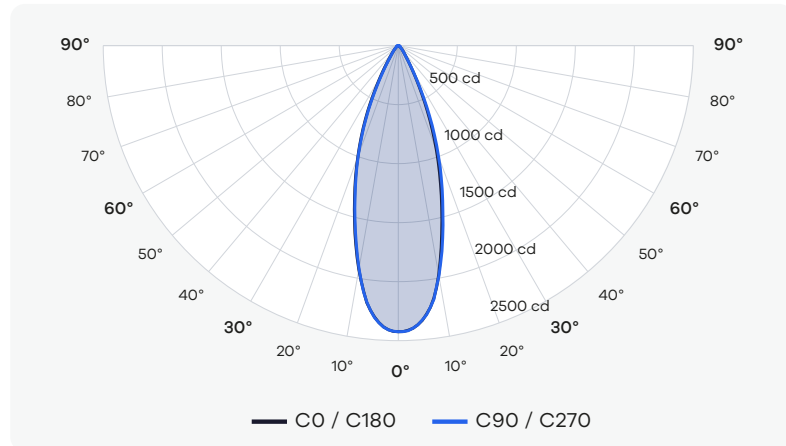

Cone of Light Tabulation

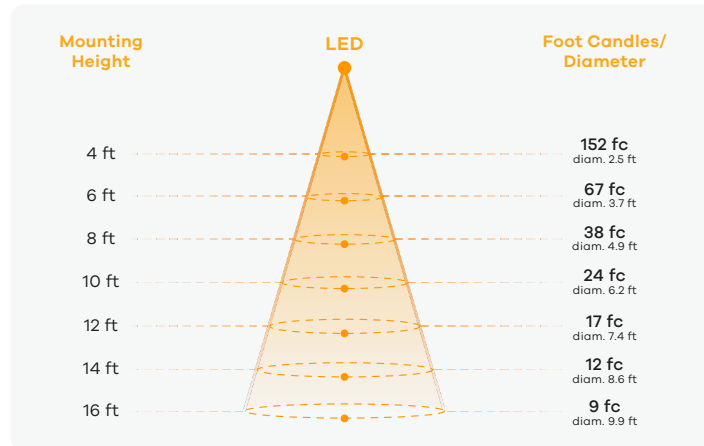

Power Information


Voltage	119.73 V
Current	0.1164 A
Power	13.6 W
Power Factor	0.9781

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	1025 LM		0 - 40	925	93%
Luminaire Efficacy	68 LM/W		0 - 60	975	98%
Maximum Candela	2424 CD		0 - 80	990	100%

White Flanged Trim (3000K, 98CRI, 35°-Clear, 15W)

Polar Plot

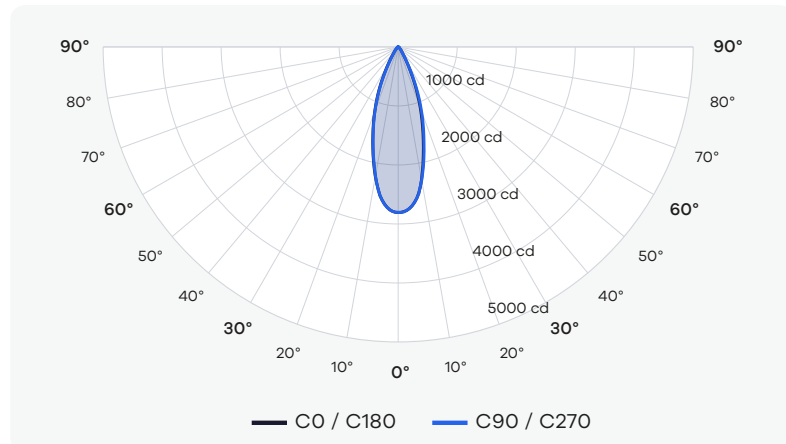

Cone of Light Tabulation

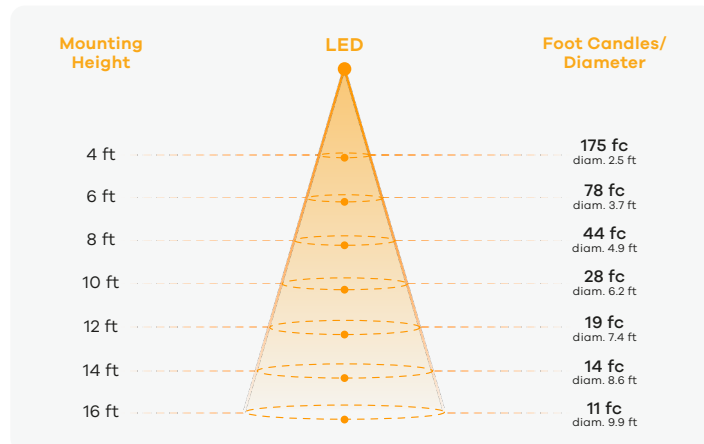

Power Information


Voltage	119.78 V
Current	0.1175 A
Power	13.8 W
Power Factor	0.9785

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	1186 LM		0 - 40	1070	93%
Luminaire Efficacy	89 LM/W		0 - 60	1128	98%
Maximum Candela	2805 CD		0 - 80	1145	100%

White Flanged Trim (3500K, 98CRI, 35°-Clear, 15W)

Polar Plot

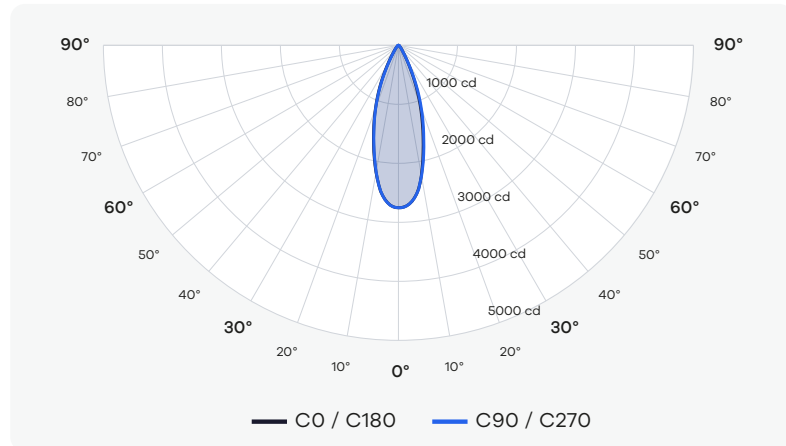

Cone of Light Tabulation

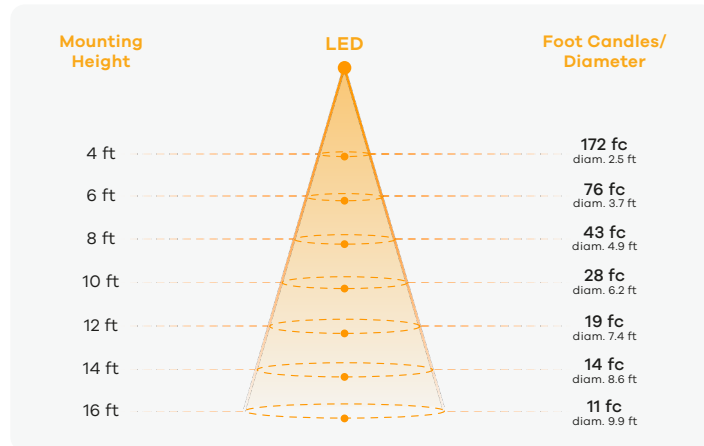

Power Information


Voltage	119.79 V
Current	0.1167 A
Power	13.7 W
Power Factor	0.9781

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	1163 LM		0 - 40	1050	93%
Luminaire Efficacy	78 LM/W		0 - 60	1107	98%
Maximun Candela	2752 CD		0 - 80	1124	100%

White Flanged Trim (2700K, 98CRI, 42°-Clear, 15W)

Polar Plot

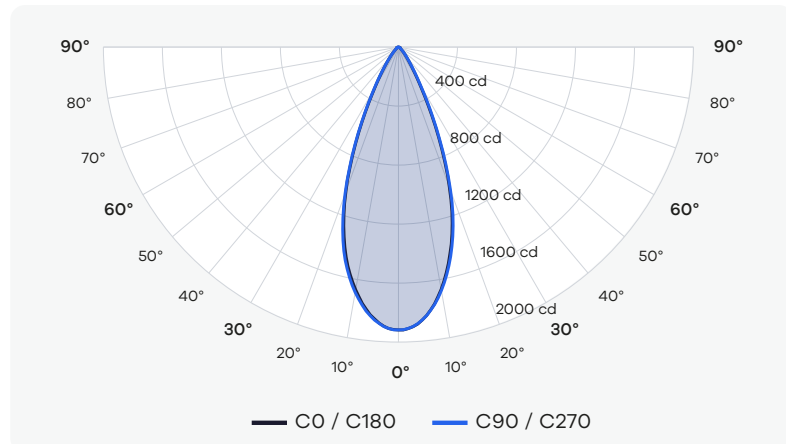

Cone of Light Tabulation

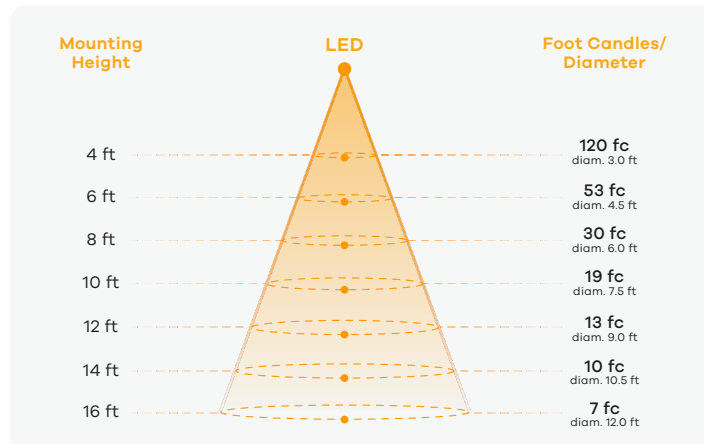

Power Information


Voltage	119.71 V
Current	0.1166 A
Power	13.7 W
Power Factor	0.9781

Summary of Results


Spacing Criteria	0 - 180: 0.38	90 - 270: 0.38	Zone	Lumens	% of Luminaire
Total Lumen Output	1020 LM		0 - 40	915	92%
Luminaire Efficacy	68 LM/W		0 - 60	965	97%
Maximun Candela	1917 CD		0 - 80	989	100%

White Flanged Trim (3000K, 98CRI, 42°-Clear, 15W)

Polar Plot

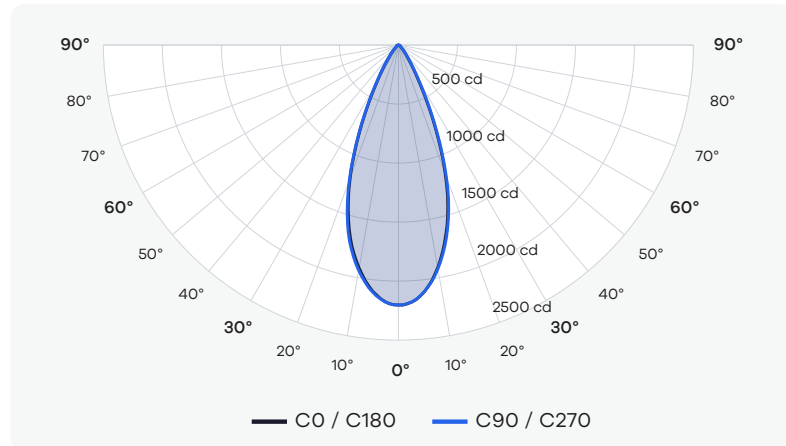

Cone of Light Tabulation

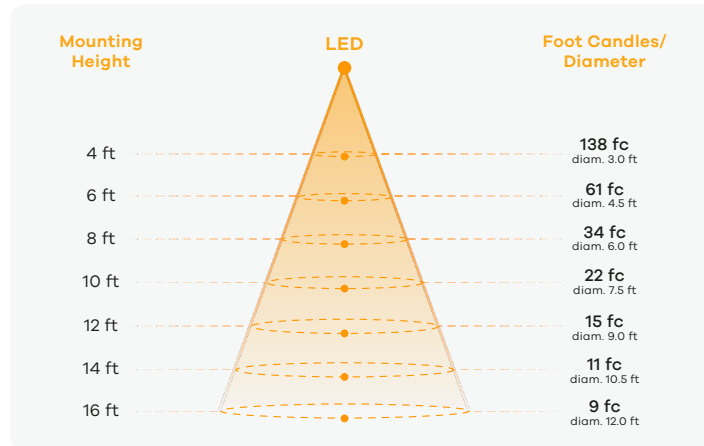

Power Information


Voltage	119.78 V
Current	0.1173 A
Power	13.8 W
Power Factor	0.9784

Summary of Results


Spacing Criteria	0 - 180: 0.38	90 - 270: 0.38	Zone	Lumens	% of Luminaire
Total Lumen Output	1172 LM		0 - 40	1052	92%
Luminaire Efficacy	88 LM/W		0 - 60	1109	97%
Maximun Candela	2203 CD		0 - 80	1137	100%

White Flanged Trim (3500K, 98CRI, 42°-Clear, 15W)

Polar Plot

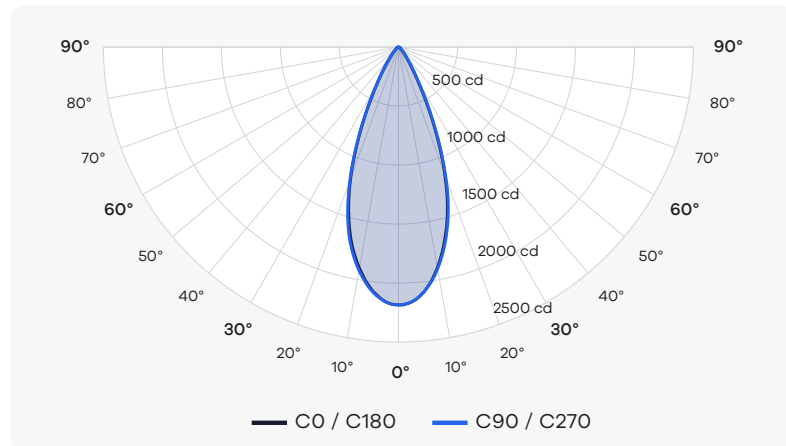

Cone of Light Tabulation

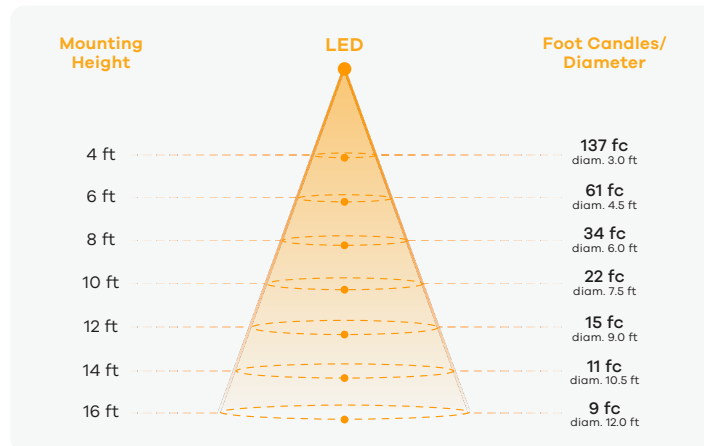

Power Information


Voltage	119.80 V
Current	0.1167 A
Power	13.7 W
Power Factor	0.9781

Summary of Results


Spacing Criteria	0 - 180: 0.38	90 - 270: 0.38	Zone	Lumens	% of Luminaire
Total Lumen Output	1162 LM		0 - 40	1043	92%
Luminaire Efficacy	77 LM/W		0 - 60	1100	97%
Maximun Candela	2185 CD		0 - 80	1127	100%

White Flanged Trim (2700K, 98CRI, 52°-Clear, 15W)

Polar Plot

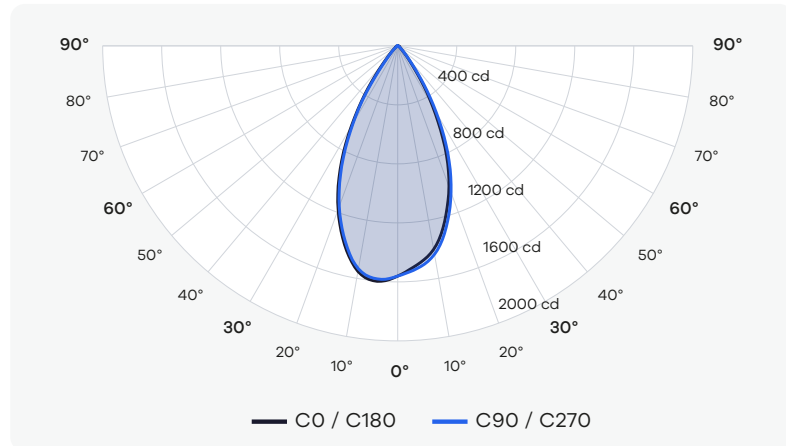

Cone of Light Tabulation

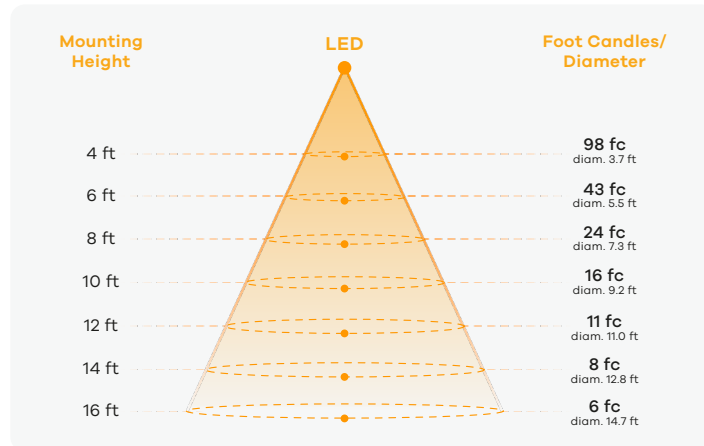

Power Information


Voltage	119.71 V
Current	0.1167 A
Power	13.7 W
Power Factor	0.9781

Summary of Results


Spacing Criteria	0 - 180: 0.46	90 - 270: 0.46	Zone	Lumens	% of Luminaire
Total Lumen Output	1165 LM		0 - 40	977	92%
Luminaire Efficacy	78 LM/W		0 - 60	1032	97%
Maximum Candela	1561 CD		0 - 80	1056	100%

White Flanged Trim (3000K, 98CRI, 52°-Clear, 15W)

Polar Plot

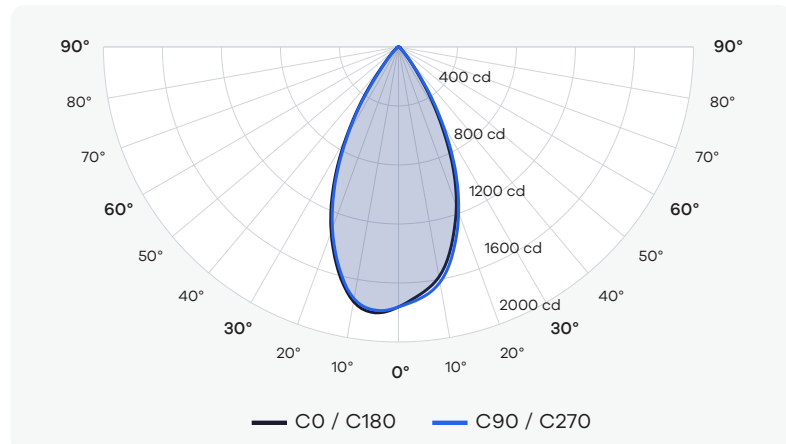

Cone of Light Tabulation

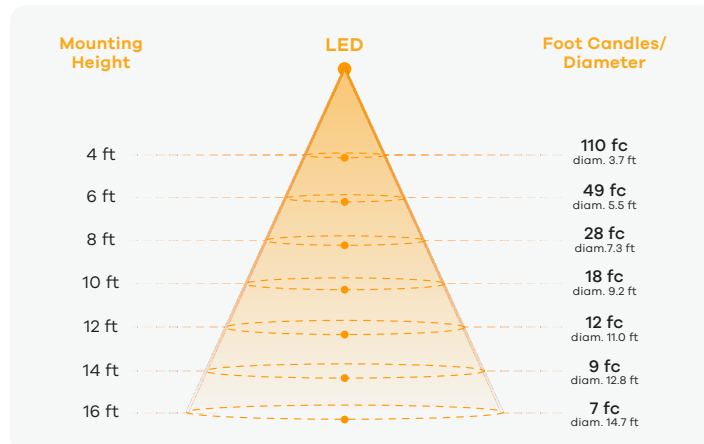

Power Information


Voltage	119.78 V
Current	0.1173 A
Power	13.8 W
Power Factor	0.9784

Summary of Results


Spacing Criteria	0 - 180: 0.46	90 - 270: 0.46	Zone	Lumens	% of Luminaire
Total Lumen Output	1316 LM		0 - 40	1103	92%
Luminaire Efficacy	98 LM/W		0 - 60	1165	97%
Maximum Candela	1762 CD		0 - 80	1193	100%

White Flanged Trim (3500K, 98CRI, 52°-Clear, 15W)

Polar Plot

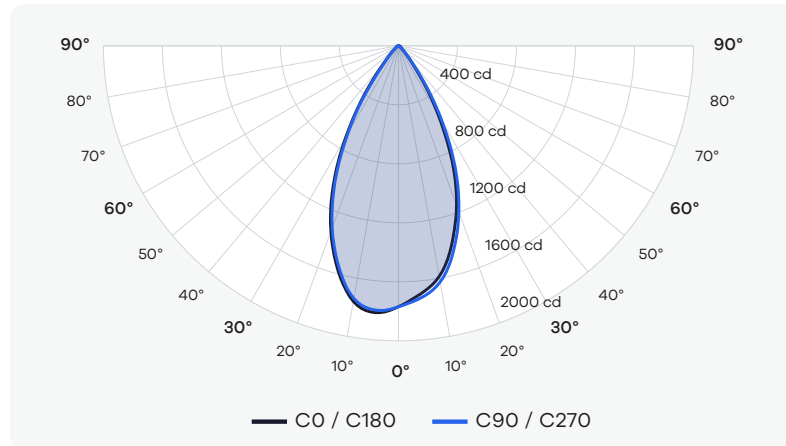

Cone of Light Tabulation

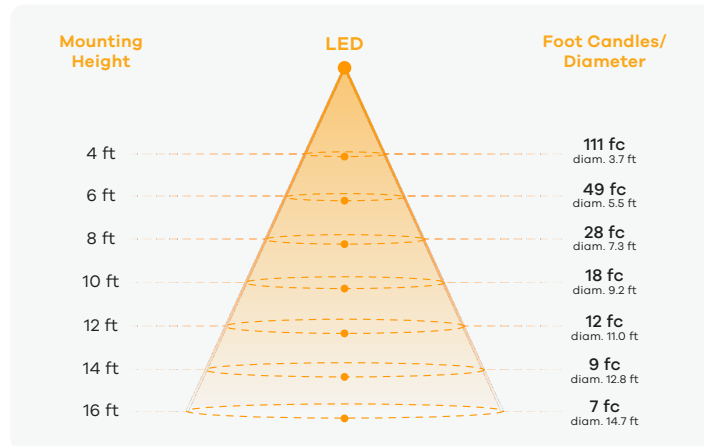

Power Information


Voltage	119.78 V
Current	0.1168 A
Power	13.7 W
Power Factor	0.9781

Summary of Results


Spacing Criteria	0 - 180: 0.46	90 - 270: 0.46	Zone	Lumens	% of Luminaire
Total Lumen Output	1321 LM		0 - 40	1108	92%
Luminaire Efficacy	88 LM/W		0 - 60	1169	97%
Maximum Candela	1769 CD		0 - 80	1197	100%

White Flanged Trim (2700K, 98CRI, 34°-Silver Reflector, 15W)

Polar Plot

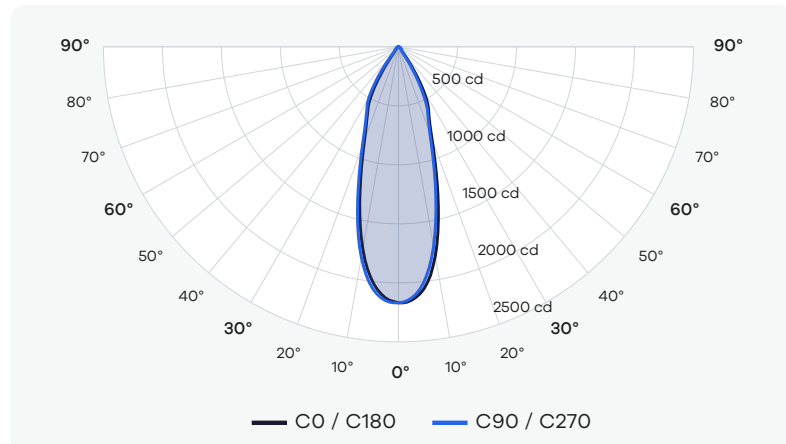

Cone of Light Tabulation

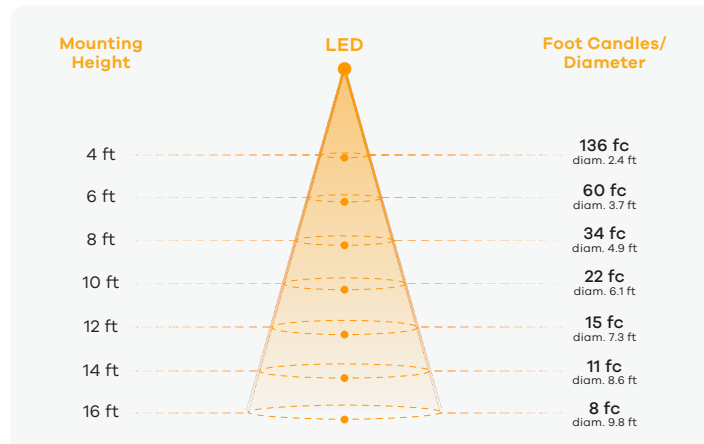

Power Information


Voltage	119.72 V
Current	0.1168 A
Power	13.7 W
Power Factor	0.9781

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	1014 LM		0 - 40	933	93%
Luminaire Efficacy	68 LM/W		0 - 60	979	98%
Maximum Candela	2169 CD		0 - 80	998	100%

White Flanged Trim (3000K, 98CRI, 34°-Silver Reflector, 15W)

Polar Plot

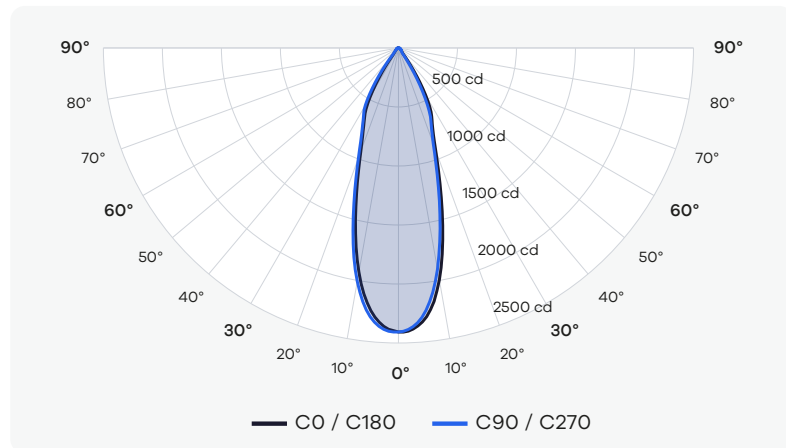

Cone of Light Tabulation

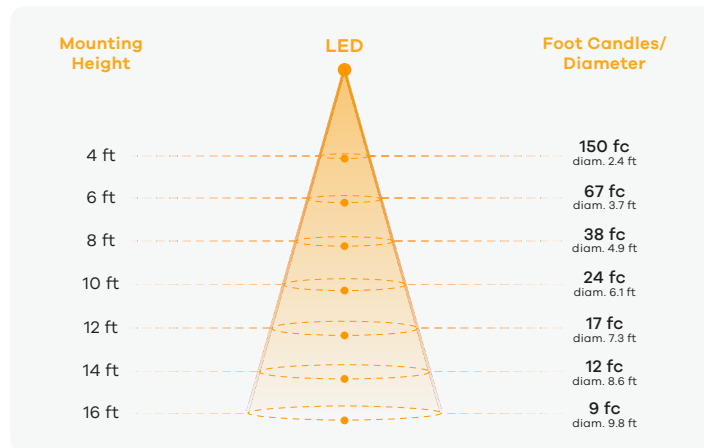

Power Information


Voltage	119.79 V
Current	0.1172 A
Power	13.7 W
Power Factor	0.9785

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	1125 LM		0 - 40	1035	93%
Luminaire Efficacy	84 LM/W		0 - 60	1086	98%
Maximun Candela	2407 CD		0 - 80	1108	100%

White Flanged Trim (3500K, 98CRI, 34°-Silver Reflector, 15W)

Polar Plot

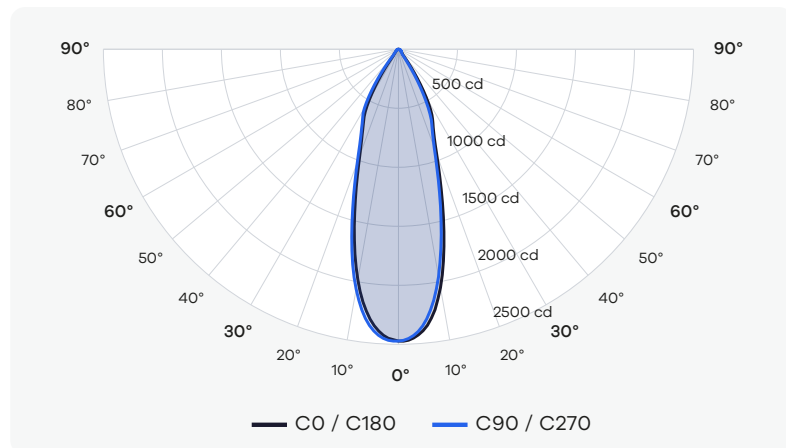

Cone of Light Tabulation

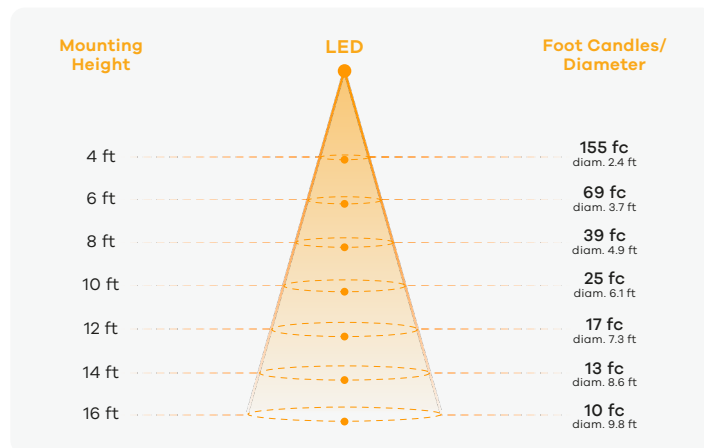

Power Information


Voltage	119.79 V
Current	0.1167 A
Power	13.7 W
Power Factor	0.9781

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	1156 LM		0 - 40	1064	93%
Luminaire Efficacy	77 LM/W		0 - 60	1116	98%
Maximun Candela	2473 CD		0 - 80	1138	100%

White Flanged Trim (2700K, 98CRI, 53°-Silver Reflector, 15W)

Polar Plot

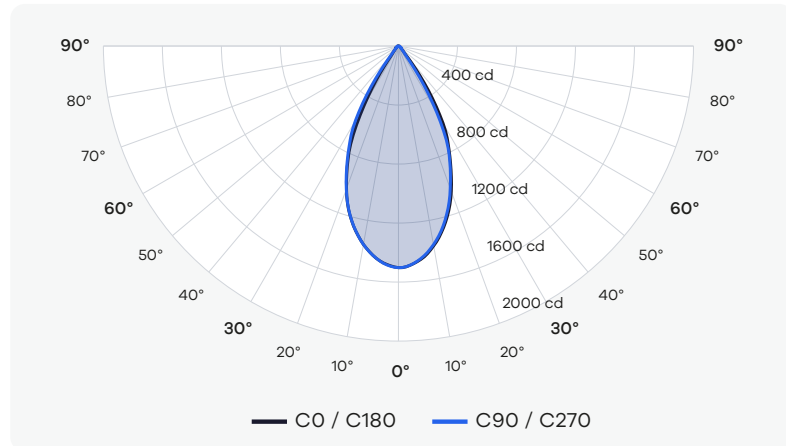

Cone of Light Tabulation

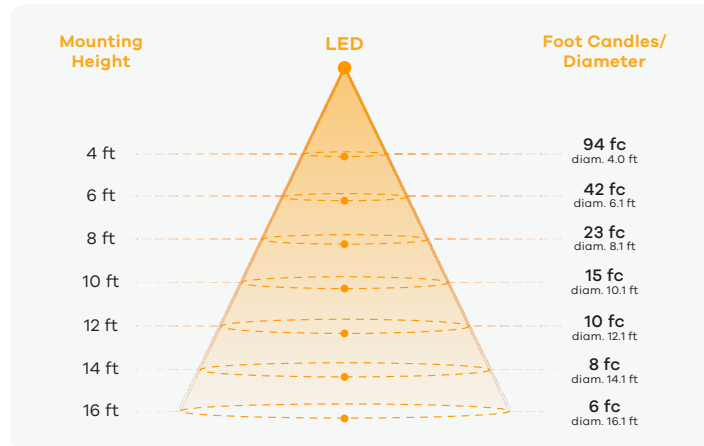

Power Information


Voltage	119.80 V
Current	0.1173 A
Power	13.7 W
Power Factor	0.9781

Summary of Results


Spacing Criteria	0 - 180: 0.5	90 - 270: 0.5	Zone	Lumens	% of Luminaire
Total Lumen Output	1068 LM		0 - 40	1049	93%
Luminaire Efficacy	80 LM/W		0 - 60	1095	98%
Maximun Candela	1502 CD		0 - 80	1116	99%

White Flanged Trim (3000K, 98CRI, 53°-Silver Reflector, 15W)

Polar Plot

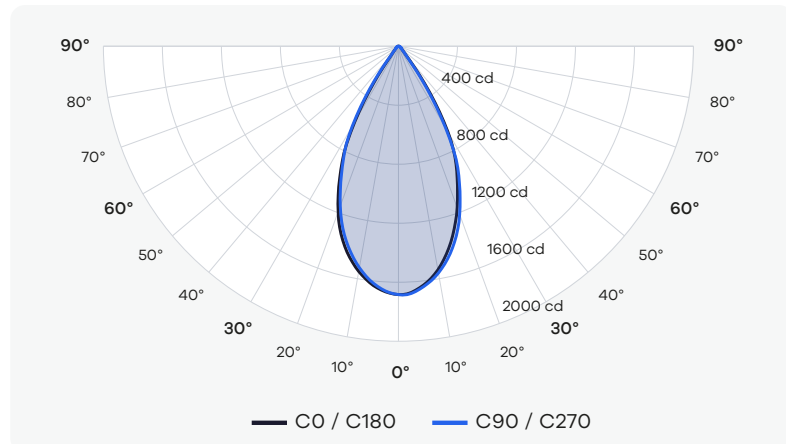

Cone of Light Tabulation

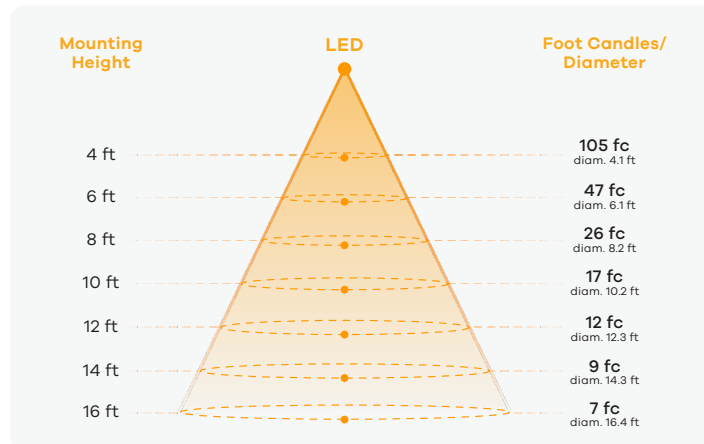

Power Information


Voltage	119.80 V
Current	0.1173 A
Power	13.7 W
Power Factor	0.9781

Summary of Results


Spacing Criteria	0 - 180: 0.51	90 - 270: 0.51	Zone	Lumens	% of Luminaire
Total Lumen Output	1217 LM		0 - 40	1161	94%
Luminaire Efficacy	90 LM/W		0 - 60	1214	98%
Maximun Candela	1684 CD		0 - 80	1235	100%

White Flanged Trim (3500K, 98CRI, 53°-Silver Reflector, 15W)

Polar Plot

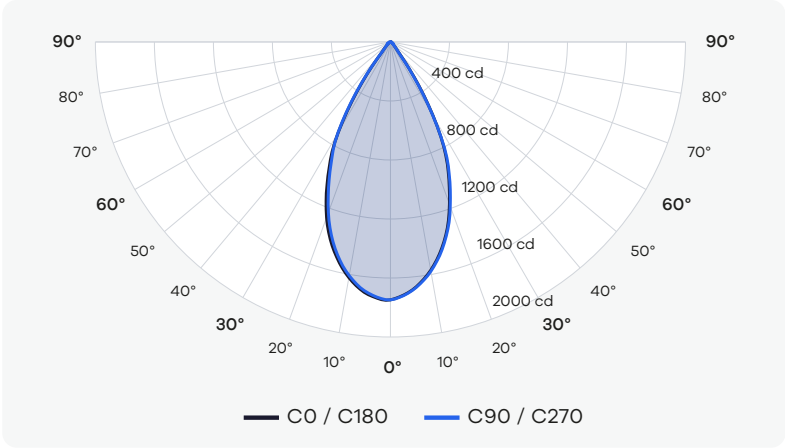

Cone of Light Tabulation

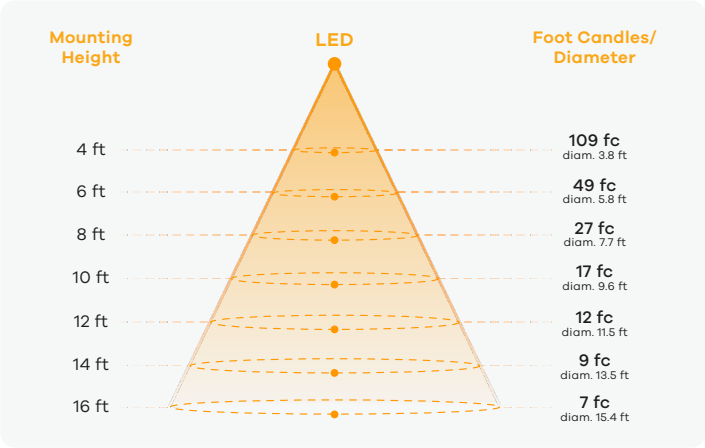

Power Information

Voltage	119.80 V
Current	0.1173 A
Power	13.7 W
Power Factor	0.9781

Summary of Results

Spacing Criteria	0 - 180: 0.48	90 - 270: 0.48	Zone	Lumens	% of Luminaire
Total Lumen Output	1252 LM		0 - 40	1109	94%
Luminaire Efficacy	94 LM/W		0 - 60	1155	98%
Maximun Candela	1748 CD		0 - 80	1177	100%