



White Round Shallow (2700K, 98CRI, 35°-Clear, 12W)

Polar Plot

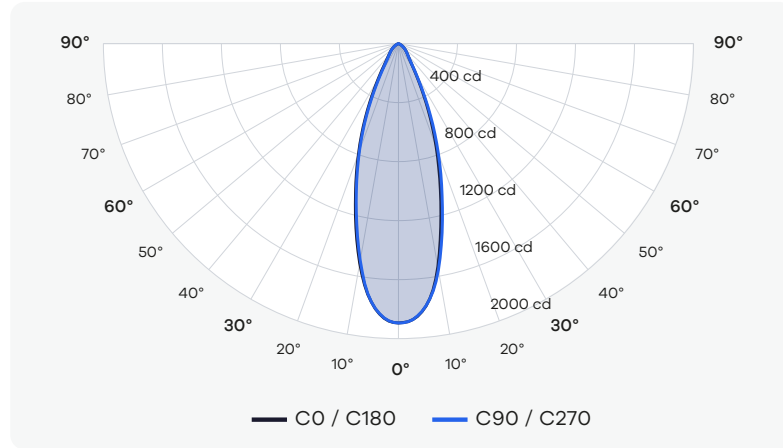

Cone of Light Tabulation

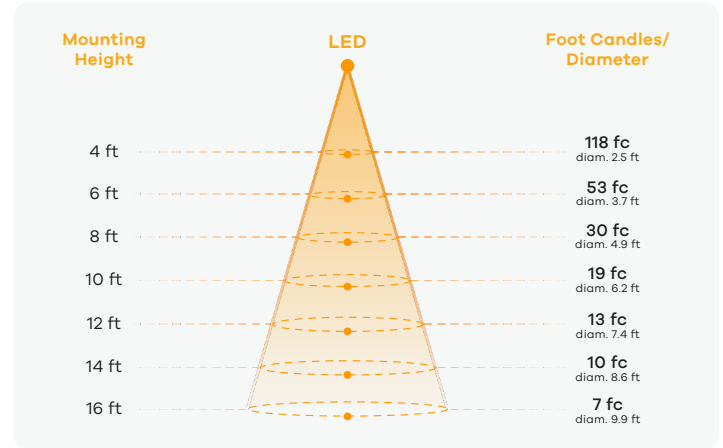

Power Information


Voltage	119.84 V
Current	0.08936 A
Power	10.5 W
Power Factor	0.9776

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	886 LM		0 - 40	765	88%
Luminaire Efficacy	74 LM/W		0 - 60	857	98%
Maximun Candela	1894 CD		0 - 80	871	100%

White Round Shallow (3000K, 98CRI, 35°-Clear, 12W)

Polar Plot

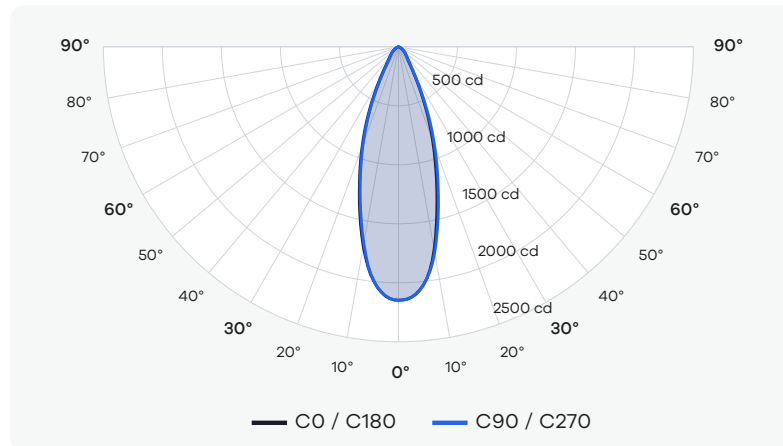

Cone of Light Tabulation

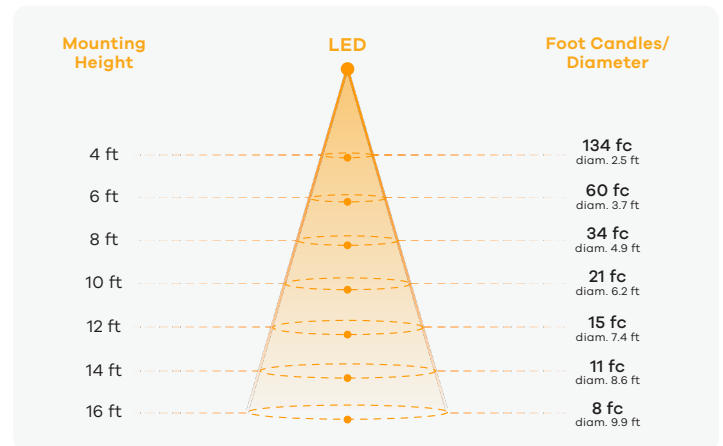

Power Information


Voltage	119.82 V
Current	0.08972 A
Power	10.5 W
Power Factor	0.9779

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	1005 LM		0 - 40	868	88%
Luminaire Efficacy	98 LM/W		0 - 60	972	98%
Maximun Candela	2148 CD		0 - 80	989	100%

White Round Shallow (3500K, 98CRI, 35°-Clear, 12W)

Polar Plot

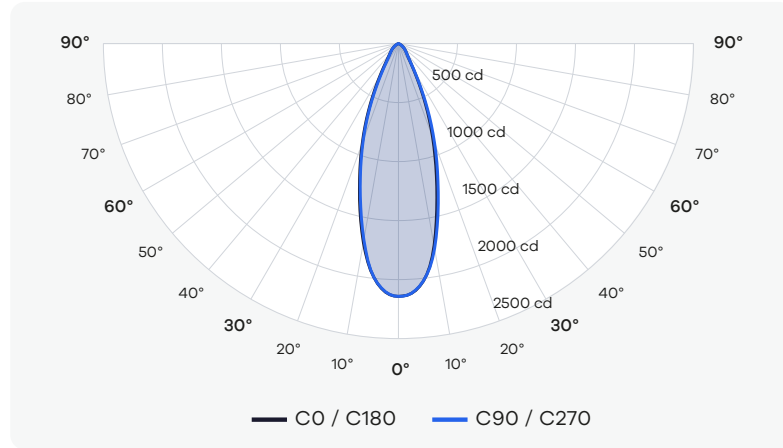

Cone of Light Tabulation

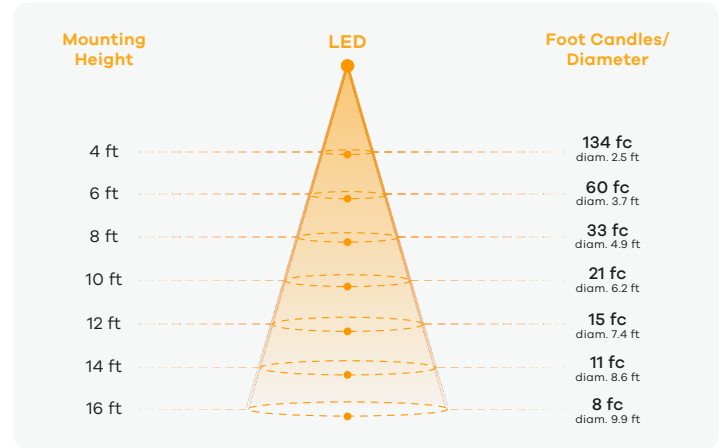

Power Information


Voltage	119.83 V
Current	0.08936 A
Power	10.5 W
Power Factor	0.9778

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	1002 LM		0 - 40	865	88%
Luminaire Efficacy	83 LM/W		0 - 60	969	98%
Maximun Candela	2142 CD		0 - 80	986	100%

White Round Shallow (2700K, 98CRI, 42°-Clear, 12W)

Polar Plot

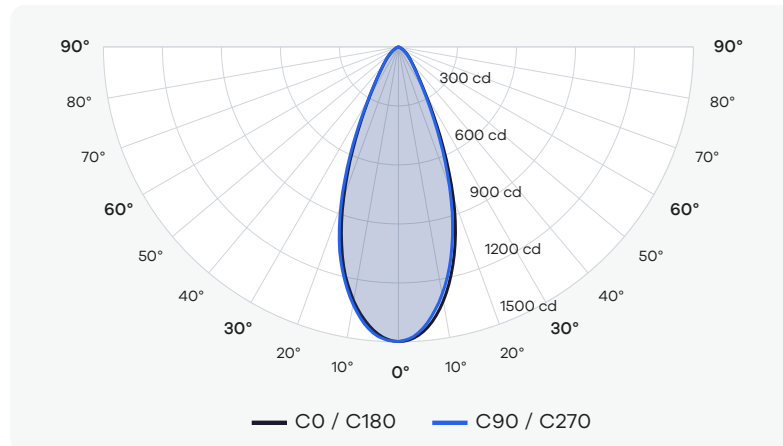

Cone of Light Tabulation

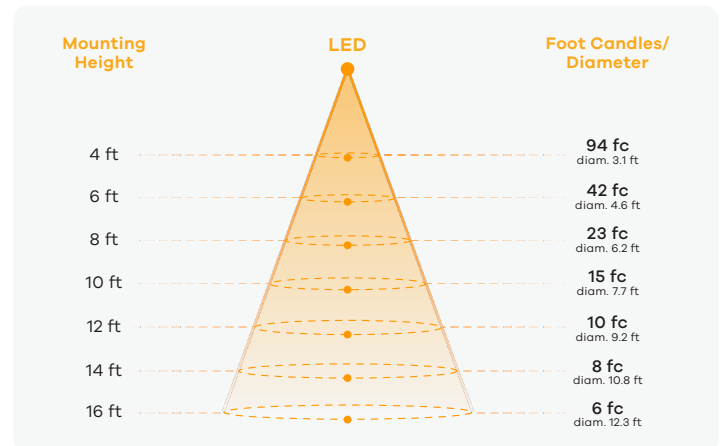

Power Information


Voltage	119.72 V
Current	0.08974 A
Power	10.5 W
Power Factor	0.9776

Summary of Results


Spacing Criteria	0 - 180: 0.38	90 - 270: 0.38	Zone	Lumens	% of Luminaire
Total Lumen Output	888 LM		0 - 40	773	87%
Luminaire Efficacy	74 LM/W		0 - 60	871	98%
Maximun Candela	1498 CD		0 - 80	885	100%

White Round Shallow (3000K, 98CRI, 42°-Clear, 12W)

Polar Plot

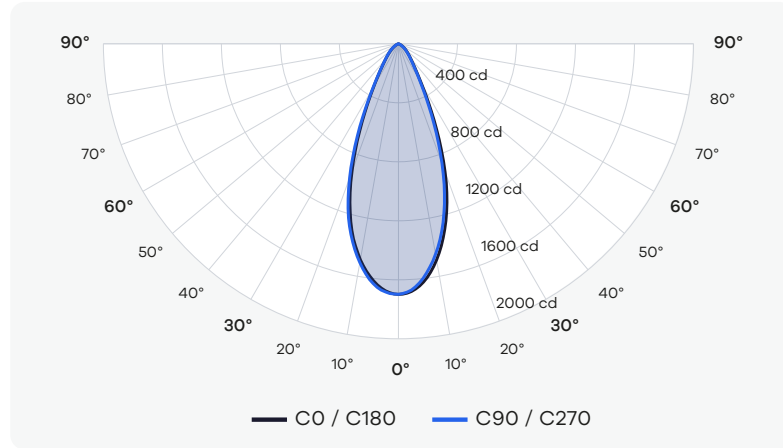

Cone of Light Tabulation

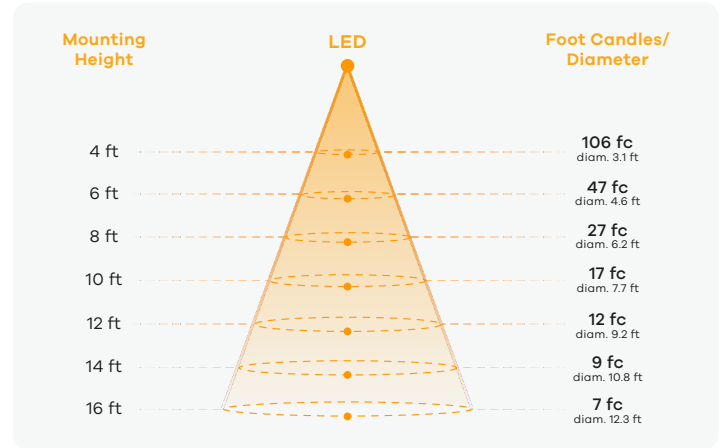

Power Information


Voltage	119.82 V
Current	0.08961 A
Power	10.5 W
Power Factor	0.9779

Summary of Results


Spacing Criteria	0 - 180: 0.38	90 - 270: 0.38	Zone	Lumens	% of Luminaire
Total Lumen Output	1007 LM		0 - 40	877	87%
Luminaire Efficacy	98 LM/W		0 - 60	987	98%
Maximun Candela	1699 CD		0 - 80	1004	100%

White Round Shallow (3500K, 98CRI, 42°-Clear, 12W)

Polar Plot

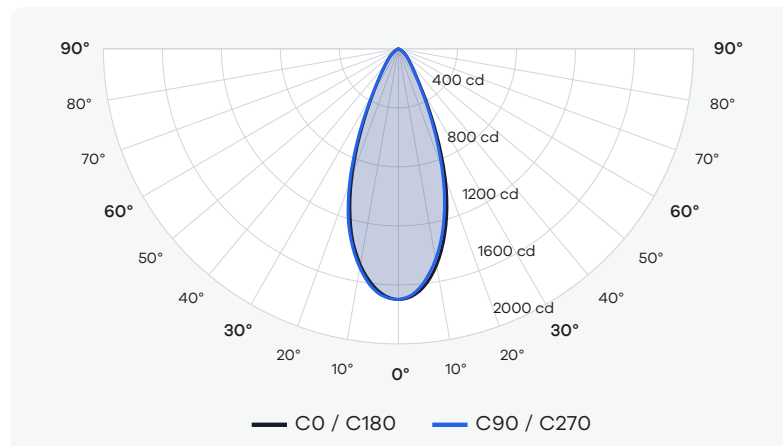

Cone of Light Tabulation

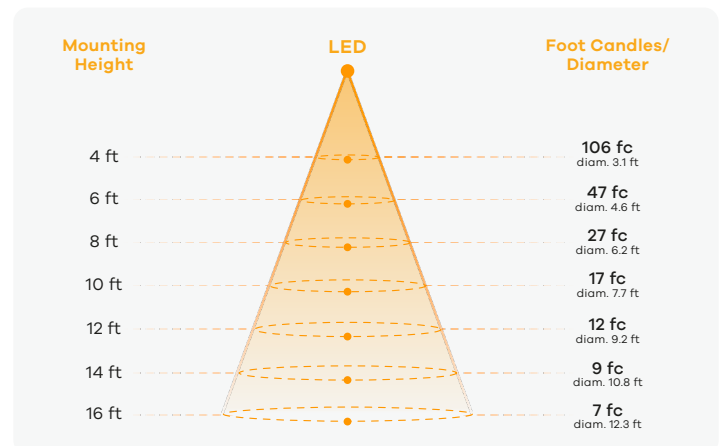

Power Information


Voltage	119.83 V
Current	0.08927 A
Power	10.5 W
Power Factor	0.9778

Summary of Results


Spacing Criteria	0 - 180: 0.38	90 - 270: 0.38	Zone	Lumens	% of Luminaire
Total Lumen Output	1007 LM		0 - 40	877	87%
Luminaire Efficacy	84 LM/W		0 - 60	987	98%
Maximun Candela	1699 CD		0 - 80	1004	100%

White Round Shallow (2700K, 98CRI, 53°-Clear, 12W)

Polar Plot

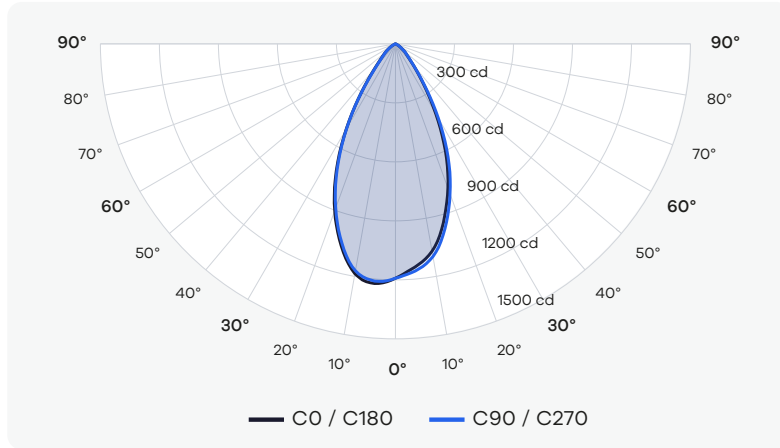

Cone of Light Tabulation

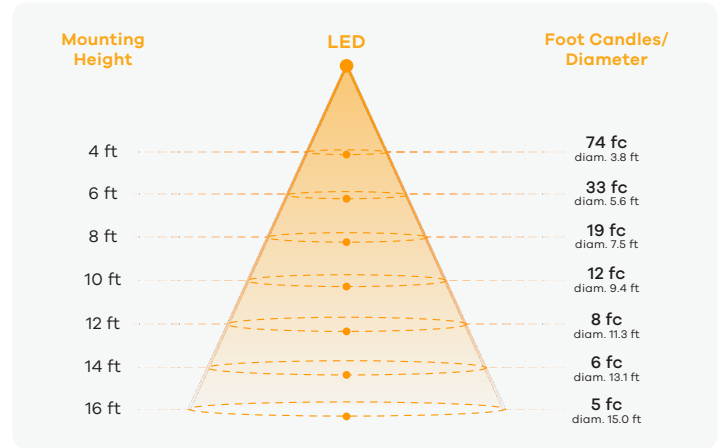

Power Information


Voltage	119.74 V
Current	0.08963 A
Power	10.5 W
Power Factor	0.9776

Summary of Results


Spacing Criteria	0 - 180: 0.47	90 - 270: 0.47	Zone	Lumens	% of Luminaire
Total Lumen Output	984 LM		0 - 40	797	88%
Luminaire Efficacy	82 LM/W		0 - 60	898	99%
Maximun Candela	1192 CD		0 - 80	908	100%

White Round Shallow (3000K, 98CRI, 53°-Clear, 12W)

Polar Plot

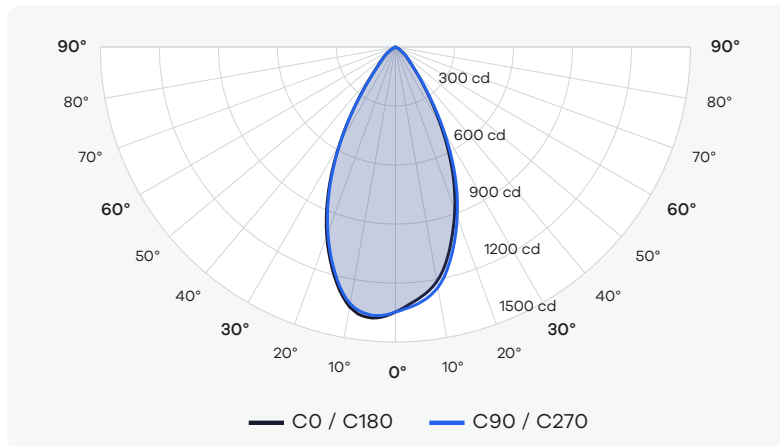

Cone of Light Tabulation

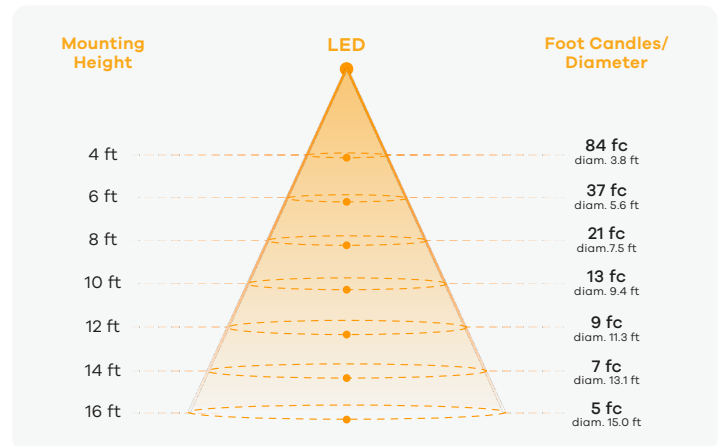

Power Information


Voltage	119.83 V
Current	0.08950 A
Power	10.5 W
Power Factor	0.9779

Summary of Results


Spacing Criteria	0 - 180: 0.47	90 - 270: 0.47	Zone	Lumens	% of Luminaire
Total Lumen Output	1112 LM		0 - 40	901	88%
Luminaire Efficacy	108 LM/W		0 - 60	1015	99%
Maximun Candela	1347 CD		0 - 80	1026	100%

White Round Shallow (3500K, 98CRI, 53°-Clear, 12W)

Polar Plot

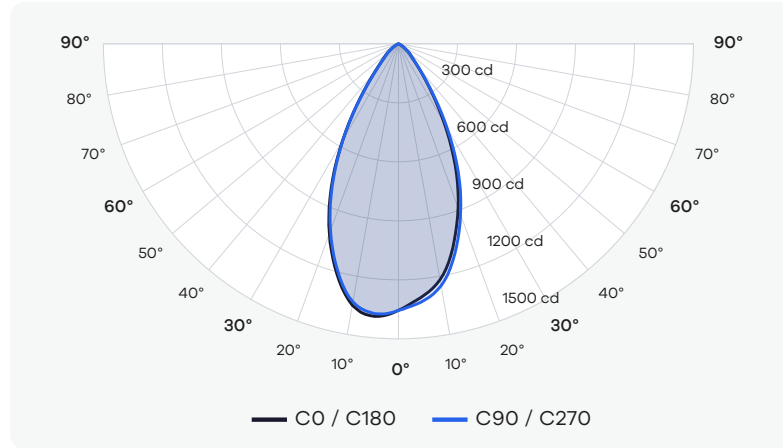

Cone of Light Tabulation

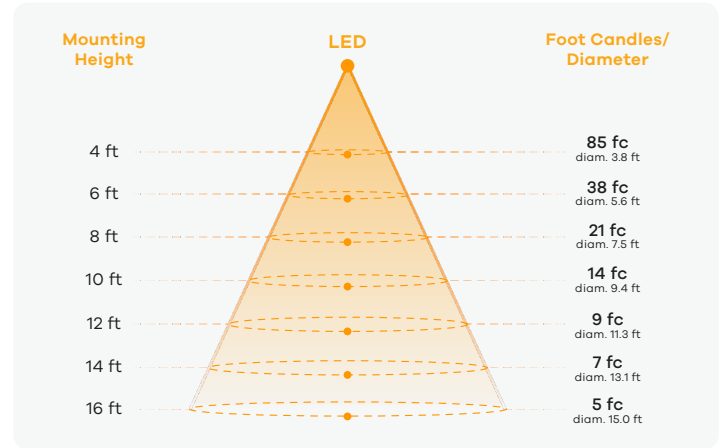

Power Information


Voltage	119.83 V
Current	0.08934 A
Power	10.5 W
Power Factor	0.9778

Summary of Results


Spacing Criteria	0 - 180: 0.47	90 - 270: 0.47	Zone	Lumens	% of Luminaire
Total Lumen Output	1119 LM		0 - 40	907	88%
Luminaire Efficacy	93 LM/W		0 - 60	1021	99%
Maximun Candela	1355 CD		0 - 80	1032	100%

White Round Shallow (2700K, 98CRI, 34°-Silver Reflector, 12W)

Polar Plot

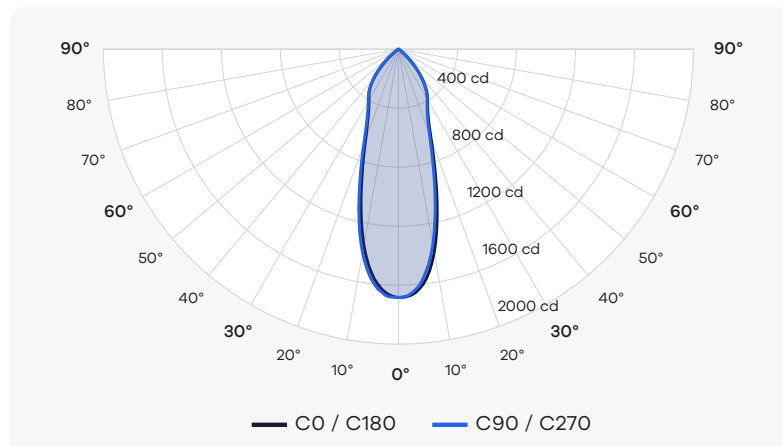

Cone of Light Tabulation

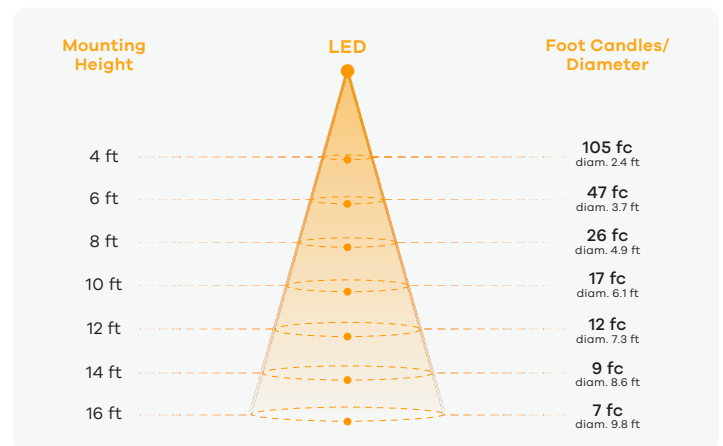

Power Information


Voltage	119.74 V
Current	0.08953 A
Power	10.5 W
Power Factor	0.9776

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	990 LM		0 - 40	843	87%
Luminaire Efficacy	82 LM/W		0 - 60	967	99%
Maximun Candela	1684 CD		0 - 80	973	99%

White Round Shallow (3000K, 98CRI, 34°-Silver Reflector, 12W)

Polar Plot

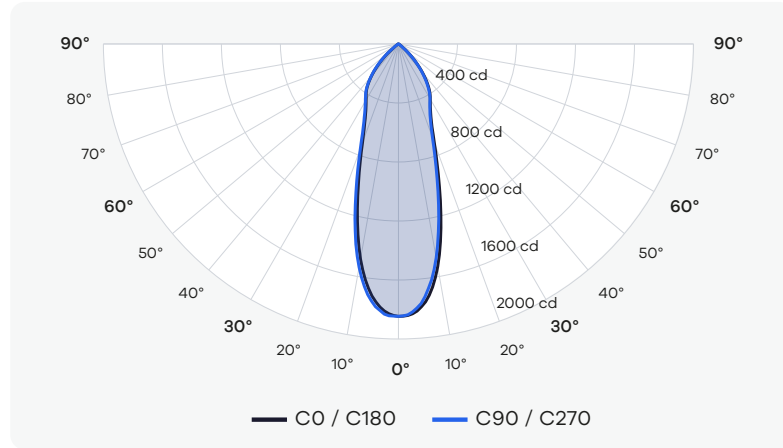

Cone of Light Tabulation

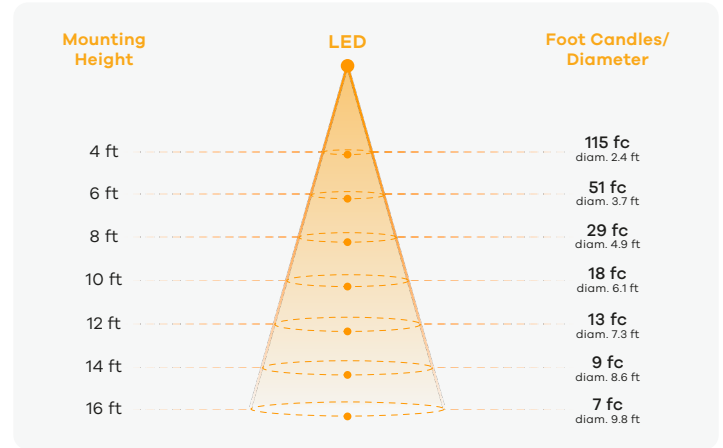

Power Information


Voltage	119.83 V
Current	0.08949 A
Power	10.5 W
Power Factor	0.9779

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	1086 LM		0 - 40	925	87%
Luminaire Efficacy	105 LM/W		0 - 60	1060	99%
Maximun Candela	1847 CD		0 - 80	1067	100%

White Round Shallow (3500K, 98CRI, 34°-Silver Reflector, 12W)

Polar Plot

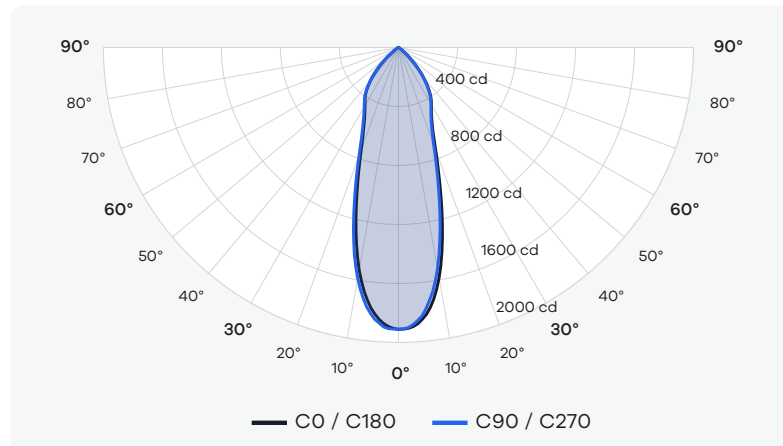

Cone of Light Tabulation

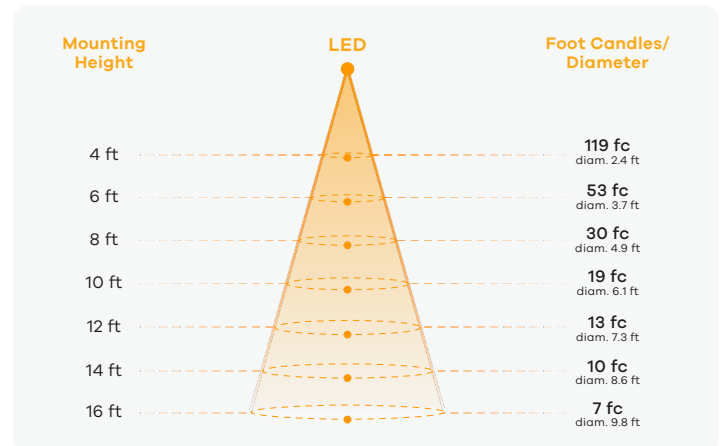

Power Information


Voltage	119.82 V
Current	0.08925 A
Power	10.5 W
Power Factor	0.9778

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	1123 LM		0 - 40	957	87%
Luminaire Efficacy	94 LM/W		0 - 60	1097	99%
Maximun Candela	1911 CD		0 - 80	1105	100%

White Round Shallow (2700K, 98CRI, 54°-Silver Reflector, 12W)

Polar Plot

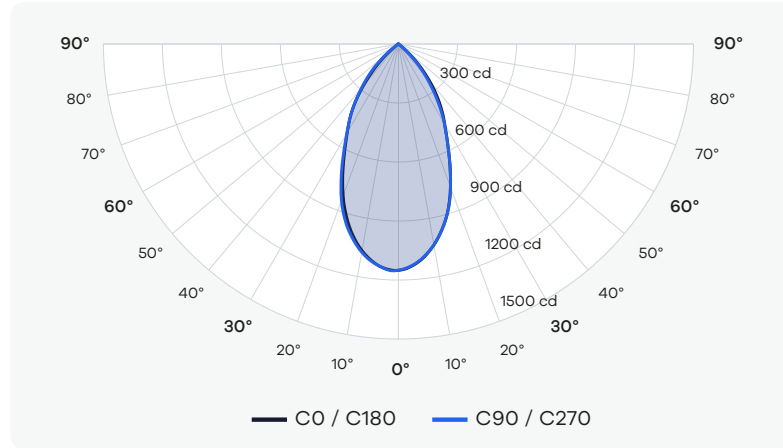

Cone of Light Tabulation

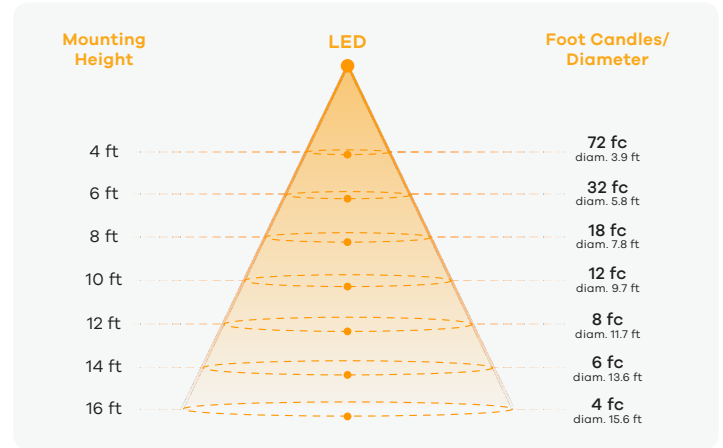

Power Information


Voltage	119.74 V
Current	0.08949 A
Power	10.5 W
Power Factor	0.9776

Summary of Results


Spacing Criteria	0 - 180: 0.49	90 - 270: 0.49	Zone	Lumens	% of Luminaire
Total Lumen Output	1030 LM		0 - 40	863	88%
Luminaire Efficacy	101 LM/W		0 - 60	977	100%
Maximun Candela	1151 CD		0 - 80	981	100%

White Round Shallow (3000K, 98CRI, 54°-Silver Reflector, 12W)

Polar Plot

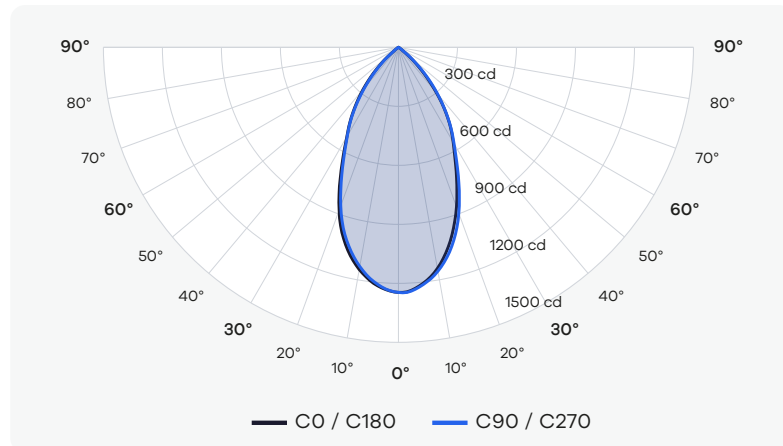

Cone of Light Tabulation

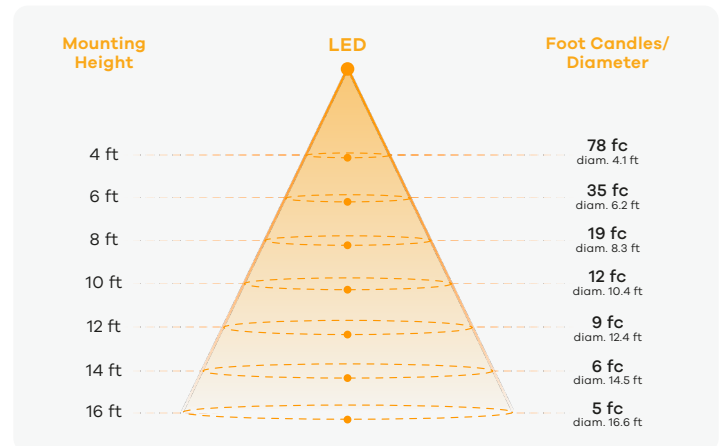

Power Information


Voltage	119.74 V
Current	0.08949 A
Power	10.5 W
Power Factor	0.9776

Summary of Results


Spacing Criteria	0 - 180: 0.52	90 - 270: 0.52	Zone	Lumens	% of Luminaire
Total Lumen Output	1126 LM		0 - 40	985	86%
Luminaire Efficacy	110 LM/W		0 - 60	1135	100%
Maximun Candela	1246 CD		0 - 80	1140	100%

White Round Shallow (3500K, 98CRI, 54°-Silver Reflector, 12W)

Polar Plot

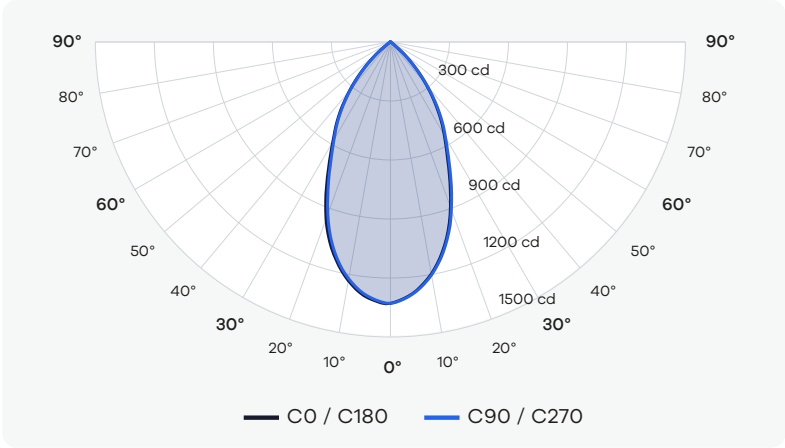

Cone of Light Tabulation

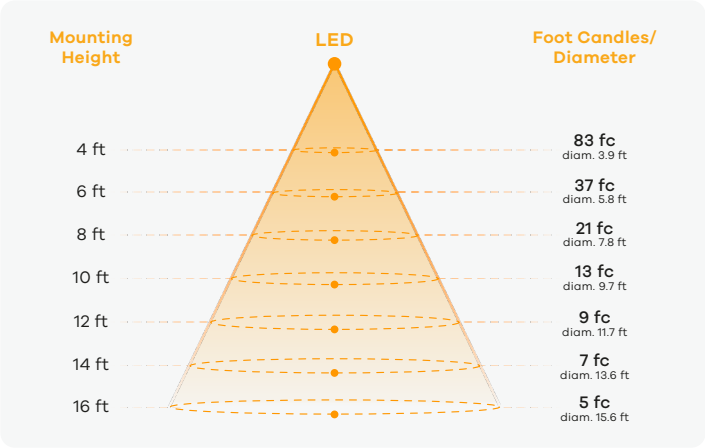

Power Information

Voltage	119.74 V
Current	0.08949 A
Power	10.5 W
Power Factor	0.9776

Summary of Results

Spacing Criteria	0 - 180: 0.49	90 - 270: 0.49	Zone	Lumens	% of Luminaire
Total Lumen Output	1185 LM		0 - 40	996	87%
Luminaire Efficacy	116 LM/W		0 - 60	1134	100%
Maximun Candela	1329 CD		0 - 80	1138	100%