



White Round Shallow (2700K, 98CRI, 35°-Clear, 15W)

Polar Plot

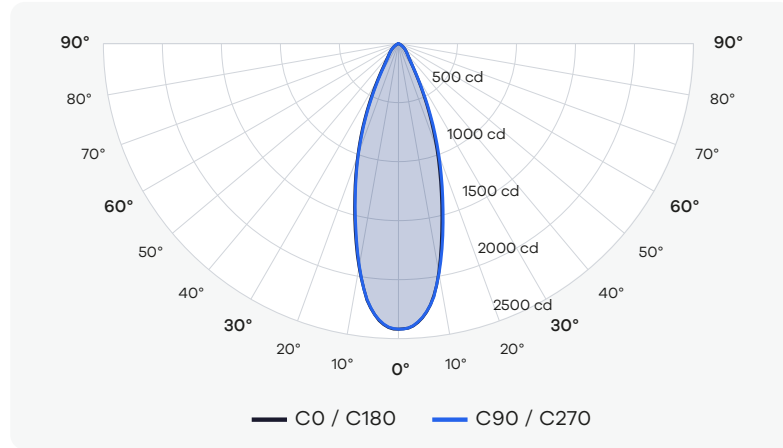

Cone of Light Tabulation

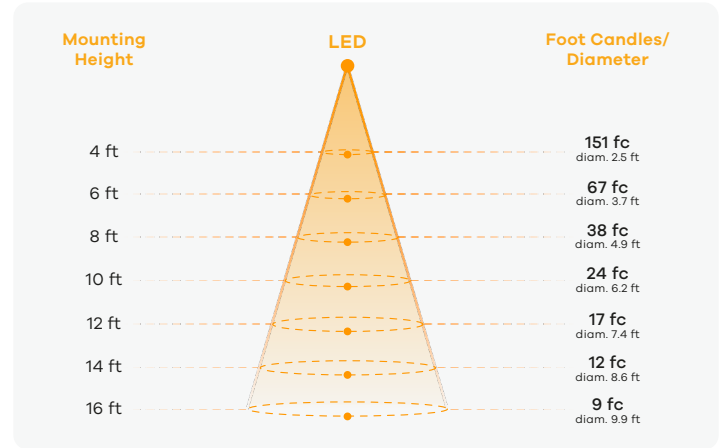

Power Information


Voltage	119.73 V
Current	0.1164 A
Power	13.6 W
Power Factor	0.9781

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	1127 LM		0 - 40	975	88%
Luminaire Efficacy	75 LM/W		0 - 60	1090	98%
Maximun Candela	2420 CD		0 - 80	1108	100%

White Round Shallow (3000K, 98CRI, 35°-Clear, 15W)

Polar Plot

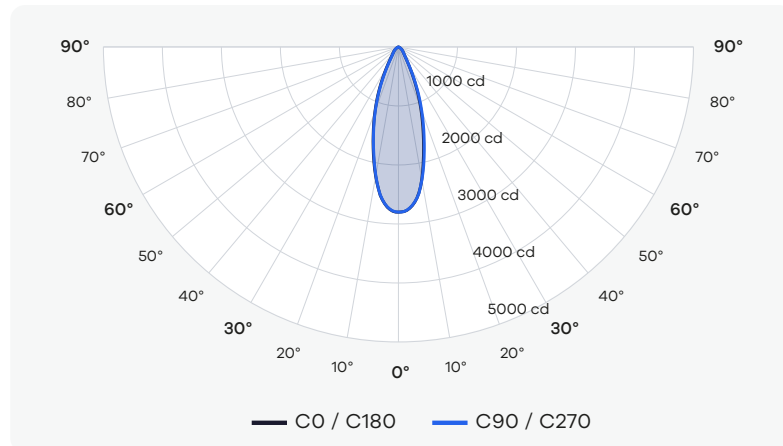

Cone of Light Tabulation

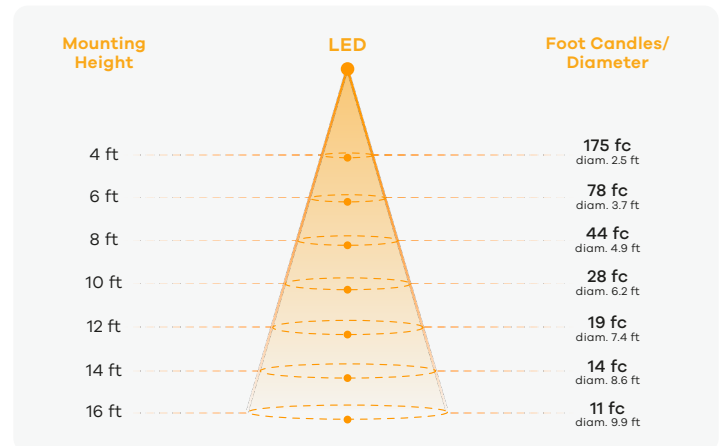

Power Information


Voltage	119.78 V
Current	0.1175 A
Power	13.8 W
Power Factor	0.9785

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	1304 LM		0 - 40	1129	88%
Luminaire Efficacy	98 LM/W		0 - 60	1261	98%
Maximun Candela	2800 CD		0 - 80	1282	100%

White Round Shallow (3500K, 98CRI, 35°-Clear, 15W)

Polar Plot

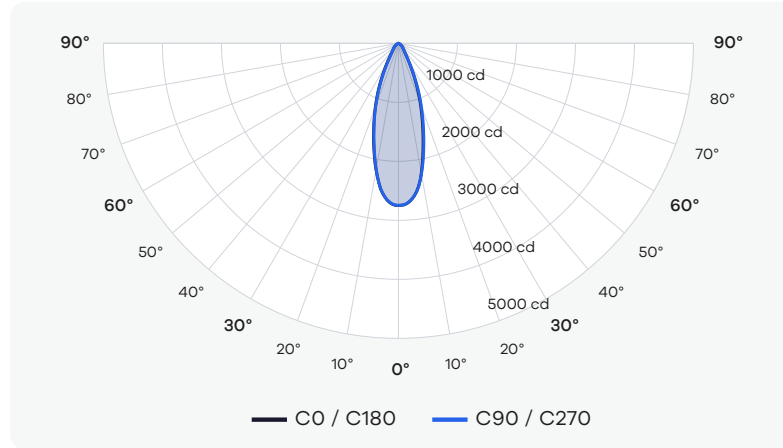

Cone of Light Tabulation

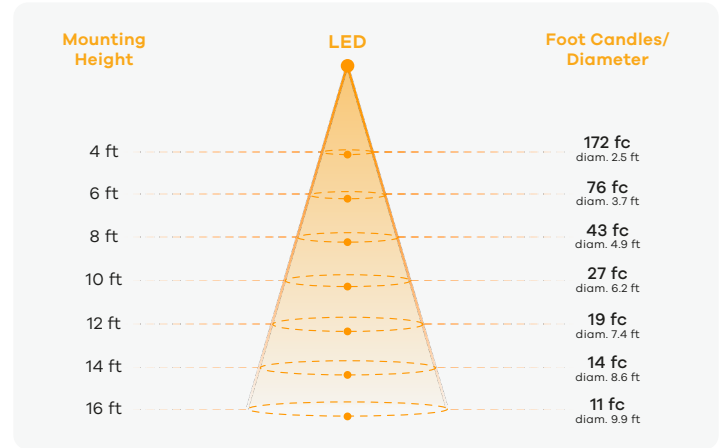

Power Information


Voltage	119.79 V
Current	0.1167 A
Power	13.7 W
Power Factor	0.9781

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	1280 LM		0 - 40	1107	88%
Luminaire Efficacy	85 LM/W		0 - 60	1238	98%
Maximun Candela	2747 CD		0 - 80	1258	100%

White Round Shallow (2700K, 98CRI, 42°-Clear, 15W)

Polar Plot

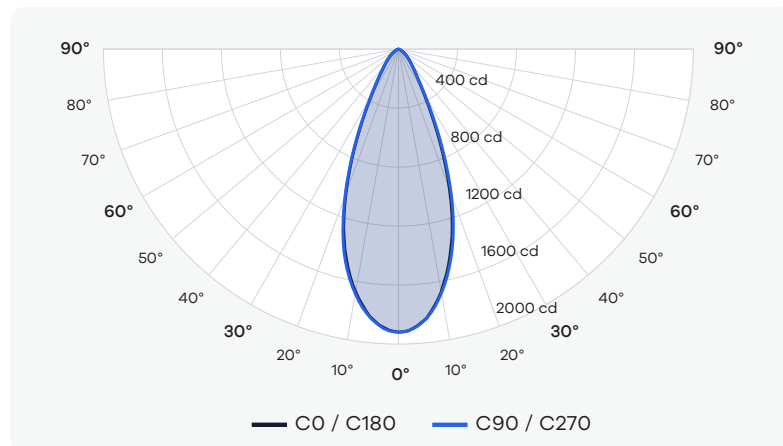

Cone of Light Tabulation

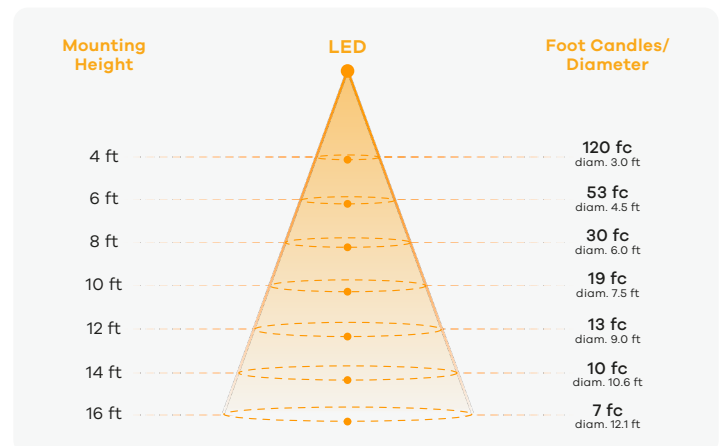

Power Information


Voltage	119.71 V
Current	0.1166 A
Power	13.7 W
Power Factor	0.9781

Summary of Results


Spacing Criteria	0 - 180: 0.38	90 - 270: 0.38	Zone	Lumens	% of Luminaire
Total Lumen Output	1139 LM		0 - 40	970	87%
Luminaire Efficacy	76 LM/W		0 - 60	1094	98%
Maximun Candela	1919 CD		0 - 80	1112	100%

White Round Shallow (3000K, 98CRI, 42°-Clear, 15W)

Polar Plot

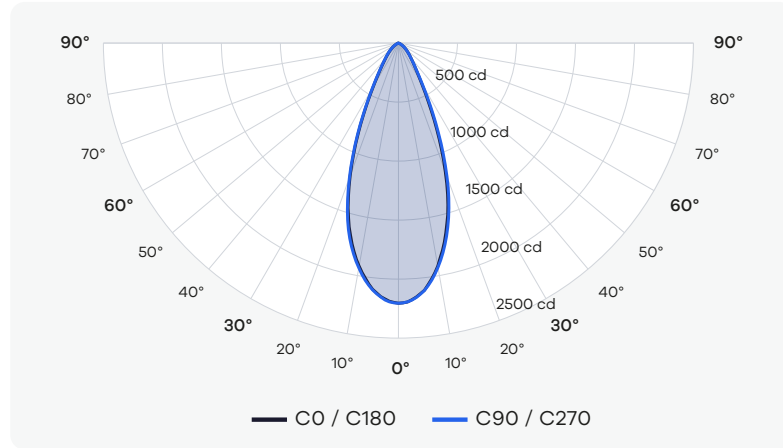

Cone of Light Tabulation

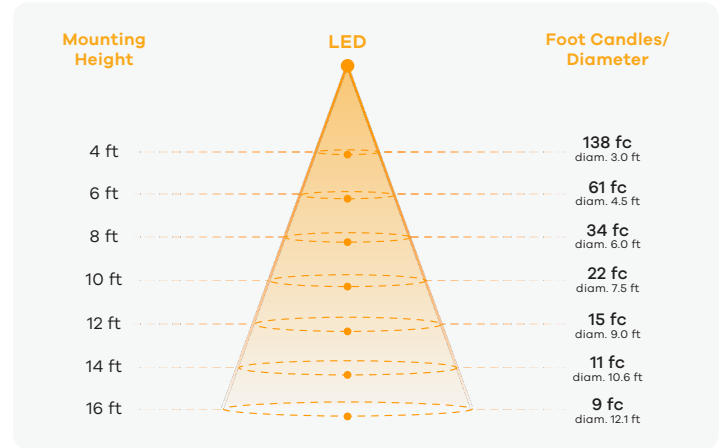

Power Information


Voltage	119.78 V
Current	0.1173 A
Power	13.8 W
Power Factor	0.9784

Summary of Results


Spacing Criteria	0 - 180: 0.38	90 - 270: 0.38	Zone	Lumens	% of Luminaire
Total Lumen Output	1309 LM		0 - 40	1114	87%
Luminaire Efficacy	98 LM/W		0 - 60	1257	98%
Maximun Candela	2205 CD		0 - 80	1277	100%

White Round Shallow (3500K, 98CRI, 42°-Clear, 15W)

Polar Plot

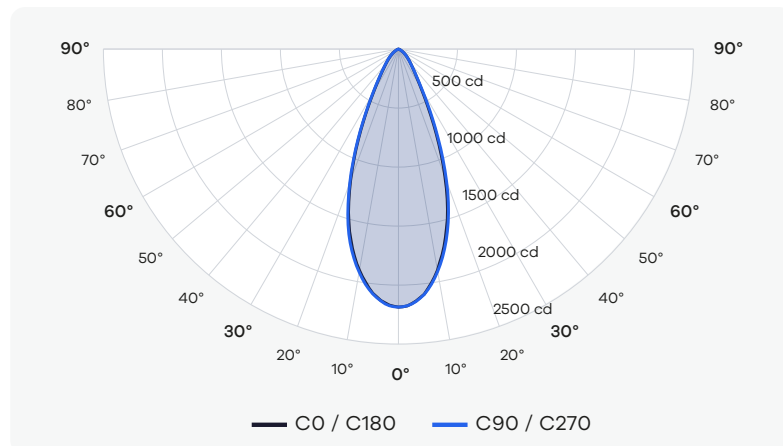

Cone of Light Tabulation

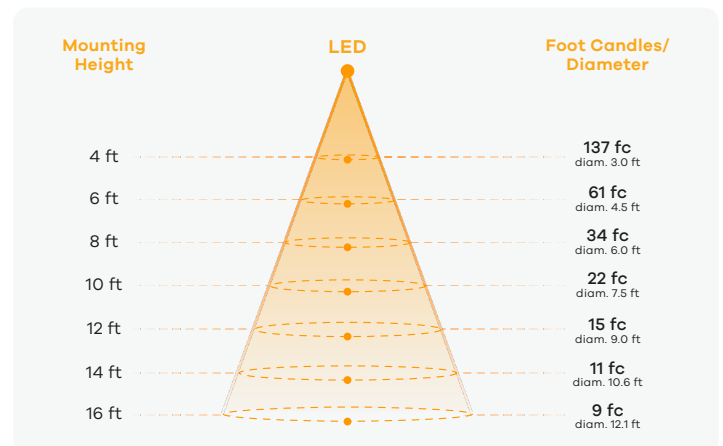

Power Information


Voltage	119.80 V
Current	0.1167 A
Power	13.7 W
Power Factor	0.9781

Summary of Results


Spacing Criteria	0 - 180: 0.38	90 - 270: 0.38	Zone	Lumens	% of Luminaire
Total Lumen Output	1298 LM		0 - 40	1105	87%
Luminaire Efficacy	87 LM/W		0 - 60	1246	98%
Maximun Candela	2187 CD		0 - 80	1266	100%

White Round Shallow (2700K, 98CRI, 53°-Clear, 15W)

Polar Plot

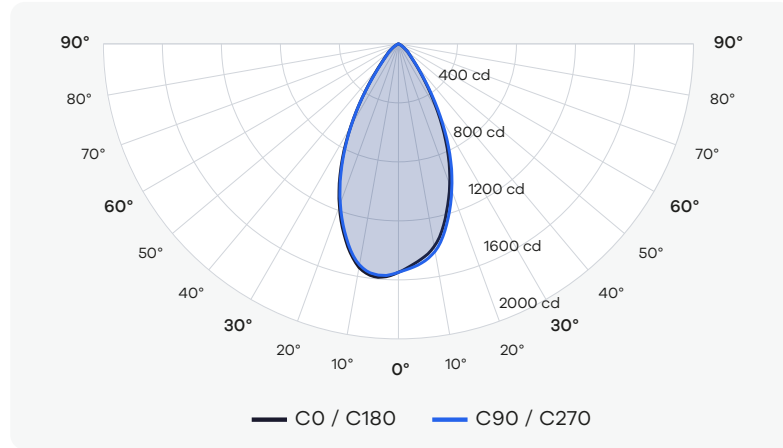

Cone of Light Tabulation

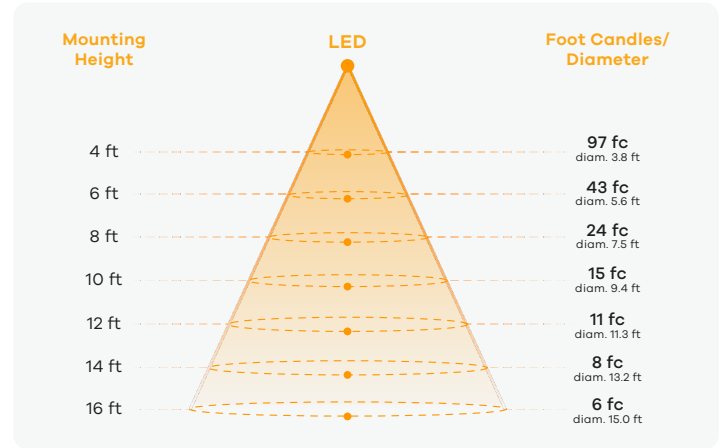

Power Information


Voltage	119.71 V
Current	0.1167 A
Power	13.7 W
Power Factor	0.9781

Summary of Results


Spacing Criteria	0 - 180: 0.47	90 - 270: 0.47	Zone	Lumens	% of Luminaire
Total Lumen Output	1277 LM		0 - 40	1038	88%
Luminaire Efficacy	85 LM/W		0 - 60	1169	99%
Maximun Candela	1549 CD		0 - 80	1182	100%

White Round Shallow (3000K, 98CRI, 53°-Clear, 15W)

Polar Plot

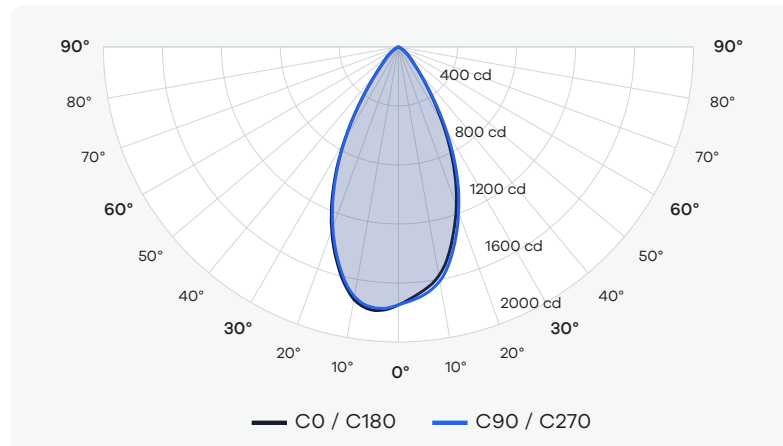

Cone of Light Tabulation

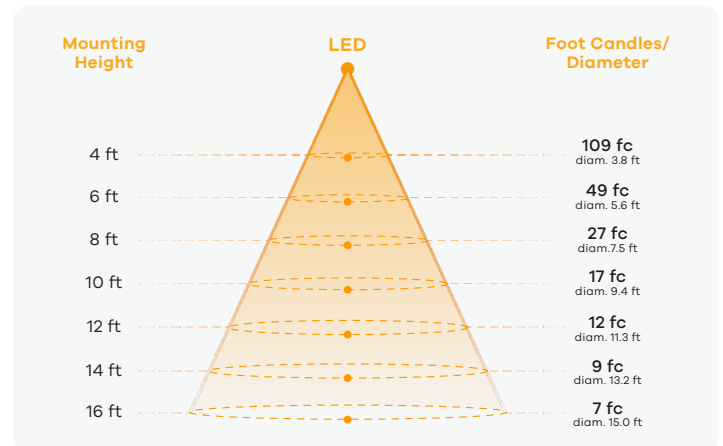

Power Information


Voltage	119.78 V
Current	0.1173 A
Power	13.8 W
Power Factor	0.9784

Summary of Results


Spacing Criteria	0 - 180: 0.47	90 - 270: 0.47	Zone	Lumens	% of Luminaire
Total Lumen Output	1442 LM		0 - 40	1172	88%
Luminaire Efficacy	108 LM/W		0 - 60	1320	99%
Maximun Candela	1749 CD		0 - 80	1334	100%

White Round Shallow (3500K, 98CRI, 53°-Clear, 15W)

Polar Plot

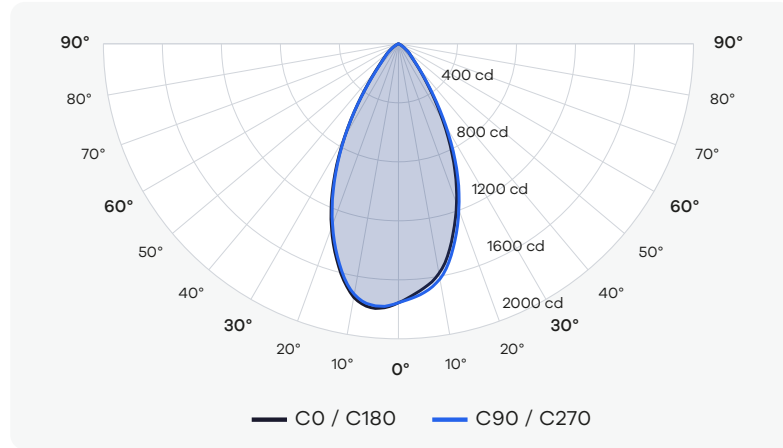

Cone of Light Tabulation

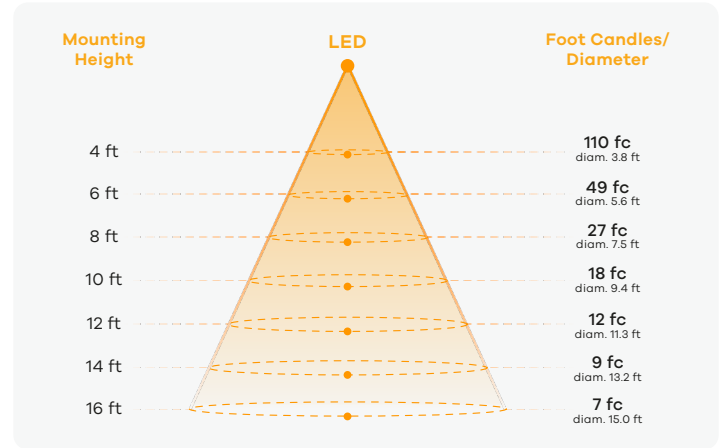

Power Information


Voltage	119.78 V
Current	0.1168 A
Power	13.7 W
Power Factor	0.9781

Summary of Results


Spacing Criteria	0 - 180: 0.47	90 - 270: 0.47	Zone	Lumens	% of Luminaire
Total Lumen Output	1448 LM		0 - 40	1177	88%
Luminaire Efficacy	97 LM/W		0 - 60	1325	99%
Maximun Candela	1755 CD		0 - 80	1339	100%

White Round Shallow (2700K, 98CRI, 34°-Silver Reflector, 15W)

Polar Plot

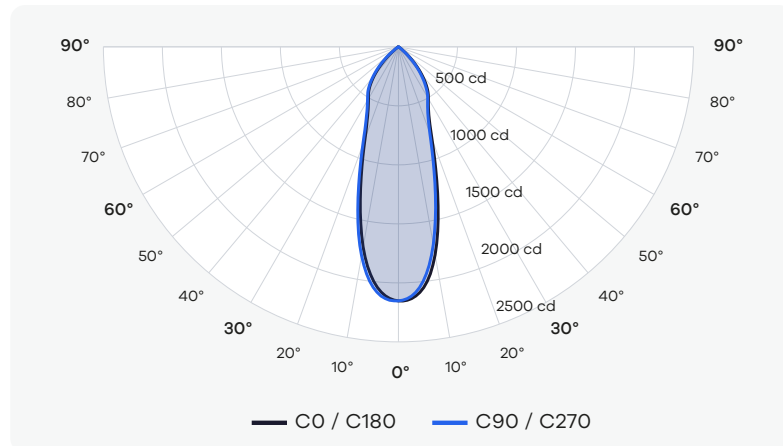

Cone of Light Tabulation

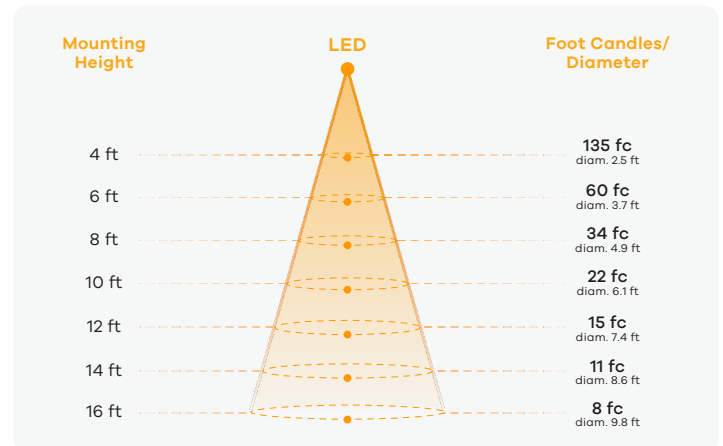

Power Information


Voltage	119.72 V
Current	0.1168 A
Power	13.7 W
Power Factor	0.9781

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	1264 LM		0 - 40	1085	86%
Luminaire Efficacy	84 LM/W		0 - 60	1251	99%
Maximun Candela	2153 CD		0 - 80	1261	100%

White Round Shallow (3000K, 98CRI, 34°-Silver Reflector, 15W)

Polar Plot

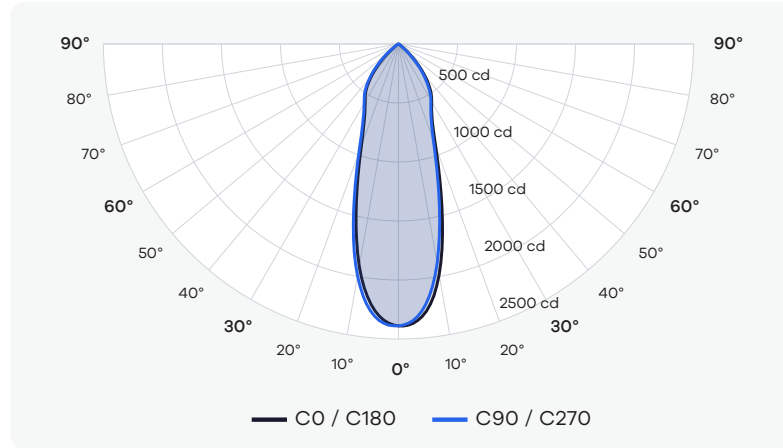

Cone of Light Tabulation

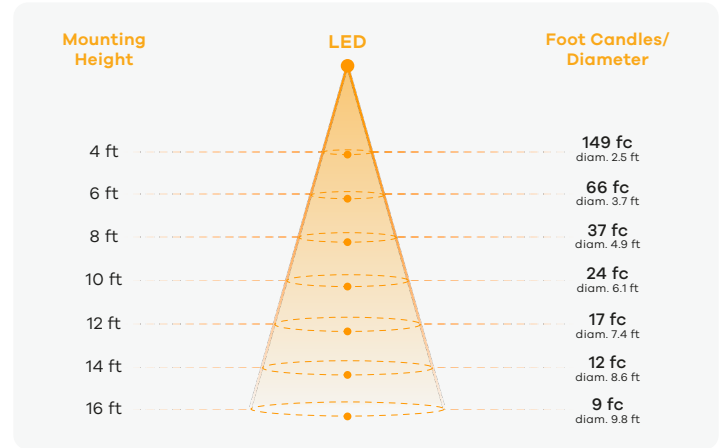

Power Information


Voltage	119.79 V
Current	0.1172 A
Power	13.7 W
Power Factor	0.9785

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	1402 LM		0 - 40	1204	86%
Luminaire Efficacy	105 LM/W		0 - 60	1389	99%
Maximun Candela	2389 CD		0 - 80	1399	100%

White Round Shallow (3500K, 98CRI, 34°-Silver Reflector, 15W)

Polar Plot

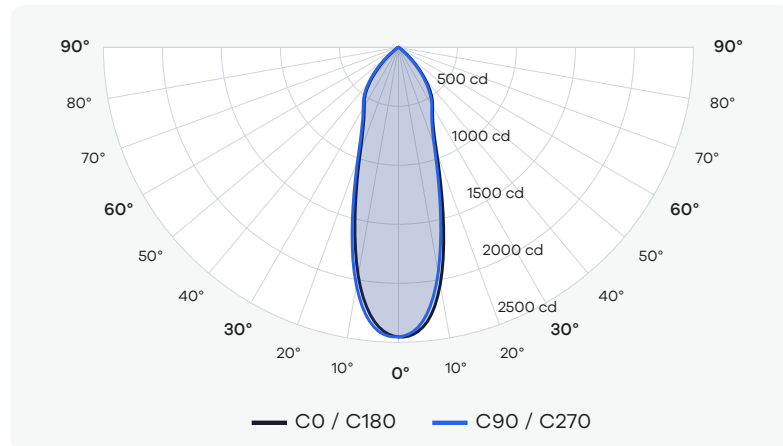

Cone of Light Tabulation

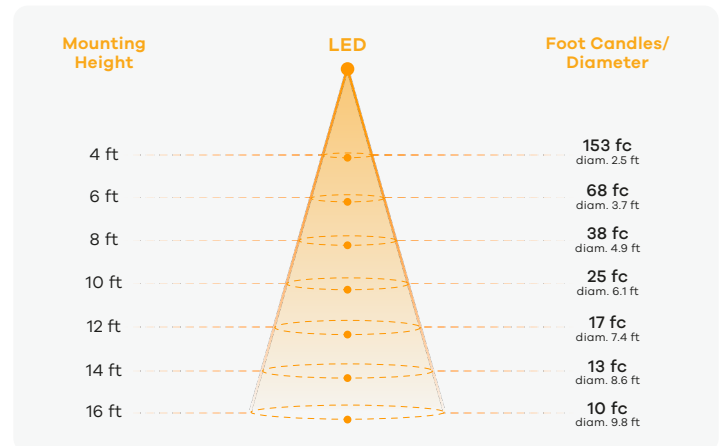

Power Information


Voltage	119.79 V
Current	0.1167 A
Power	13.7 W
Power Factor	0.9781

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	1441 LM		0 - 40	1237	86%
Luminaire Efficacy	96 LM/W		0 - 60	1427	99%
Maximun Candela	2454 CD		0 - 80	1437	100%

White Round Shallow (2700K, 98CRI, 54°-Silver Reflector, 15W)

Polar Plot

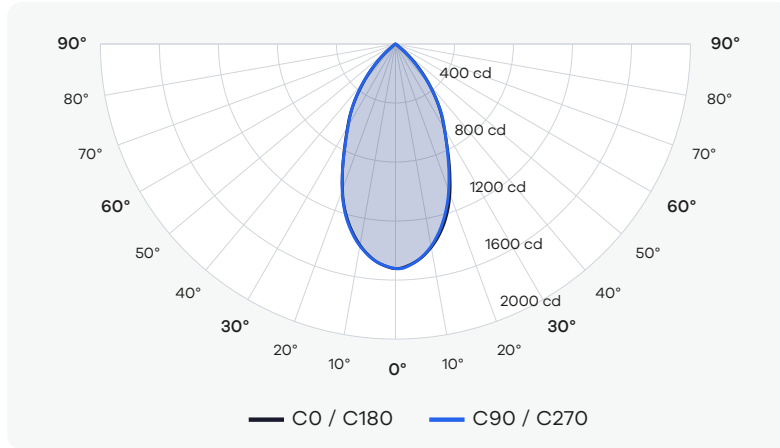

Cone of Light Tabulation

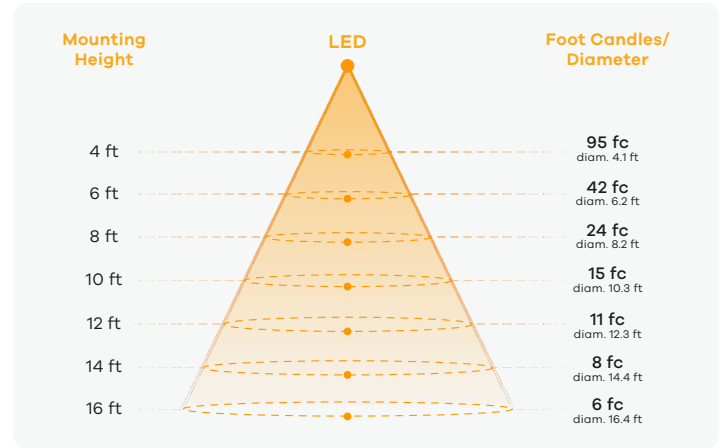

Power Information


Voltage	119.80 V
Current	0.1173 A
Power	13.7 W
Power Factor	0.9781

Summary of Results


Spacing Criteria	0 - 180: 0.51	90 - 270: 0.51	Zone	Lumens	% of Luminaire
Total Lumen Output	1360 LM		0 - 40	1198	86%
Luminaire Efficacy	101 LM/W		0 - 60	1382	100%
Maximun Candela	1522 CD		0 - 80	1387	100%

White Round Shallow (3000K, 98CRI, 54°-Silver Reflector, 15W)

Polar Plot

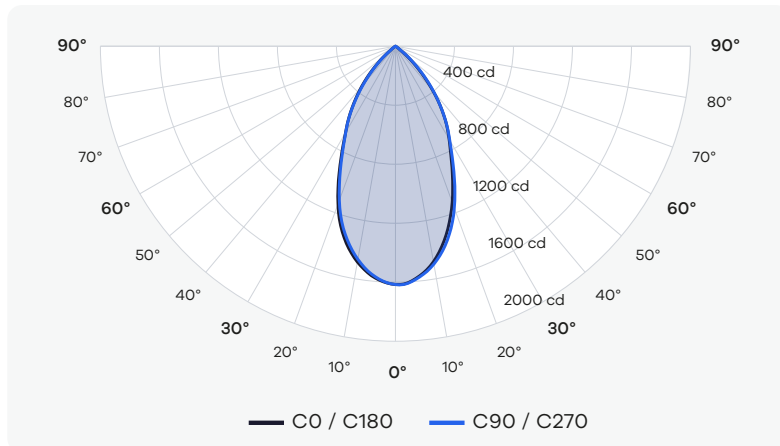

Cone of Light Tabulation

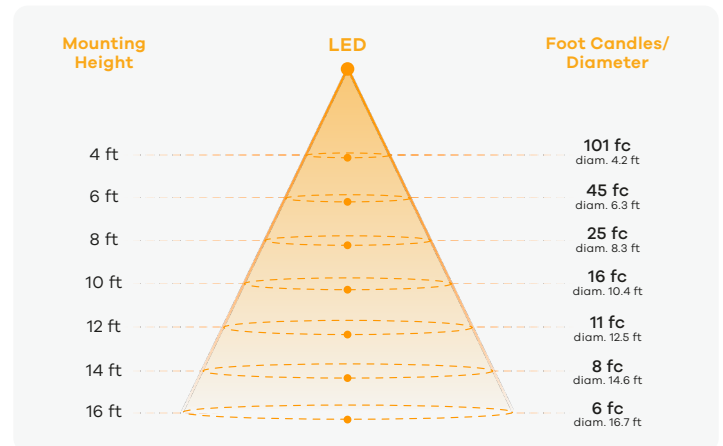

Power Information


Voltage	119.80 V
Current	0.1173 A
Power	13.7 W
Power Factor	0.9781

Summary of Results


Spacing Criteria	0 - 180: 0.52	90 - 270: 0.52	Zone	Lumens	% of Luminaire
Total Lumen Output	1461 LM		0 - 40	1286	86%
Luminaire Efficacy	109 LM/W		0 - 60	1488	99%
Maximun Candela	1616 CD		0 - 80	1495	100%

White Round Shallow (3500K, 98CRI, 54°-Silver Reflector, 15W)

Polar Plot

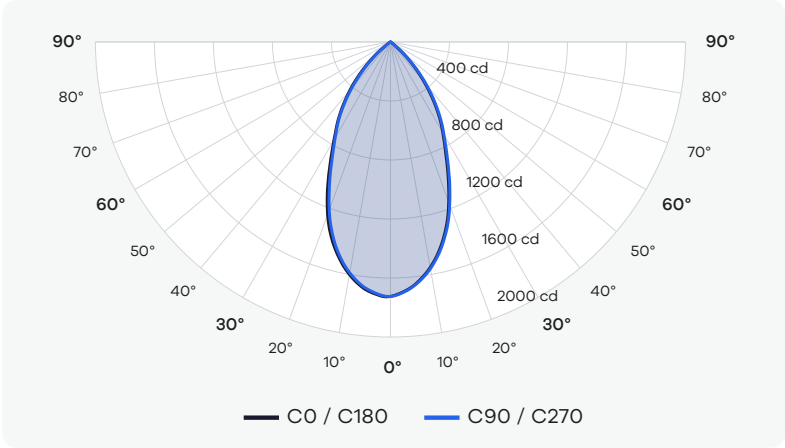

Cone of Light Tabulation

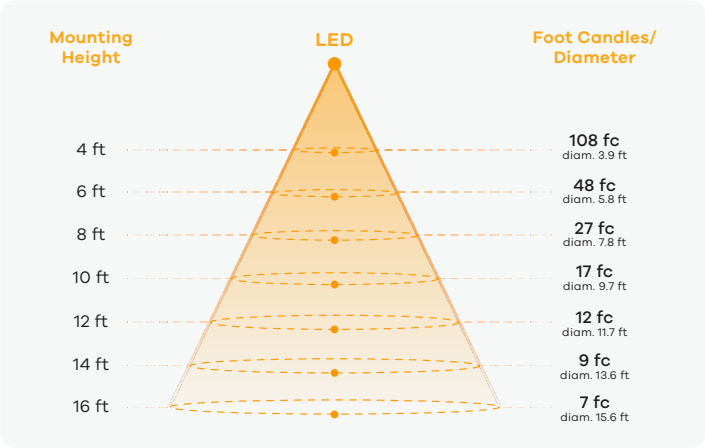

Power Information

Voltage	119.80 V
Current	0.1173 A
Power	13.7 W
Power Factor	0.9781

Summary of Results

Spacing Criteria	0 - 180: 0.49	90 - 270: 0.49	Zone	Lumens	% of Luminaire
Total Lumen Output	1541 LM		0 - 40	1289	88%
Luminaire Efficacy	115 LM/W		0 - 60	1463	100%
Maximun Candela	1725 CD		0 - 80	1469	100%