



White Round Shallow (2700K, 98CRI, 35°-Clear, 28W)

Polar Plot

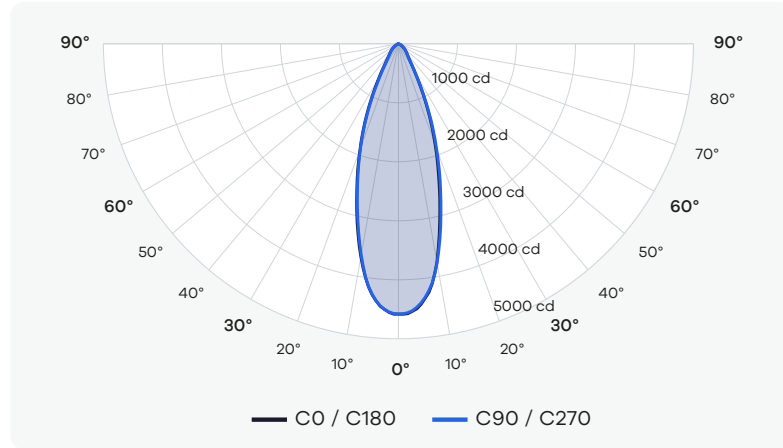

Cone of Light Tabulation

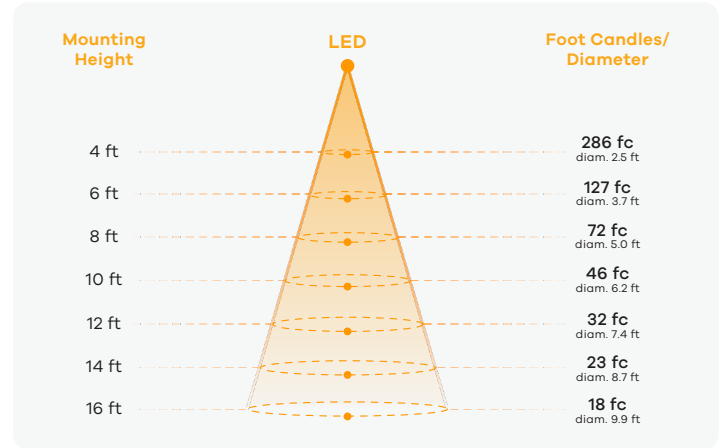

Power Information


Voltage	119.67 V
Current	0.2306 A
Power	27.1 W
Power Factor	0.9816

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	2139 LM		0 - 40	1860	88%
Luminaire Efficacy	76 LM/W		0 - 60	2080	98%
Maximun Candela	4581 CD		0 - 80	2115	100%

White Round Shallow (3000K, 98CRI, 35°-Clear, 28W)

Polar Plot

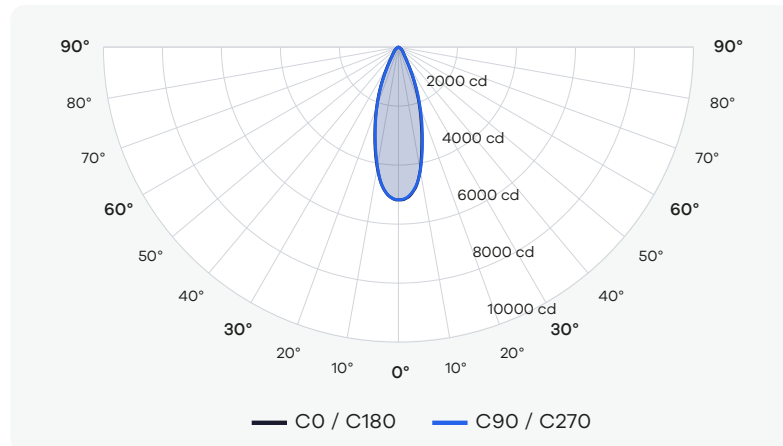

Cone of Light Tabulation

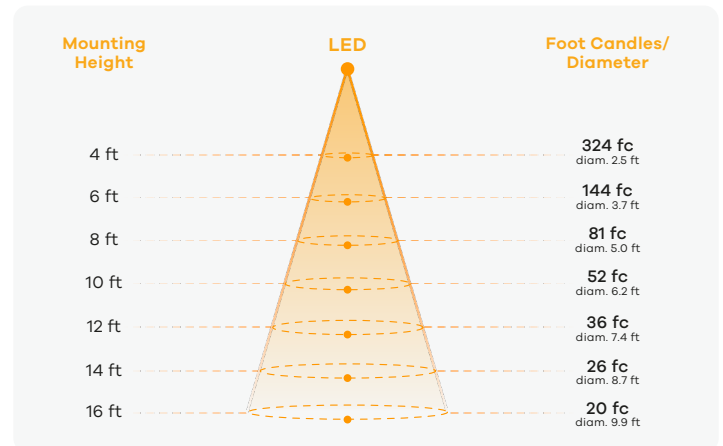

Power Information


Voltage	119.68 V
Current	0.2344 A
Power	27.6 W
Power Factor	0.9821

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	2416 LM		0 - 40	2102	88%
Luminaire Efficacy	91 LM/W		0 - 60	2351	98%
Maximun Candela	5177 CD		0 - 80	2390	100%

White Round Shallow (3500K, 98CRI, 35°-Clear, 28W)

Polar Plot

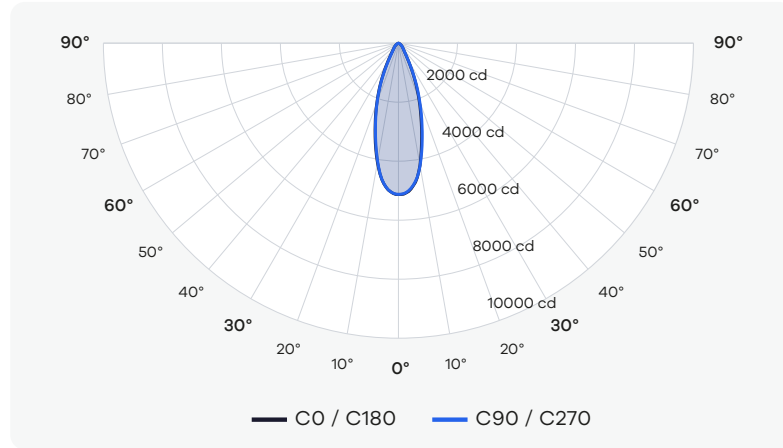

Cone of Light Tabulation

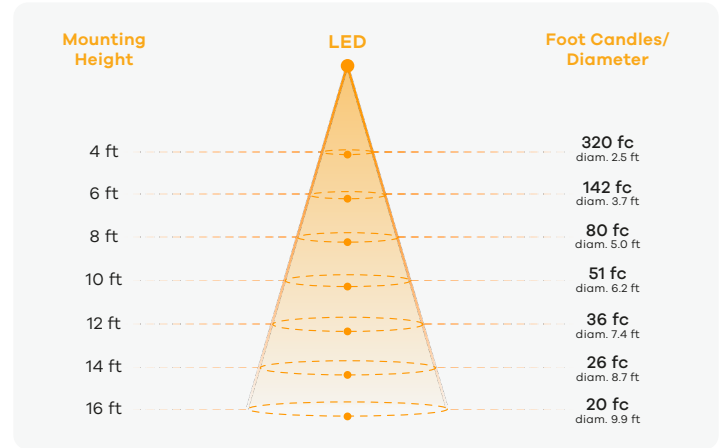

Power Information


Voltage	119.71 V
Current	0.2307 A
Power	27.1 W
Power Factor	0.9818

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	2393 LM		0 - 40	2082	88%
Luminaire Efficacy	85 LM/W		0 - 60	2328	98%
Maximun Candela	5126 CD		0 - 80	2367	100%

White Round Shallow (2700K, 98CRI, 42°-Clear, 28W)

Polar Plot

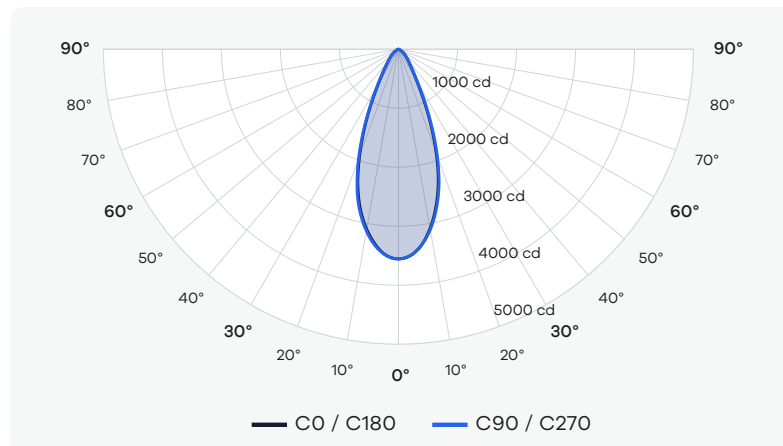

Cone of Light Tabulation

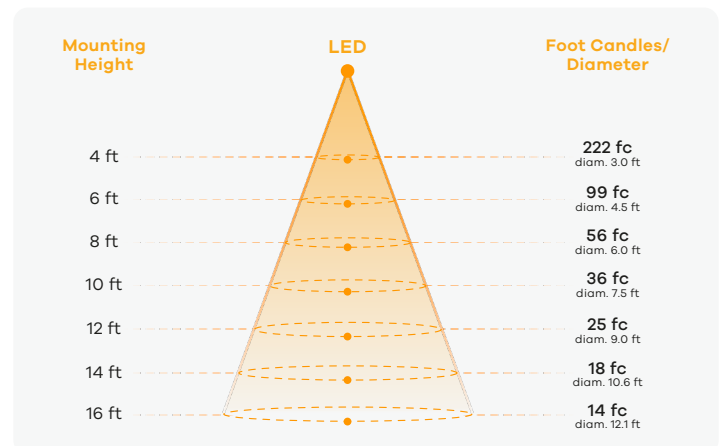

Power Information


Voltage	119.70 V
Current	0.2301 A
Power	27.0 W
Power Factor	0.9815

Summary of Results


Spacing Criteria	0 - 180: 0.38	90 - 270: 0.38	Zone	Lumens	% of Luminaire
Total Lumen Output	2107 LM		0 - 40	1794	87%
Luminaire Efficacy	75 LM/W		0 - 60	2023	98%
Maximun Candela	3554 CD		0 - 80	2055	100%

White Round Shallow (3000K, 98CRI, 42°-Clear, 28W)

Polar Plot

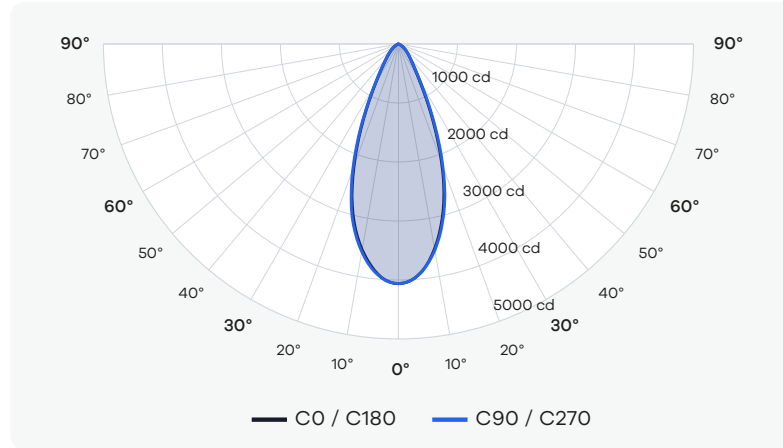

Cone of Light Tabulation

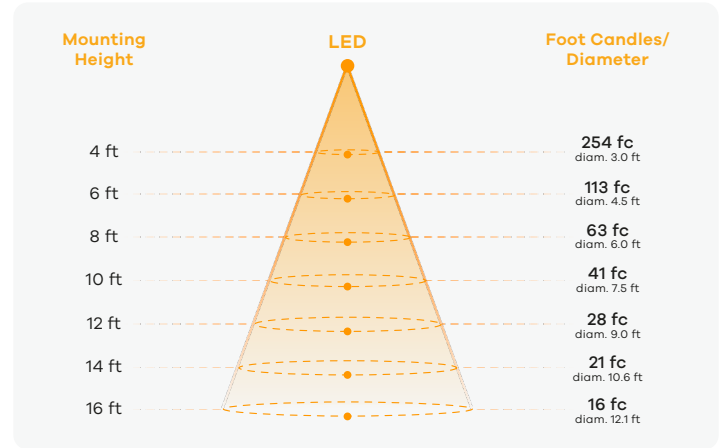

Power Information


Voltage	119.69 V
Current	0.2339 A
Power	27.5 W
Power Factor	0.9821

Summary of Results


Spacing Criteria	0 - 180: 0.38	90 - 270: 0.38	Zone	Lumens	% of Luminaire
Total Lumen Output	2408 LM		0 - 40	2050	87%
Luminaire Efficacy	91 LM/W		0 - 60	2311	98%
Maximun Candela	4062 CD		0 - 80	2348	100%

White Round Shallow (3500K, 98CRI, 42°-Clear, 28W)

Polar Plot

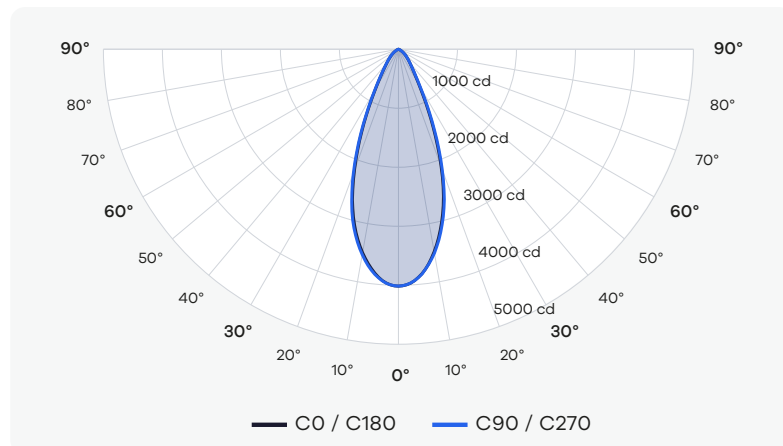

Cone of Light Tabulation

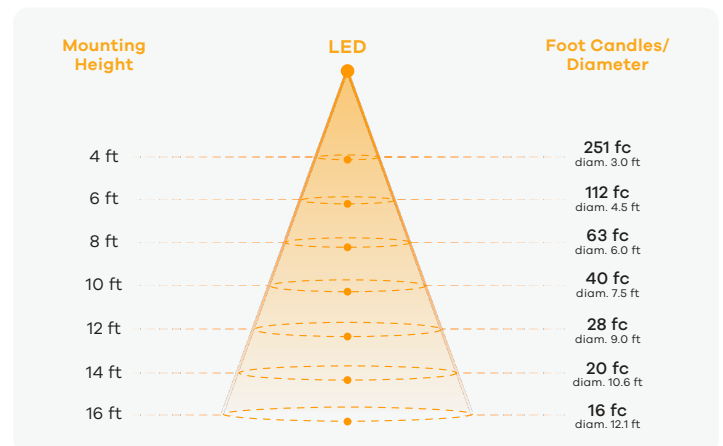

Power Information


Voltage	119.71 V
Current	0.2305 A
Power	27.1 W
Power Factor	0.9817

Summary of Results


Spacing Criteria	0 - 180: 0.38	90 - 270: 0.38	Zone	Lumens	% of Luminaire
Total Lumen Output	2380 LM		0 - 40	2026	87%
Luminaire Efficacy	85 LM/W		0 - 60	2284	98%
Maximun Candela	4015 CD		0 - 80	2321	100%

White Round Shallow (2700K, 98CRI, 53°-Clear, 28W)

Polar Plot

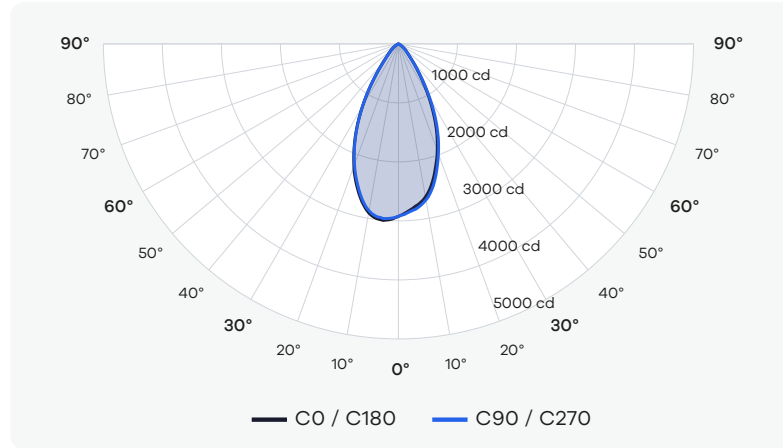

Cone of Light Tabulation

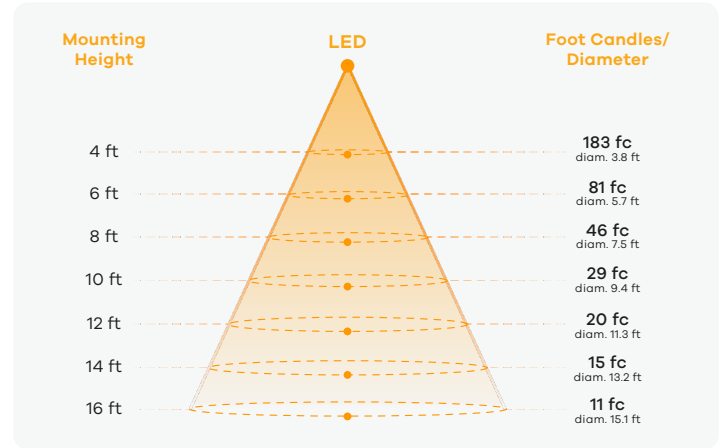

Power Information


Voltage	119.69 V
Current	0.2299 A
Power	27.0 W
Power Factor	0.9815

Summary of Results


Spacing Criteria	0 - 180: 0.47	90 - 270: 0.47	Zone	Lumens	% of Luminaire
Total Lumen Output	2404 LM		0 - 40	1967	88%
Luminaire Efficacy	86 LM/W		0 - 60	2213	99%
Maximun Candela	2924 CD		0 - 80	2237	100%

White Round Shallow (3000K, 98CRI, 53°-Clear, 28W)

Polar Plot

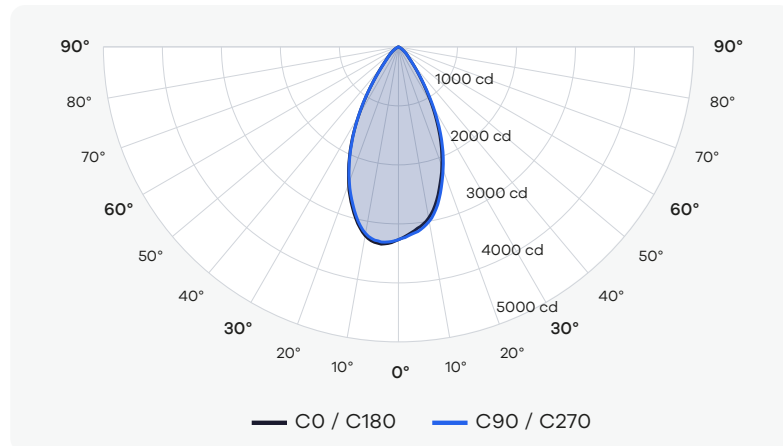

Cone of Light Tabulation

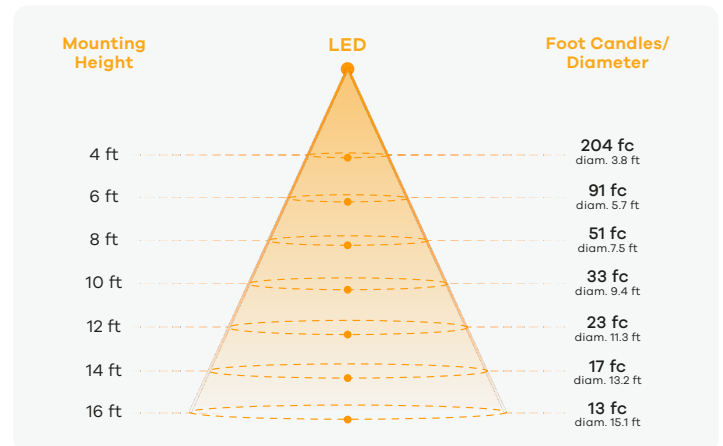

Power Information


Voltage	119.70 V
Current	0.2337 A
Power	27.5 W
Power Factor	0.9821

Summary of Results


Spacing Criteria	0 - 180: 0.47	90 - 270: 0.47	Zone	Lumens	% of Luminaire
Total Lumen Output	2687 LM		0 - 40	2198	88%
Luminaire Efficacy	101 LM/W		0 - 60	2473	99%
Maximun Candela	3268 CD		0 - 80	2500	100%

White Round Shallow (3500K, 98CRI, 53°-Clear, 28W)

Polar Plot

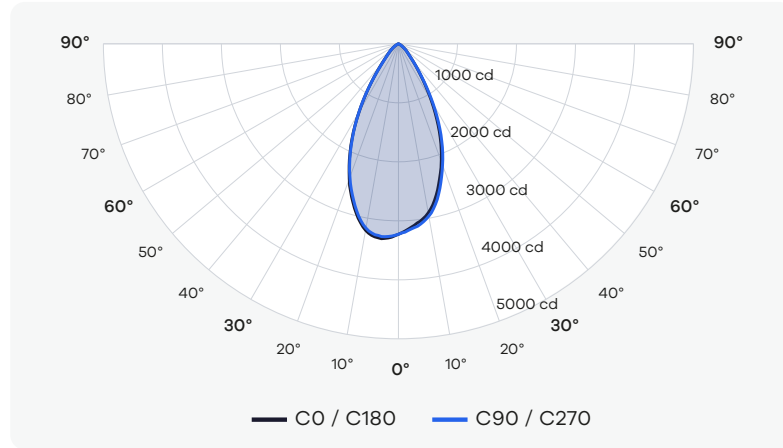

Cone of Light Tabulation

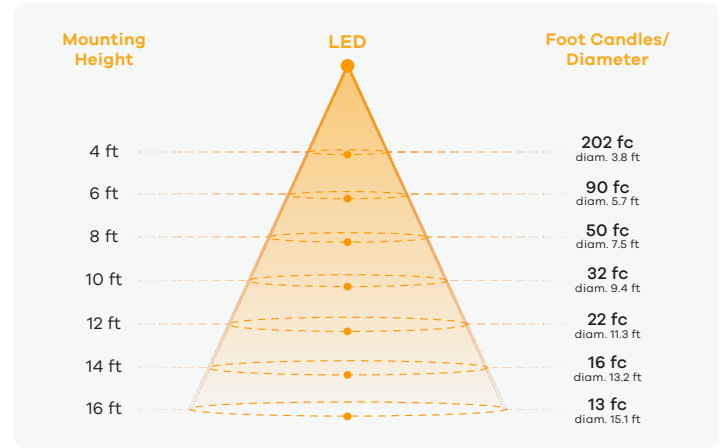

Power Information


Voltage	119.71 V
Current	0.2302 A
Power	27.1 W
Power Factor	0.9817

Summary of Results


Spacing Criteria	0 - 180: 0.47	90 - 270: 0.47	Zone	Lumens	% of Luminaire
Total Lumen Output	2654 LM		0 - 40	2171	88%
Luminaire Efficacy	95 LM/W		0 - 60	2443	99%
Maximun Candela	3228 CD		0 - 80	2470	100%

White Round Shallow (2700K, 98CRI, 34°-Silver Reflector, 28W)

Polar Plot

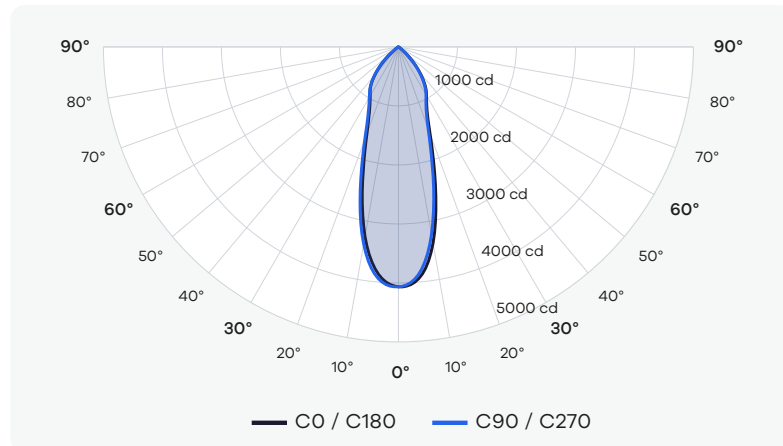

Cone of Light Tabulation

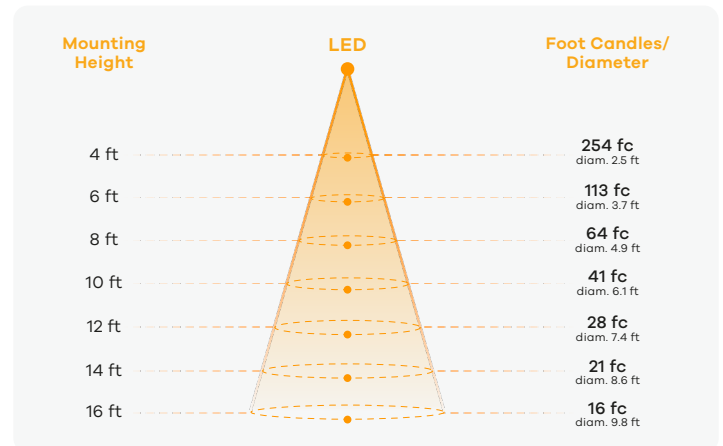

Power Information


Voltage	119.68 V
Current	0.2297 A
Power	27.0 W
Power Factor	0.9815

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	2387 LM		0 - 40	2037	87%
Luminaire Efficacy	85 LM/W		0 - 60	2336	99%
Maximun Candela	4065 CD		0 - 80	2353	100%

White Round Shallow (3000K, 98CRI, 34°-Silver Reflector, 28W)

Polar Plot

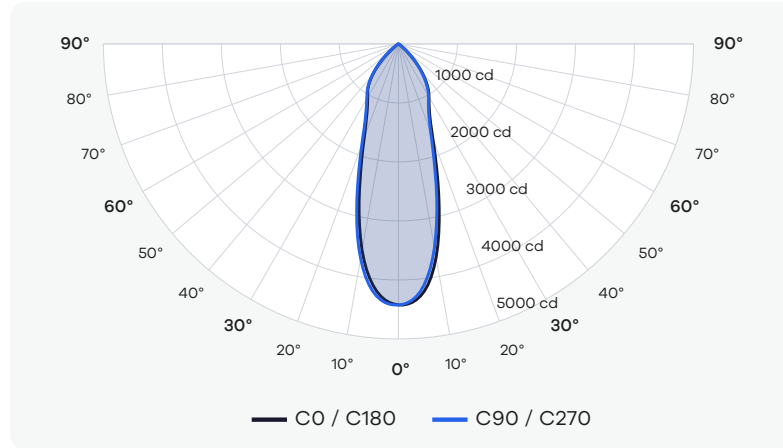

Cone of Light Tabulation

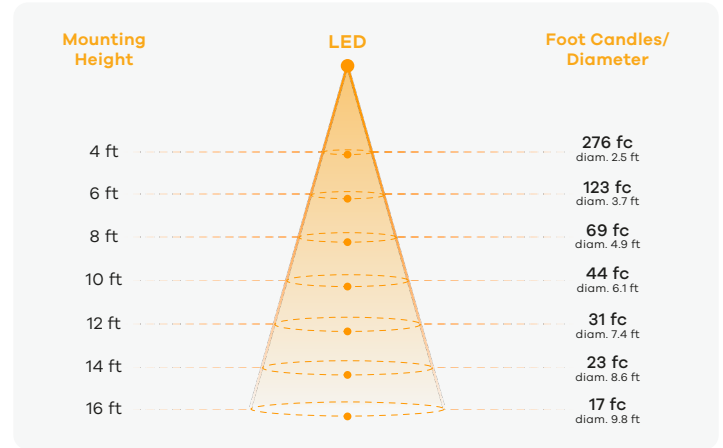

Power Information


Voltage	119.69 V
Current	0.2335 A
Power	27.4 W
Power Factor	0.9821

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	2597 LM		0 - 40	2217	87%
Luminaire Efficacy	97 LM/W		0 - 60	2541	99%
Maximun Candela	4424 CD		0 - 80	2560	100%

White Round Shallow (3500K, 98CRI, 34°-Silver Reflector, 28W)

Polar Plot

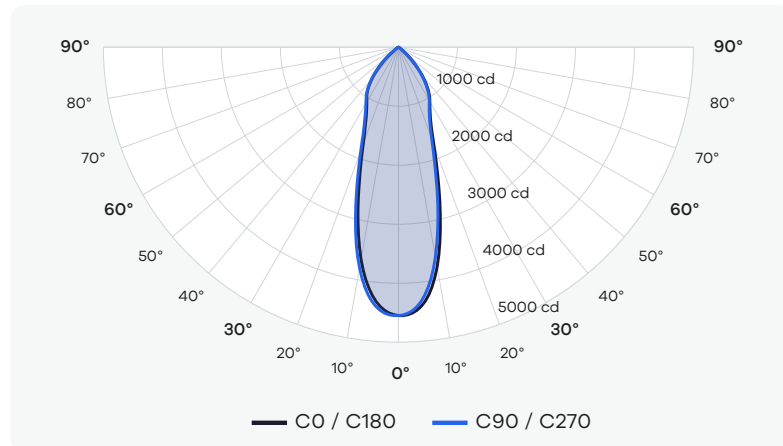

Cone of Light Tabulation

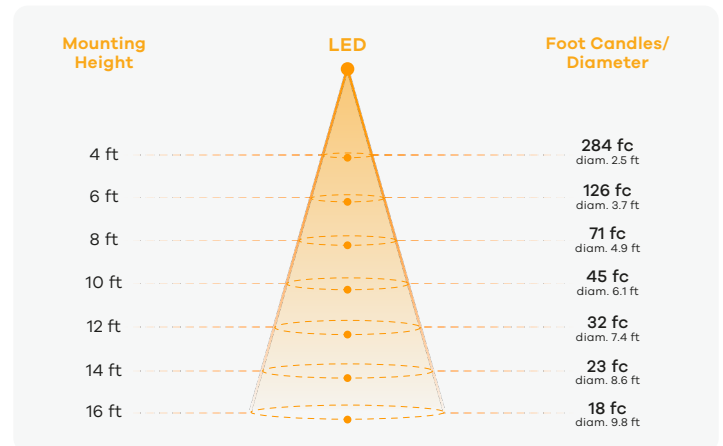

Power Information


Voltage	119.71 V
Current	0.2300 A
Power	27.0 W
Power Factor	0.9817

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	2670 LM		0 - 40	2279	87%
Luminaire Efficacy	95 LM/W		0 - 60	2613	99%
Maximun Candela	4548 CD		0 - 80	2632	100%

White Round Shallow (2700K, 98CRI, 54°-Silver Reflector, 28W)

Polar Plot

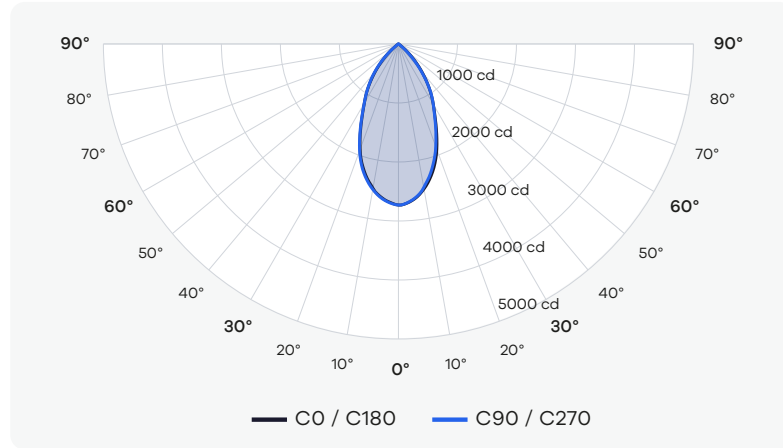

Cone of Light Tabulation

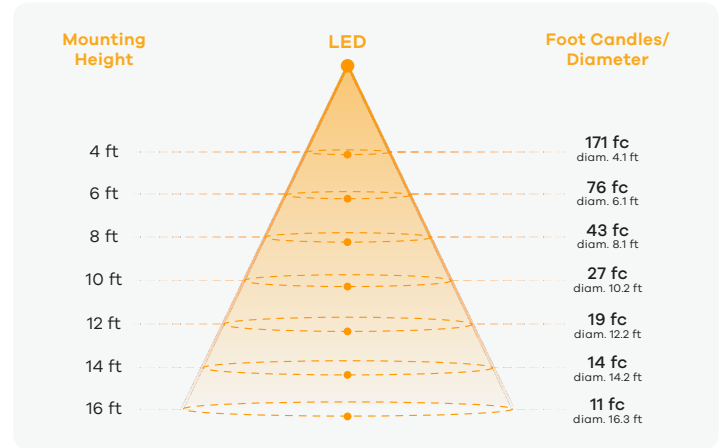

Power Information


Voltage	119.71 V
Current	0.2334 A
Power	27.4 W
Power Factor	0.9821

Summary of Results


Spacing Criteria	0 - 180: 0.51	90 - 270: 0.51	Zone	Lumens	% of Luminaire
Total Lumen Output	2431 LM		0 - 40	2122	87%
Luminaire Efficacy	92 LM/W		0 - 60	2442	100%
Maximun Candela	2730 CD		0 - 80	2452	100%

White Round Shallow (3000K, 98CRI, 54°-Silver Reflector, 28W)

Polar Plot

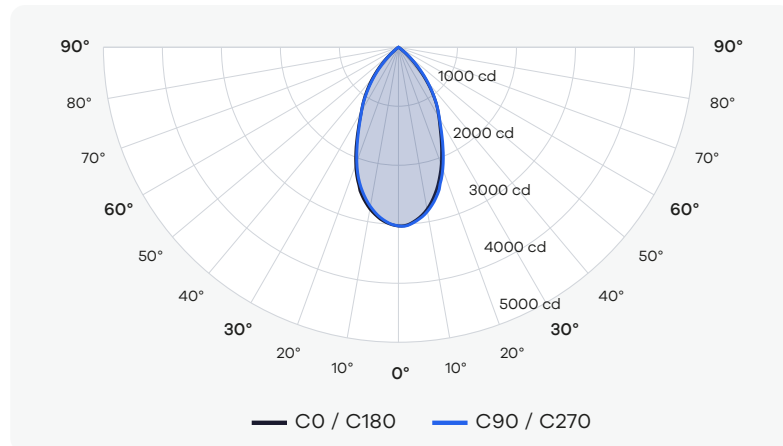

Cone of Light Tabulation

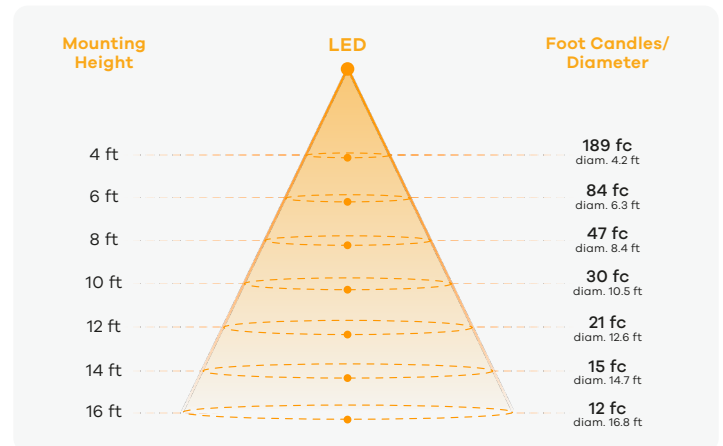

Power Information


Voltage	119.71 V
Current	0.2334 A
Power	27.4 W
Power Factor	0.9821

Summary of Results


Spacing Criteria	0 - 180: 0.52	90 - 270: 0.52	Zone	Lumens	% of Luminaire
Total Lumen Output	2735 LM		0 - 40	2419	86%
Luminaire Efficacy	103 LM/W		0 - 60	2788	100%
Maximun Candela	3029 CD		0 - 80	2801	100%

White Round Shallow (3500K, 98CRI, 54°-Silver Reflector, 28W)

Polar Plot

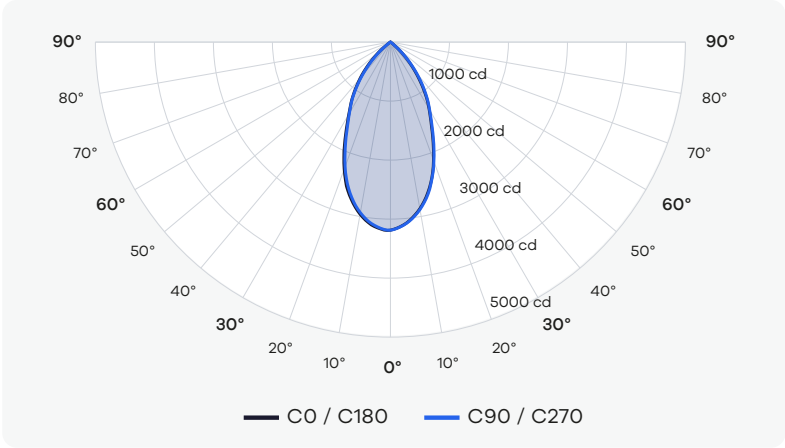

Cone of Light Tabulation

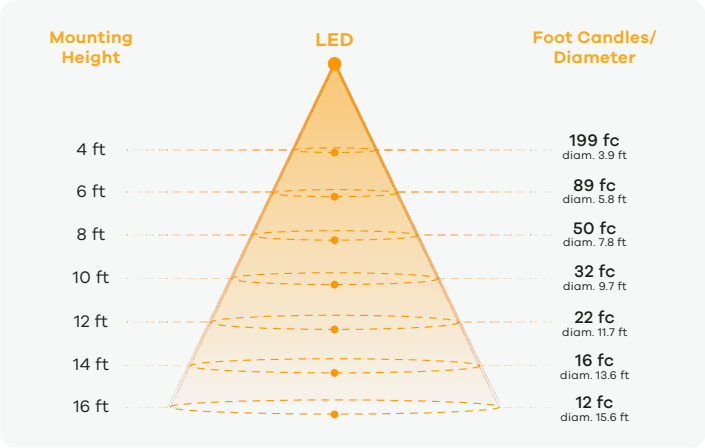

Power Information

Voltage	119.71 V
Current	0.2334 A
Power	27.4 W
Power Factor	0.9821

Summary of Results

Spacing Criteria	0 - 180: 0.49	90 - 270: 0.49	Zone	Lumens	% of Luminaire
Total Lumen Output	2844 LM		0 - 40	2375	88%
Luminaire Efficacy	107 LM/W		0 - 60	2690	100%
Maximun Candela	3188 CD		0 - 80	2700	100%