



White Flanged Trim (2700K, 98CRI, 34°-Clear, 12W)

Polar Plot

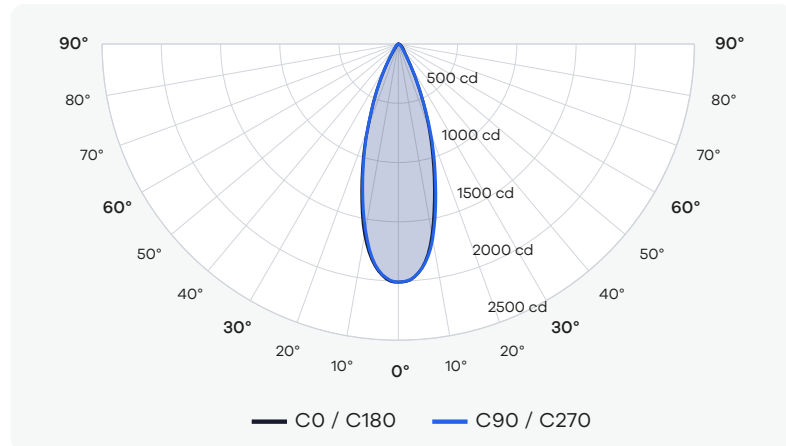

Cone of Light Tabulation

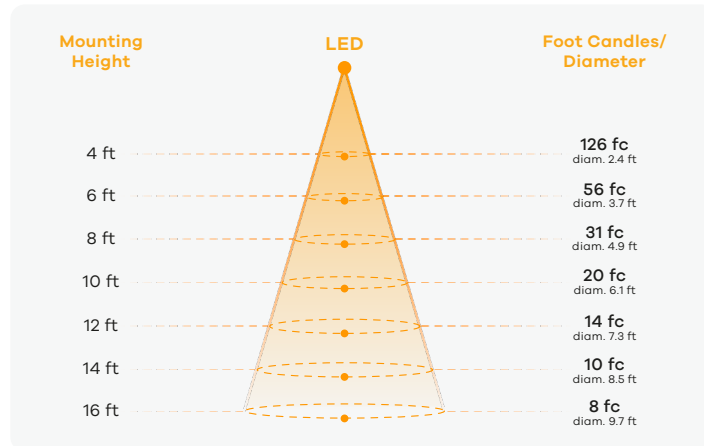

Power Information


Voltage	119.84 V
Current	0.08936 A
Power	10.5 W
Power Factor	0.9776

Summary of Results


Spacing Criteria	0 - 180: 0.3	90 - 270: 0.3	Zone	Lumens	% of Luminaire
Total Lumen Output	826 LM		0 - 40	763	86%
Luminaire Efficacy	69 LM/W		0 - 60	840	95%
Maximun Candela	2009 CD		0 - 80	877	99%

White Flanged Trim (3000K, 98CRI, 34°-Clear, 12W)

Polar Plot

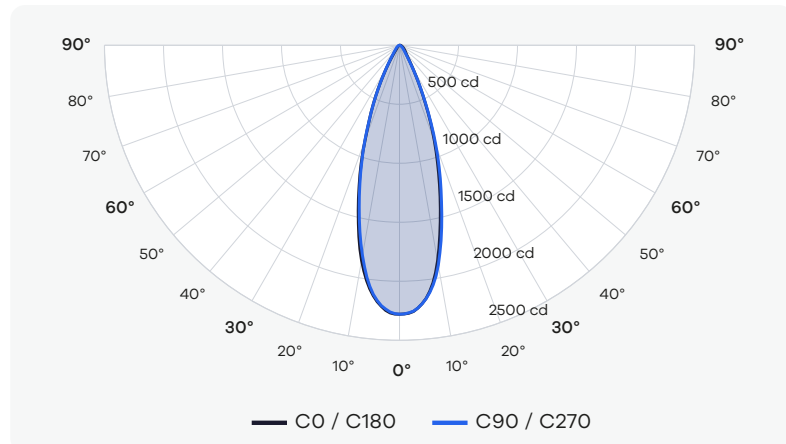

Cone of Light Tabulation

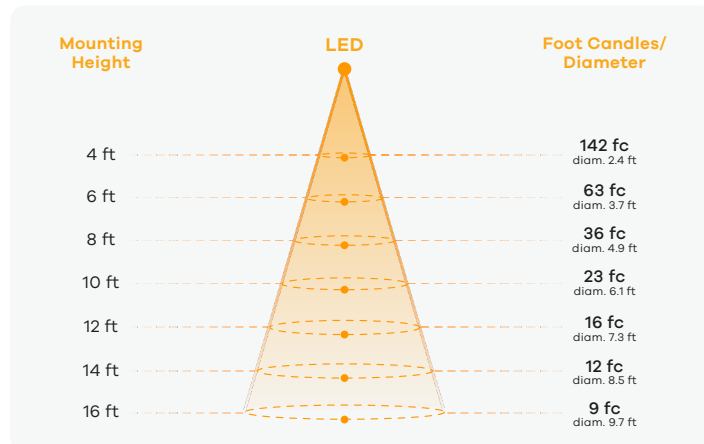

Power Information


Voltage	119.82 V
Current	0.08972 A
Power	10.5 W
Power Factor	0.9779

Summary of Results


Spacing Criteria	0 - 180: 0.3	90 - 270: 0.3	Zone	Lumens	% of Luminaire
Total Lumen Output	938 LM		0 - 40	865	86%
Luminaire Efficacy	91 LM/W		0 - 60	953	95%
Maximun Candela	2279 CD		0 - 80	995	99%

White Flanged Trim (3500K, 98CRI, 34°-Clear, 12W)

Polar Plot

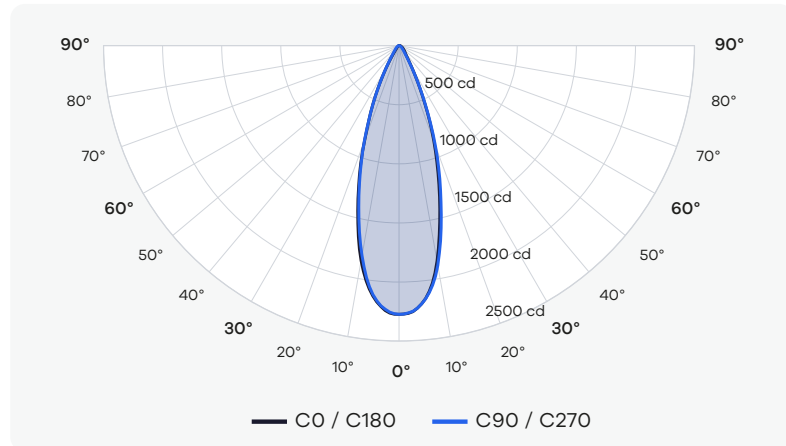

Cone of Light Tabulation

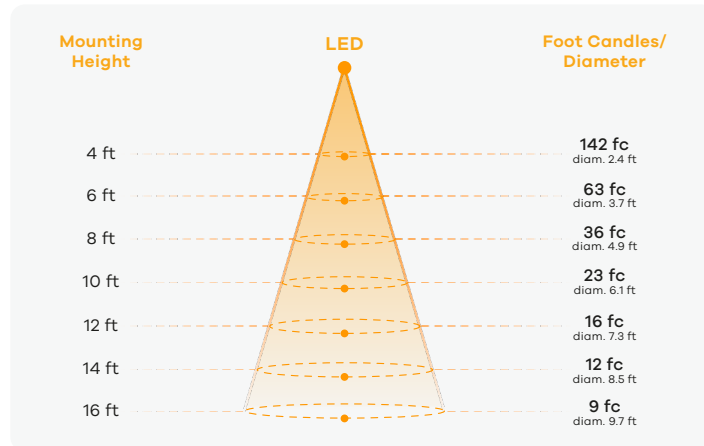

Power Information


Voltage	119.83 V
Current	0.08936 A
Power	10.5 W
Power Factor	0.9778

Summary of Results


Spacing Criteria	0 - 180: 0.3	90 - 270: 0.3	Zone	Lumens	% of Luminaire
Total Lumen Output	935 LM		0 - 40	863	86%
Luminaire Efficacy	78 LM/W		0 - 60	950	95%
Maximun Candela	2273 CD		0 - 80	992	99%

White Flanged Trim (2700K, 98CRI, 40°-Clear, 12W)

Polar Plot

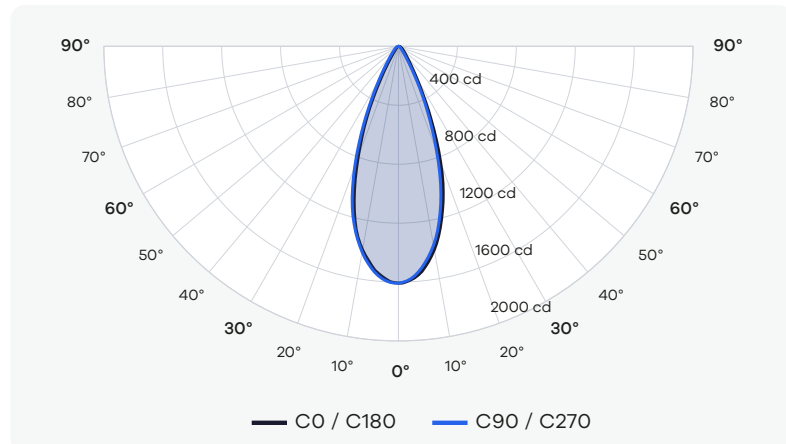

Cone of Light Tabulation

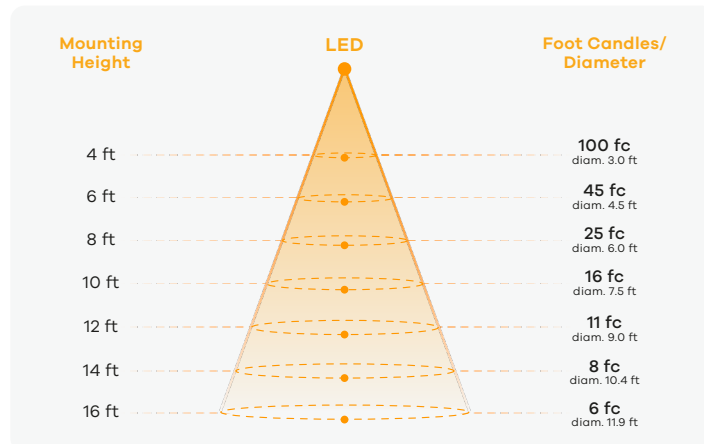

Power Information


Voltage	119.72 V
Current	0.08974 A
Power	10.5 W
Power Factor	0.9776

Summary of Results


Spacing Criteria	0 - 180: 0.37	90 - 270: 0.37	Zone	Lumens	% of Luminaire
Total Lumen Output	822 LM		0 - 40	772	86%
Luminaire Efficacy	69 LM/W		0 - 60	849	95%
Maximun Candela	1607 CD		0 - 80	886	99%

White Flanged Trim (3000K, 98CRI, 40°-Clear, 12W)

Polar Plot

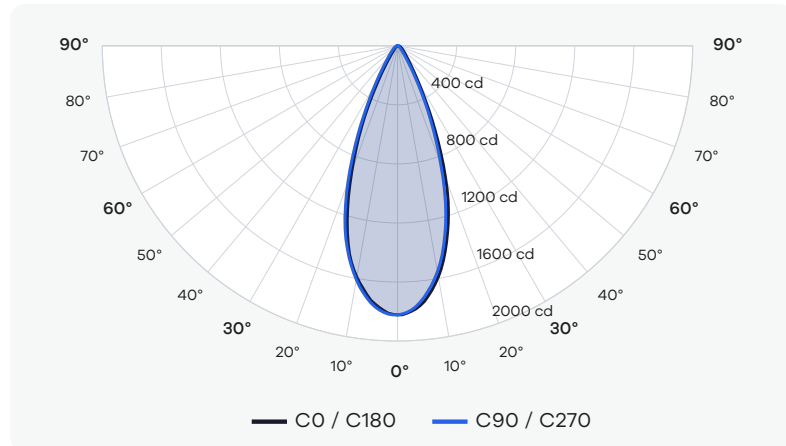

Cone of Light Tabulation

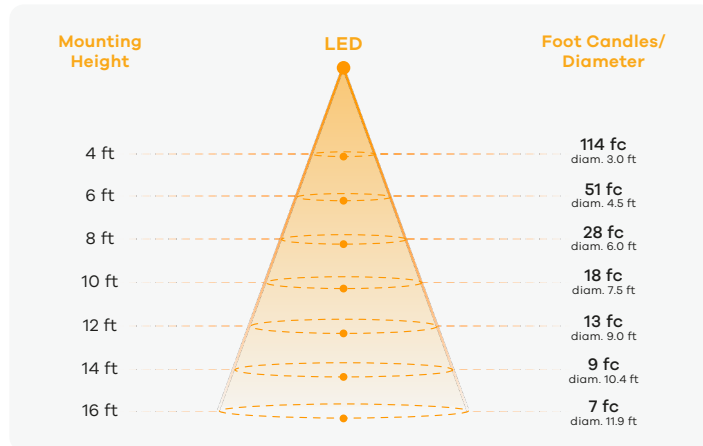

Power Information


Voltage	119.82 V
Current	0.08961 A
Power	10.5 W
Power Factor	0.9779

Summary of Results


Spacing Criteria	0 - 180: 0.37	90 - 270: 0.37	Zone	Lumens	% of Luminaire
Total Lumen Output	932 LM		0 - 40	875	86%
Luminaire Efficacy	90 LM/W		0 - 60	963	95%
Maximun Candela	1823 CD		0 - 80	1005	99%

White Flanged Trim (3500K, 98CRI, 40°-Clear, 12W)

Polar Plot

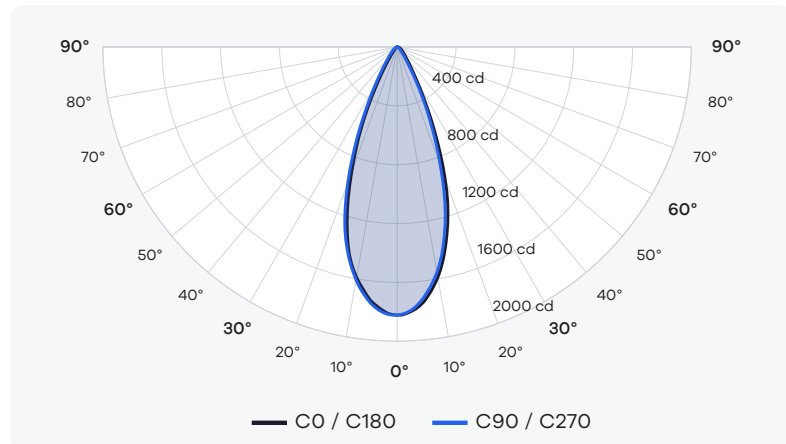

Cone of Light Tabulation

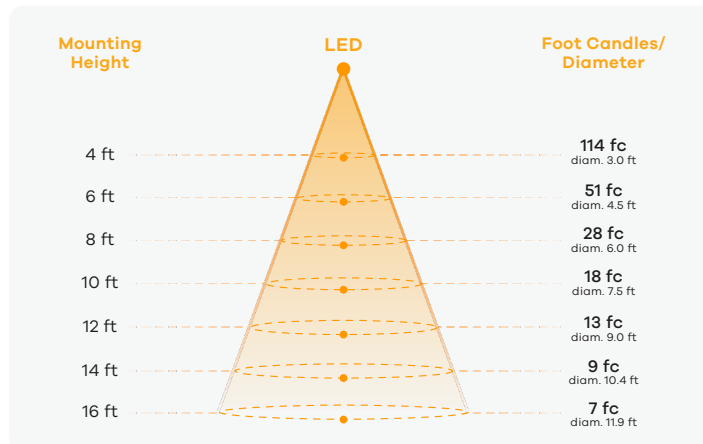

Power Information


Voltage	119.83 V
Current	0.08927 A
Power	10.5 W
Power Factor	0.9778

Summary of Results


Spacing Criteria	0 - 180: 0.37	90 - 270: 0.37	Zone	Lumens	% of Luminaire
Total Lumen Output	932 LM		0 - 40	875	86%
Luminaire Efficacy	78 LM/W		0 - 60	963	95%
Maximun Candela	1823 CD		0 - 80	1005	99%

White Flanged Trim (2700K, 98CRI, 49°-Clear, 12W)

Polar Plot

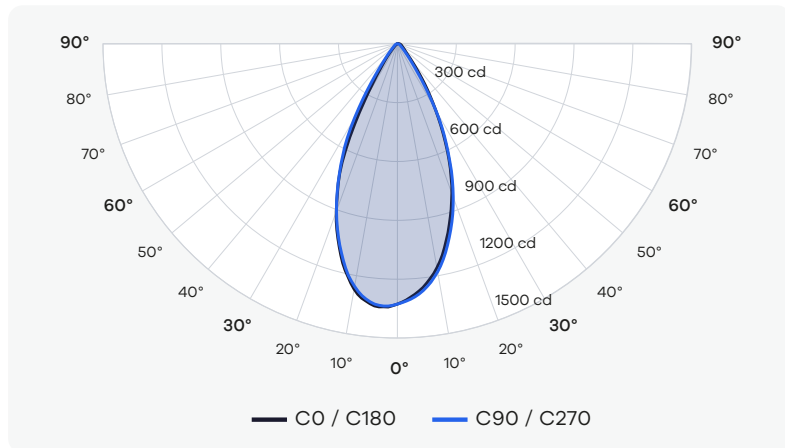

Cone of Light Tabulation

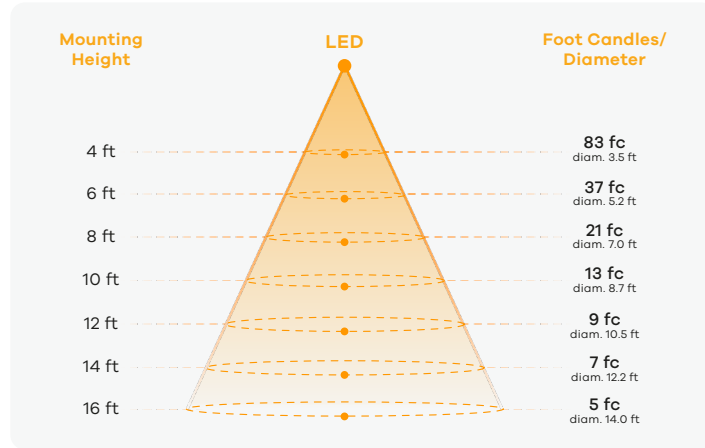

Power Information


Voltage	119.74 V
Current	0.08963 A
Power	10.5 W
Power Factor	0.9776

Summary of Results


Spacing Criteria	0 - 180: 0.44	90 - 270: 0.44	Zone	Lumens	% of Luminaire
Total Lumen Output	910 LM		0 - 40	807	85%
Luminaire Efficacy	76 LM/W		0 - 60	893	94%
Maximun Candela	1327 CD		0 - 80	937	99%

White Flanged Trim (3000K, 98CRI, 49°-Clear, 12W)

Polar Plot

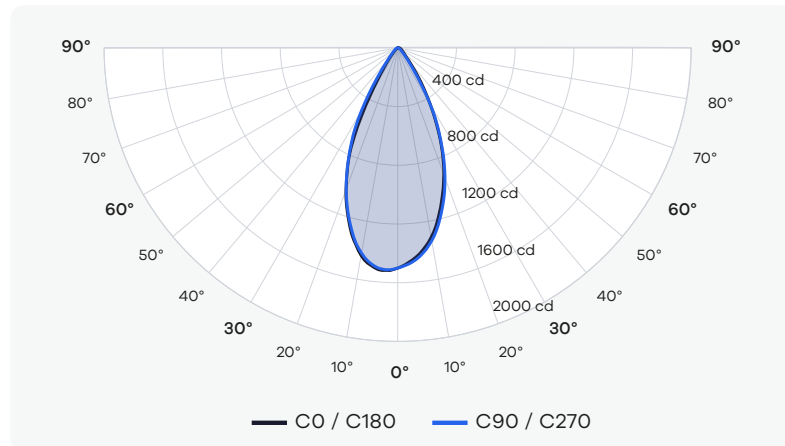

Cone of Light Tabulation

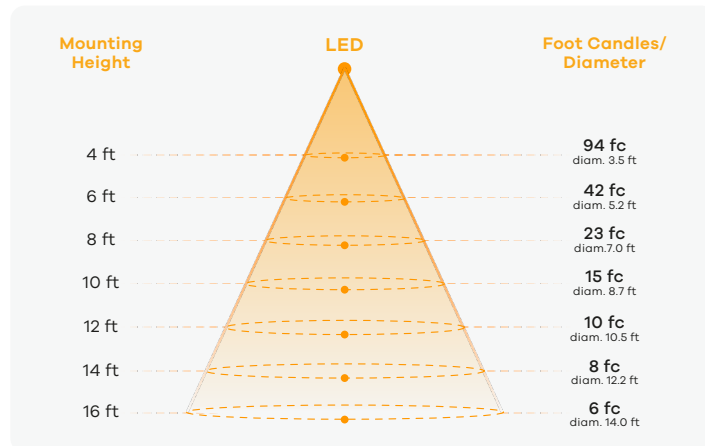

Power Information


Voltage	119.83 V
Current	0.08950 A
Power	10.5 W
Power Factor	0.9779

Summary of Results


Spacing Criteria	0 - 180: 0.44	90 - 270: 0.44	Zone	Lumens	% of Luminaire
Total Lumen Output	1029 LM		0 - 40	913	85%
Luminaire Efficacy	100 LM/W		0 - 60	1010	94%
Maximun Candela	1500 CD		0 - 80	1059	99%

White Flanged Trim (3500K, 98CRI, 49°-Clear, 12W)

Polar Plot

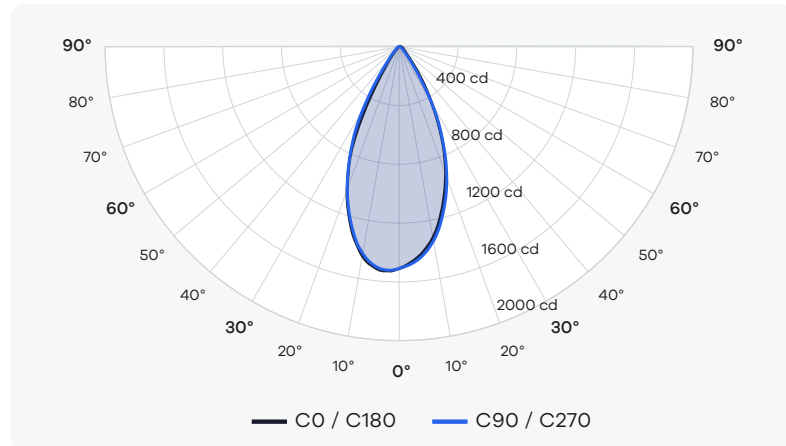

Cone of Light Tabulation

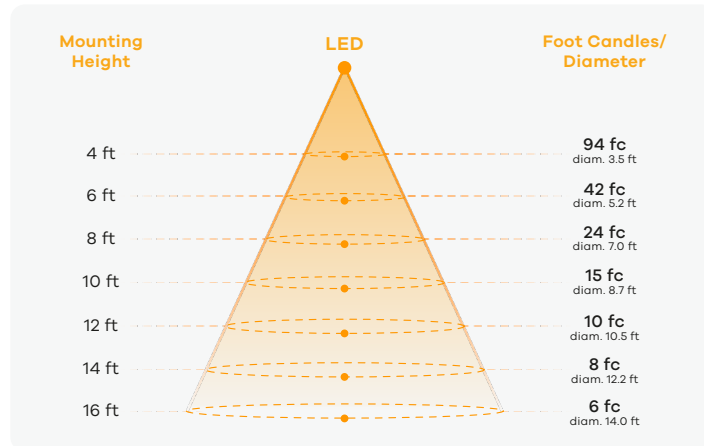

Power Information


Voltage	119.83 V
Current	0.08934 A
Power	10.5 W
Power Factor	0.9778

Summary of Results


Spacing Criteria	0 - 180: 0.44	90 - 270: 0.44	Zone	Lumens	% of Luminaire
Total Lumen Output	1035 LM		0 - 40	918	85%
Luminaire Efficacy	86 LM/W		0 - 60	1016	94%
Maximun Candela	1509 CD		0 - 80	1065	99%

White Flanged Trim (2700K, 98CRI, 31°-Silver Reflector, 12W)

Polar Plot

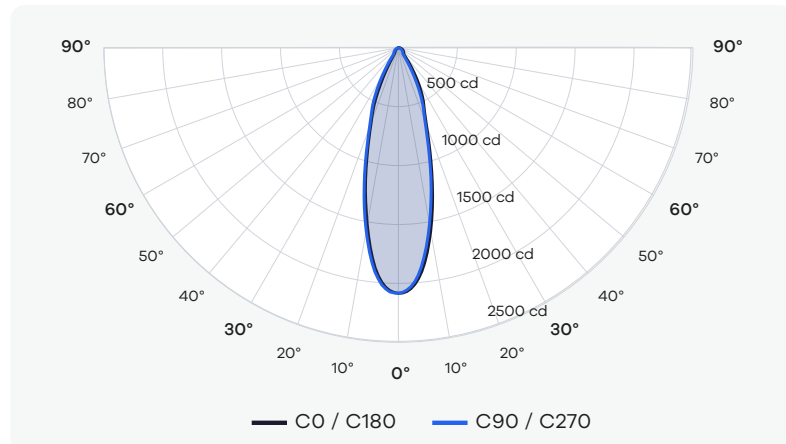

Cone of Light Tabulation

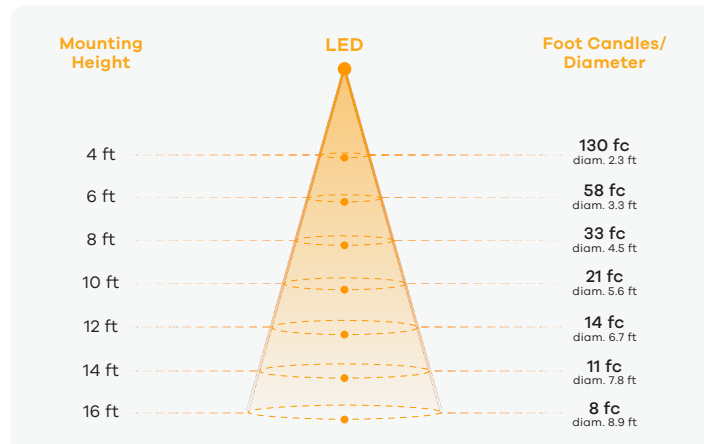

Power Information


Voltage	119.74 V
Current	0.08953 A
Power	10.5 W
Power Factor	0.9776

Summary of Results


Spacing Criteria	0 - 180: 0.28	90 - 270: 0.28	Zone	Lumens	% of Luminaire
Total Lumen Output	858 LM		0 - 40	809	82%
Luminaire Efficacy	72 LM/W		0 - 60	907	92%
Maximun Candela	2084 CD		0 - 80	974	98%

White Flanged Trim (3000K, 98CRI, 31°-Silver Reflector, 12W)

Polar Plot

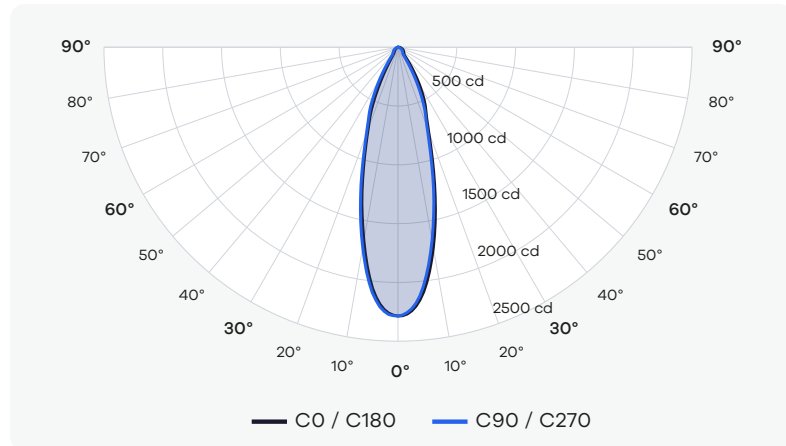

Cone of Light Tabulation

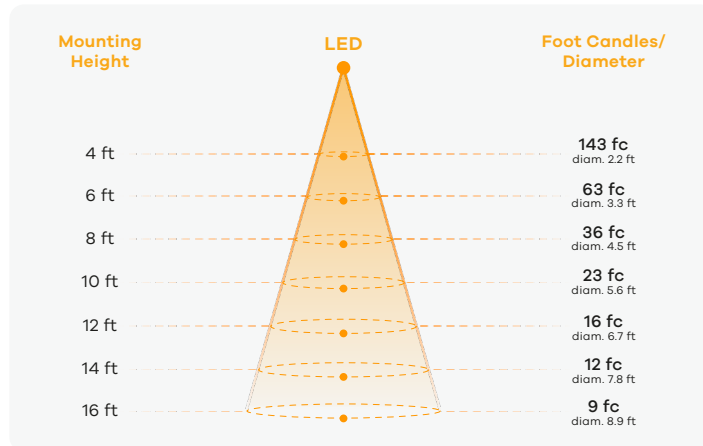

Power Information


Voltage	119.83 V
Current	0.08949 A
Power	10.5 W
Power Factor	0.9779

Summary of Results


Spacing Criteria	0 - 180: 0.28	90 - 270: 0.28	Zone	Lumens	% of Luminaire
Total Lumen Output	942 LM		0 - 40	887	82%
Luminaire Efficacy	91 LM/W		0 - 60	995	92%
Maximun Candela	2286 CD		0 - 80	1068	98%

White Flanged Trim (3500K, 98CRI, 31°-Silver Reflector, 12W)

Polar Plot

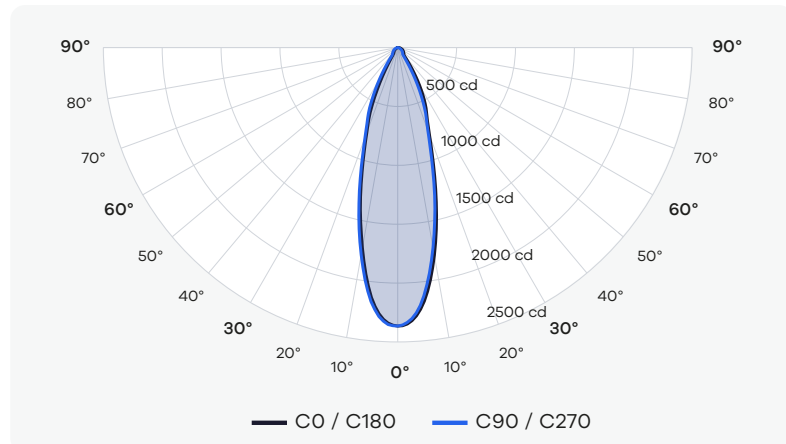

Cone of Light Tabulation

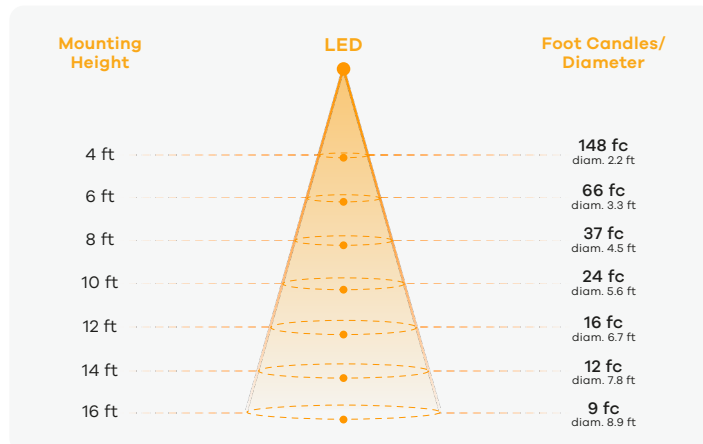

Power Information


Voltage	119.82 V
Current	0.08925 A
Power	10.5 W
Power Factor	0.9778

Summary of Results


Spacing Criteria	0 - 180: 0.28	90 - 270: 0.28	Zone	Lumens	% of Luminaire
Total Lumen Output	974 LM		0 - 40	918	82%
Luminaire Efficacy	81 LM/W		0 - 60	1029	92%
Maximun Candela	2365 CD		0 - 80	1105	98%

White Flanged Trim (2700K, 98CRI, 44°-Silver Reflector, 12W)

Polar Plot

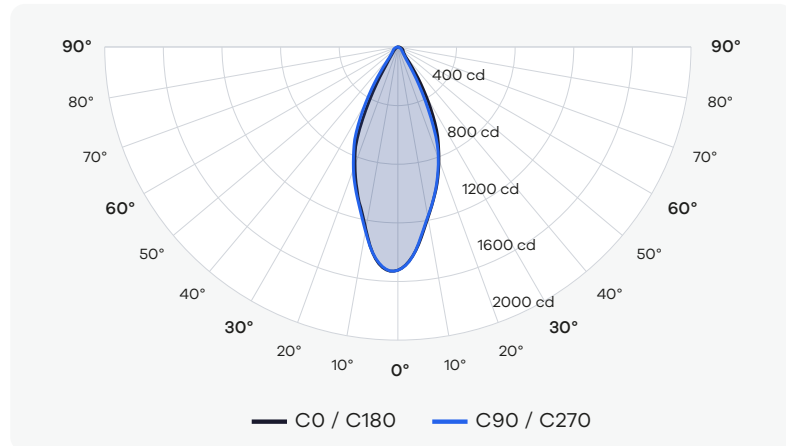

Cone of Light Tabulation

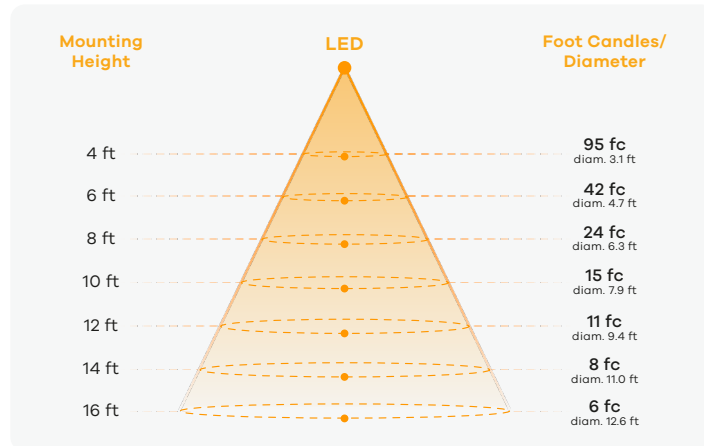

Power Information


Voltage	119.74 V
Current	0.08949 A
Power	10.5 W
Power Factor	0.9776

Summary of Results


Spacing Criteria	0 - 180: 0.39	90 - 270: 0.39	Zone	Lumens	% of Luminaire
Total Lumen Output	896 LM		0 - 40	799	84%
Luminaire Efficacy	88 LM/W		0 - 60	883	93%
Maximun Candela	1523 CD		0 - 80	939	99%

White Flanged Trim (3000K, 98CRI, 44°-Silver Reflector, 12W)

Polar Plot

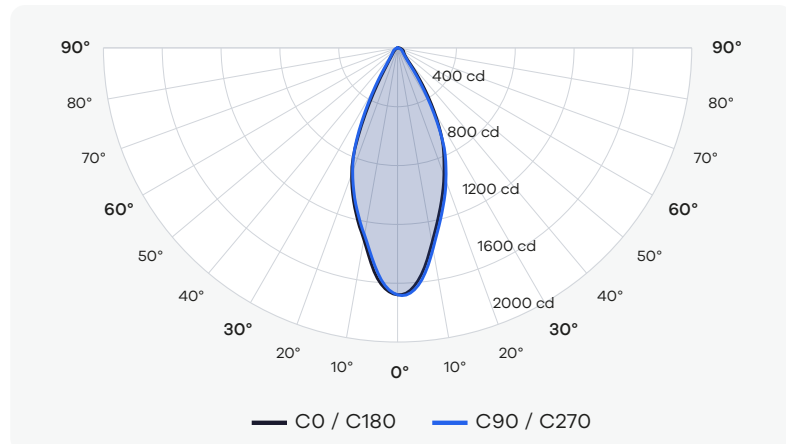

Cone of Light Tabulation

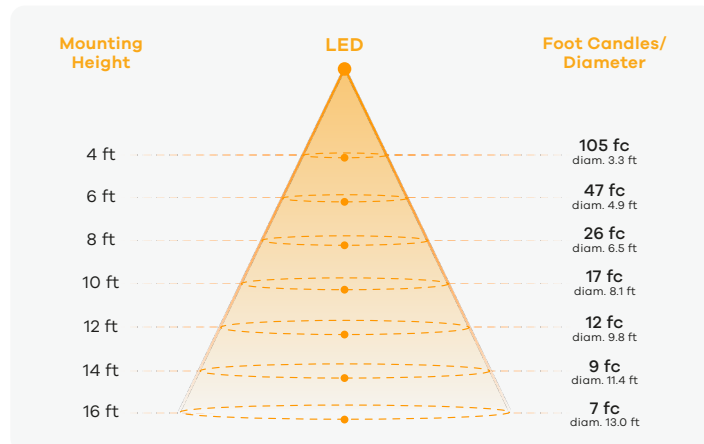

Power Information


Voltage	119.74 V
Current	0.08949 A
Power	10.5 W
Power Factor	0.9776

Summary of Results


Spacing Criteria	0 - 180: 0.41	90 - 270: 0.41	Zone	Lumens	% of Luminaire
Total Lumen Output	981 LM		0 - 40	951	83%
Luminaire Efficacy	95 LM/W		0 - 60	1053	92%
Maximun Candela	1679 CD		0 - 80	1123	98%

White Flanged Trim (3500K, 98CRI, 44°-Silver Reflector, 12W)

Polar Plot

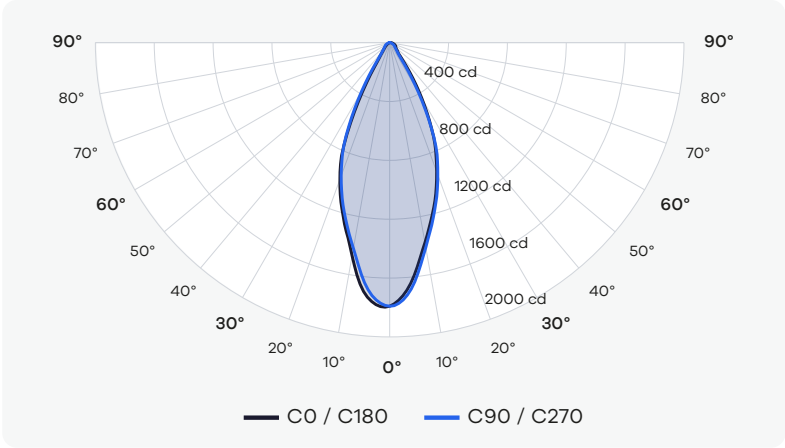

Cone of Light Tabulation

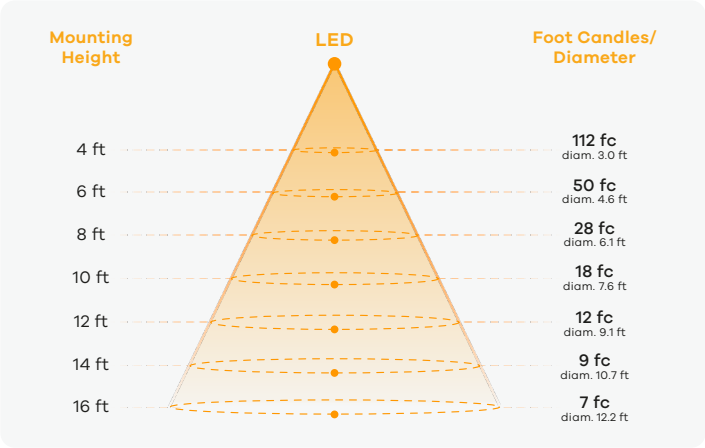

Power Information

Voltage	119.74 V
Current	0.08949 A
Power	10.4 W
Power Factor	0.9776

Summary of Results

Spacing Criteria	0 - 180: 0.38	90 - 270: 0.38	Zone	Lumens	% of Luminaire
Total Lumen Output	1021 LM		0 - 40	921	83%
Luminaire Efficacy	99 LM/W		0 - 60	1021	92%
Maximun Candela	1791 CD		0 - 80	1089	99%