



White Flanged Trim (2700K, 98CRI, 34°-Clear, 15W)

Polar Plot

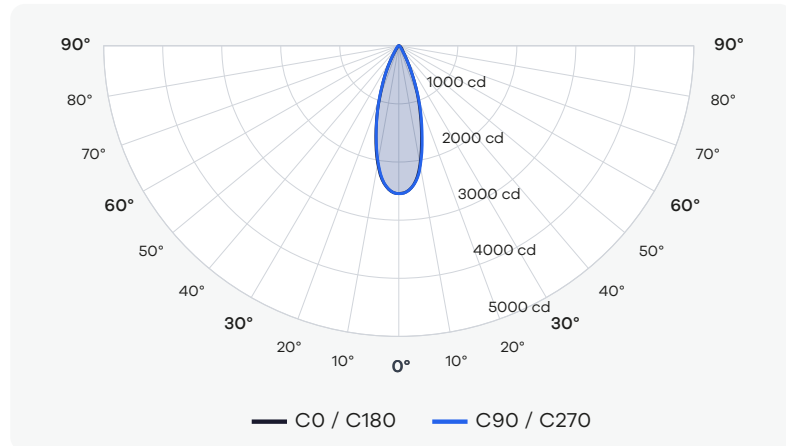

Cone of Light Tabulation

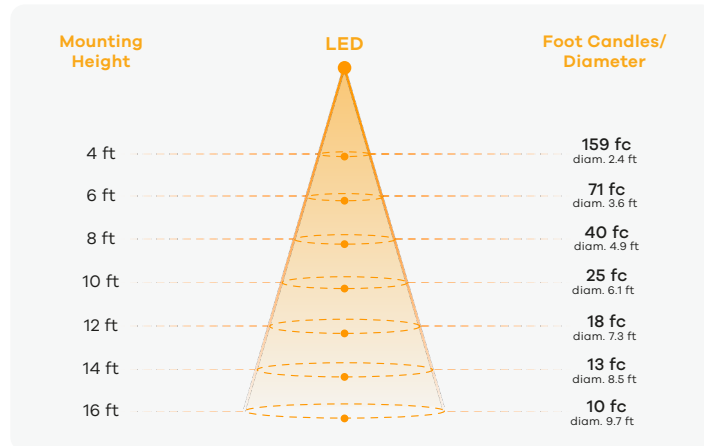

Power Information


Voltage	119.73 V
Current	0.1164 A
Power	13.6 W
Power Factor	0.9781

Summary of Results


Spacing Criteria	0 - 180: 0.3	90 - 270: 0.3	Zone	Lumens	% of Luminaire
Total Lumen Output	1042 LM		0 - 40	962	86%
Luminaire Efficacy	69 LM/W		0 - 60	1058	95%
Maximun Candela	2543 CD		0 - 80	1105	99%

White Flanged Trim (3000K, 98CRI, 34°-Clear, 15W)

Polar Plot

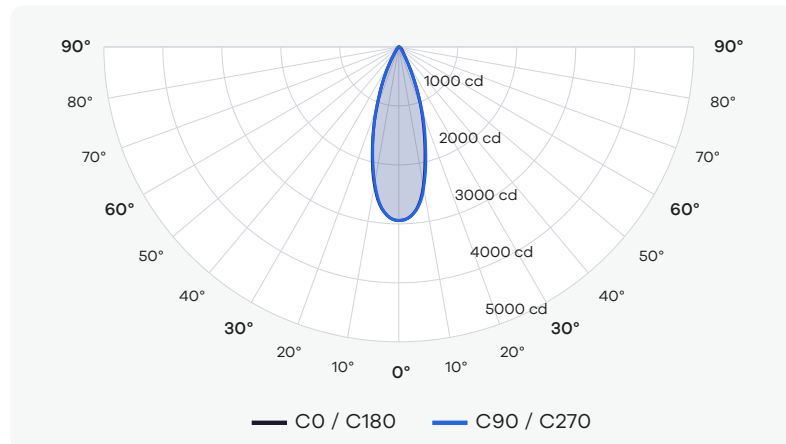

Cone of Light Tabulation

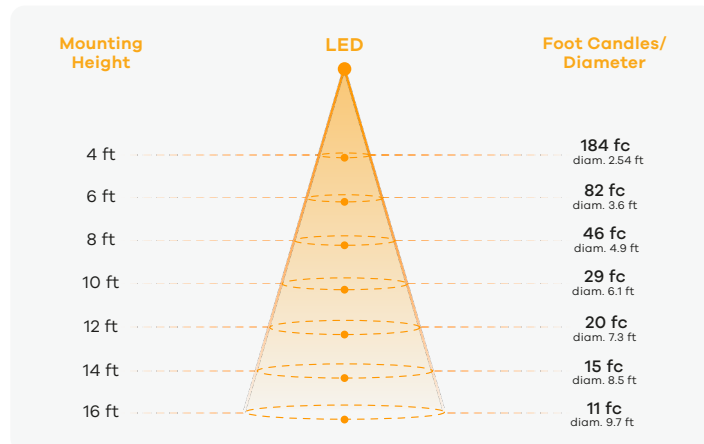

Power Information


Voltage	119.78 V
Current	0.1175 A
Power	13.8 W
Power Factor	0.9785

Summary of Results


Spacing Criteria	0 - 180: 0.3	90 - 270: 0.3	Zone	Lumens	% of Luminaire
Total Lumen Output	1205 LM		0 - 40	1113	86%
Luminaire Efficacy	90 LM/W		0 - 60	1224	95%
Maximun Candela	2942 CD		0 - 80	1278	99%

White Flanged Trim (3500K, 98CRI, 34°-Clear, 15W)

Polar Plot

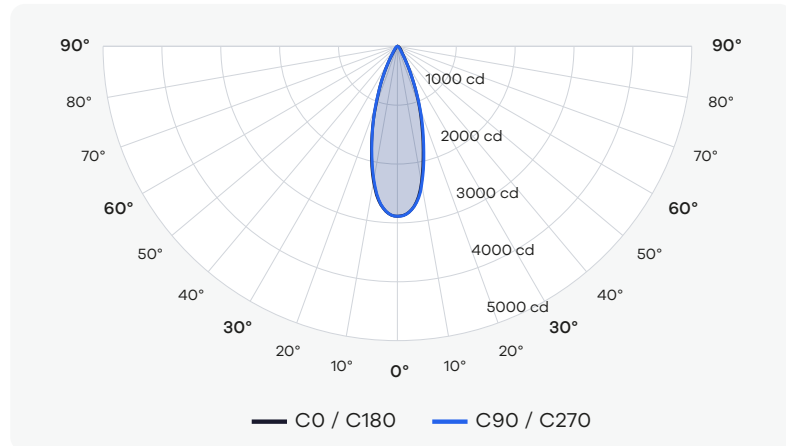

Cone of Light Tabulation

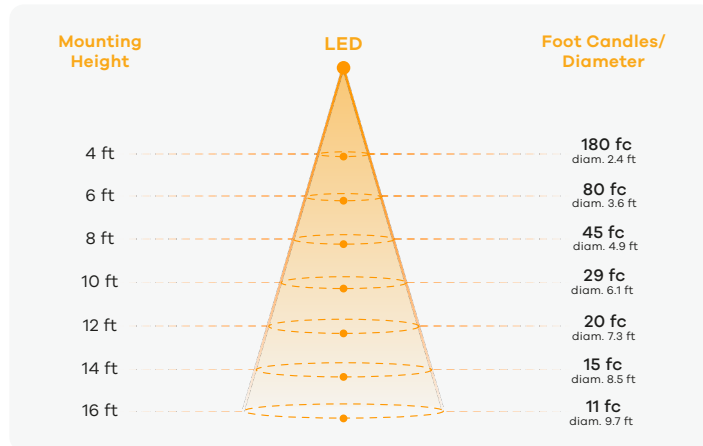

Power Information


Voltage	119.79 V
Current	0.1167 A
Power	13.7 W
Power Factor	0.9781

Summary of Results


Spacing Criteria	0 - 180: 0.3	90 - 270: 0.3	Zone	Lumens	% of Luminaire
Total Lumen Output	1183 LM		0 - 40	1092	86%
Luminaire Efficacy	79 LM/W		0 - 60	1201	95%
Maximum Candela	2887 CD		0 - 80	1254	99%

White Flanged Trim (2700K, 98CRI, 40°-Clear, 15W)

Polar Plot

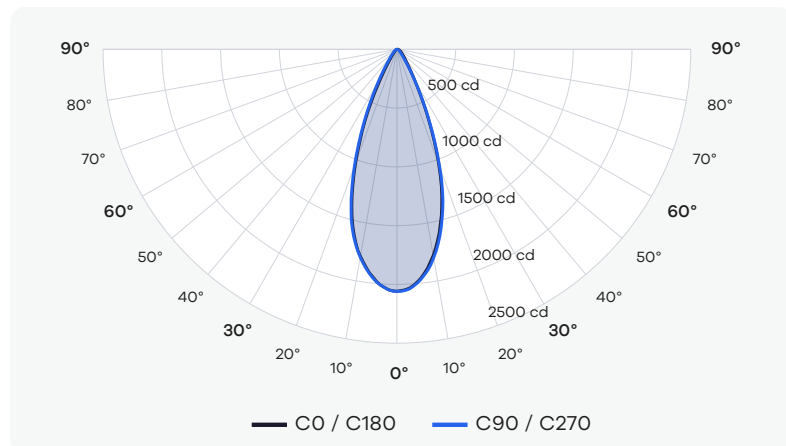

Cone of Light Tabulation

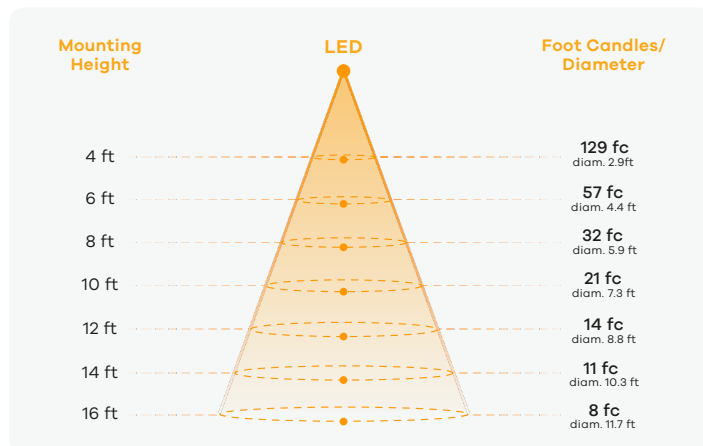

Power Information


Voltage	119.71 V
Current	0.1166 A
Power	13.7 W
Power Factor	0.9781

Summary of Results


Spacing Criteria	0 - 180: 0.37	90 - 270: 0.37	Zone	Lumens	% of Luminaire
Total Lumen Output	1054 LM		0 - 40	969	85%
Luminaire Efficacy	70 LM/W		0 - 60	1071	94%
Maximum Candela	2059 CD		0 - 80	1122	99%

White Flanged Trim (3000K, 98CRI, 40°-Clear, 15W)

Polar Plot

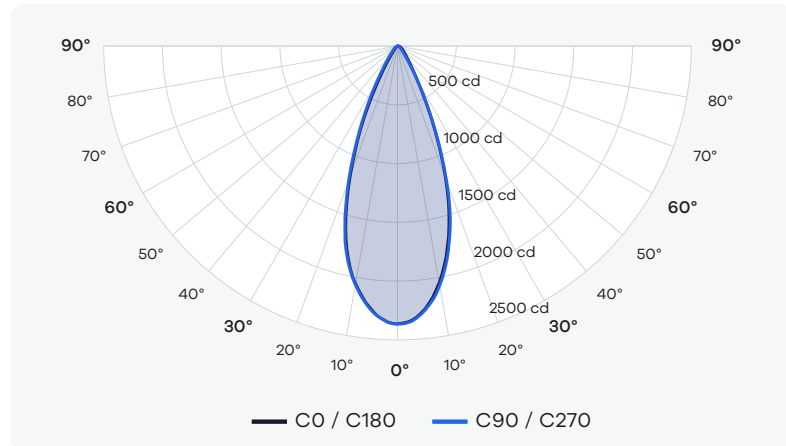

Cone of Light Tabulation

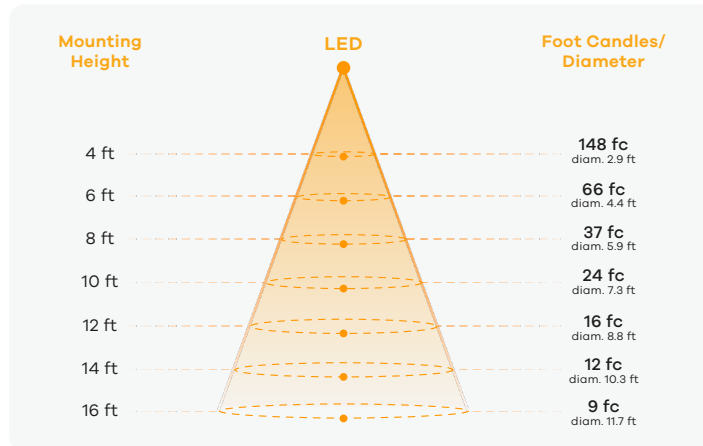

Power Information


Voltage	119.78 V
Current	0.1173 A
Power	13.8 W
Power Factor	0.9784

Summary of Results


Spacing Criteria	0 - 180: 0.37	90 - 270: 0.37	Zone	Lumens	% of Luminaire
Total Lumen Output	1211 LM		0 - 40	1114	85%
Luminaire Efficacy	90 LM/W		0 - 60	1231	94%
Maximun Candela	2365 CD		0 - 80	1289	99%

White Flanged Trim (3500K, 98CRI, 40°-Clear, 15W)

Polar Plot

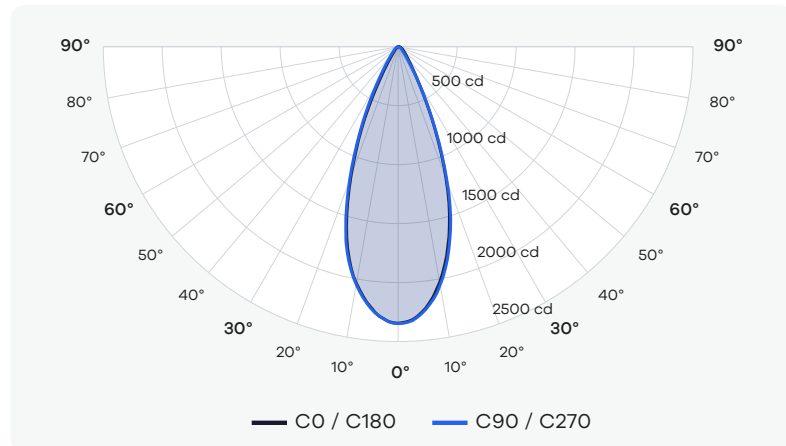

Cone of Light Tabulation

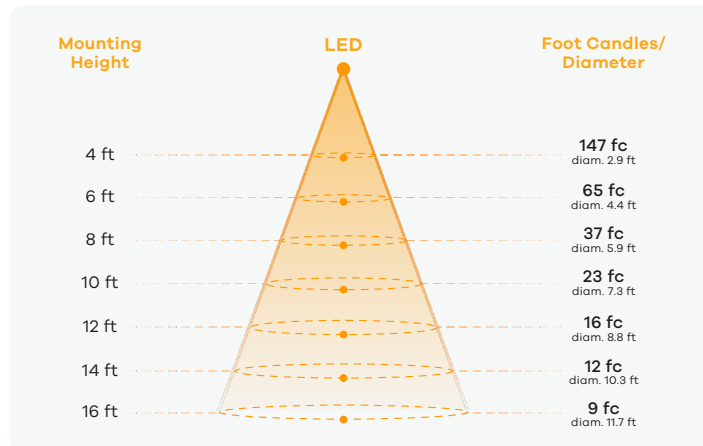

Power Information


Voltage	119.80 V
Current	0.1167 A
Power	13.7 W
Power Factor	0.9781

Summary of Results


Spacing Criteria	0 - 180: 0.37	90 - 270: 0.37	Zone	Lumens	% of Luminaire
Total Lumen Output	1201 LM		0 - 40	1104	85%
Luminaire Efficacy	80 LM/W		0 - 60	1221	94%
Maximun Candela	2345 CD		0 - 80	1278	99%

White Flanged Trim (2700K, 98CRI, 49°-Clear, 15W)

Polar Plot

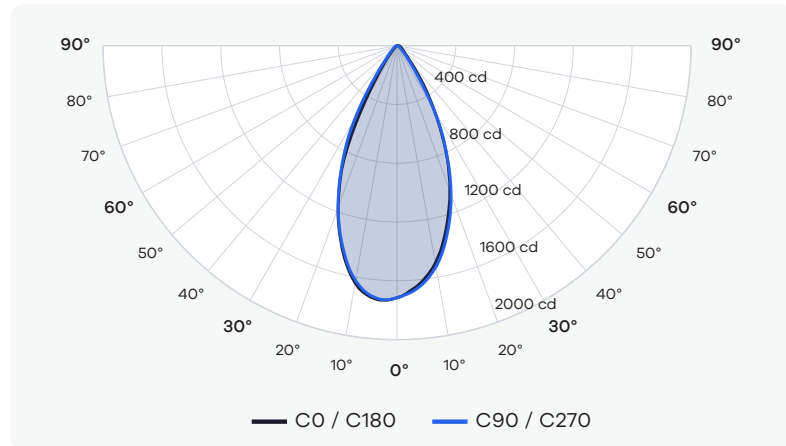

Cone of Light Tabulation

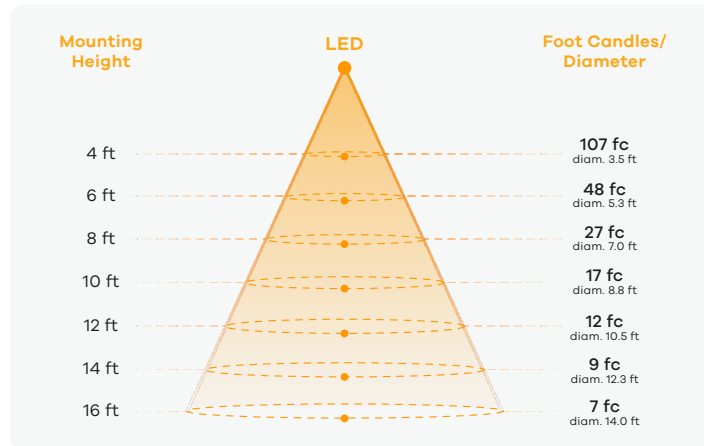

Power Information


Voltage	119.71 V
Current	0.1167 A
Power	13.7 W
Power Factor	0.9781

Summary of Results


Spacing Criteria	0 - 180: 0.44	90 - 270: 0.44	Zone	Lumens	% of Luminaire
Total Lumen Output	1176 LM		0 - 40	1047	85%
Luminaire Efficacy	78 LM/W		0 - 60	1158	94%
Maximum Candela	1716 CD		0 - 80	1214	99%

White Flanged Trim (3000K, 98CRI, 49°-Clear, 15W)

Polar Plot

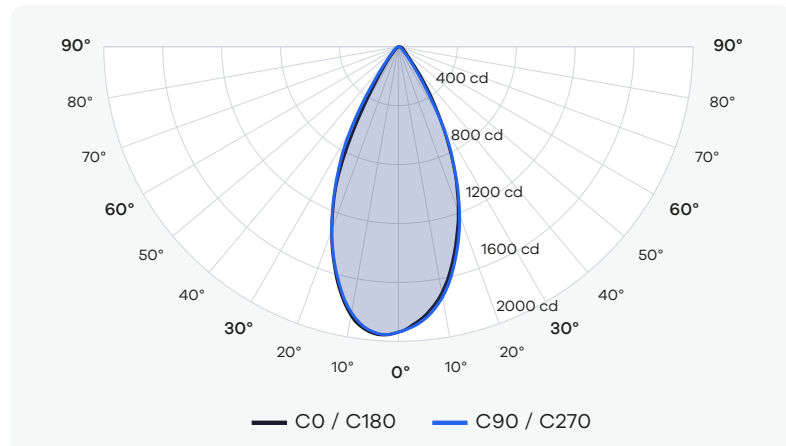

Cone of Light Tabulation

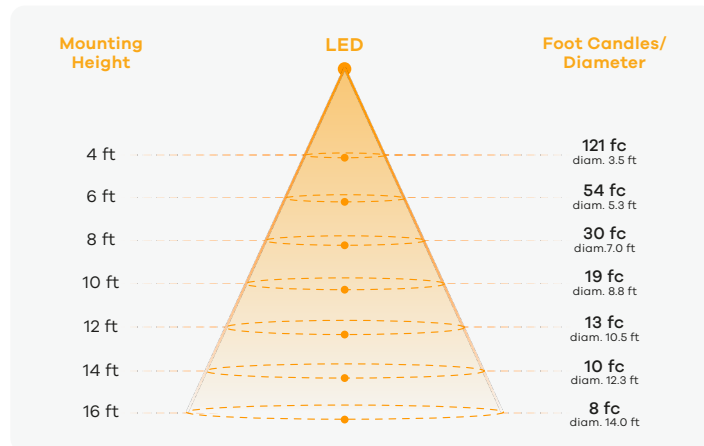

Power Information


Voltage	119.78 V
Current	0.1173 A
Power	13.8 W
Power Factor	0.9784

Summary of Results


Spacing Criteria	0 - 180: 0.44	90 - 270: 0.44	Zone	Lumens	% of Luminaire
Total Lumen Output	1328 LM		0 - 40	1183	85%
Luminaire Efficacy	99 LM/W		0 - 60	1307	94%
Maximum Candela	1938 CD		0 - 80	1371	99%

White Flanged Trim (3500K, 98CRI, 49°-Clear, 15W)

Polar Plot

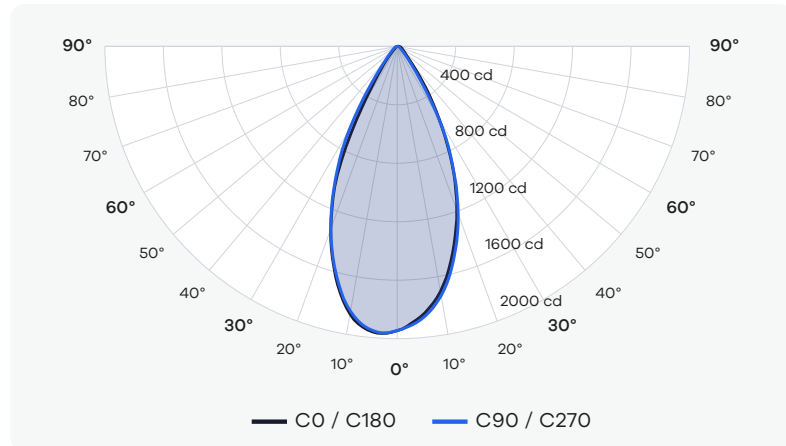

Cone of Light Tabulation

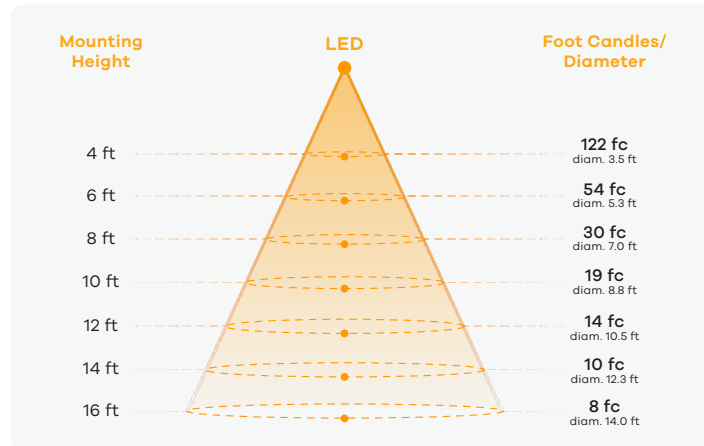

Power Information


Voltage	119.78 V
Current	0.1168 A
Power	13.7 W
Power Factor	0.9781

Summary of Results


Spacing Criteria	0 - 180: 0.44	90 - 270: 0.44	Zone	Lumens	% of Luminaire
Total Lumen Output	1333 LM		0 - 40	1187	85%
Luminaire Efficacy	89 LM/W		0 - 60	1312	94%
Maximun Candela	1945 CD		0 - 80	1376	99%

White Flanged Trim (2700K, 98CRI, 31°-Silver Reflector, 15W)

Polar Plot

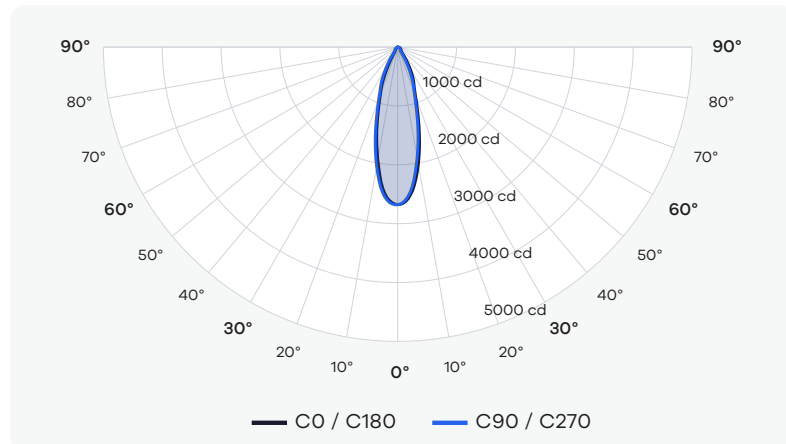

Cone of Light Tabulation

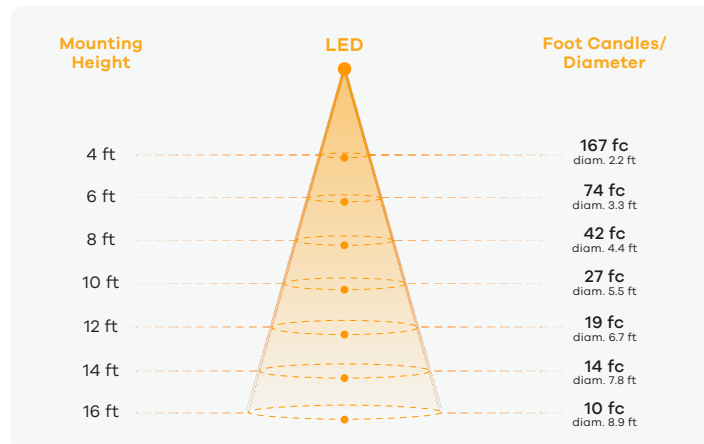

Power Information


Voltage	119.72 V
Current	0.1168 A
Power	13.7 W
Power Factor	0.9781

Summary of Results


Spacing Criteria	0 - 180: 0.28	90 - 270: 0.28	Zone	Lumens	% of Luminaire
Total Lumen Output	1097 LM		0 - 40	1031	82%
Luminaire Efficacy	73 LM/W		0 - 60	1155	92%
Maximun Candela	2677 CD		0 - 80	1241	98%

White Flanged Trim (3000K, 98CRI, 31°-Silver Reflector, 15W)

Polar Plot

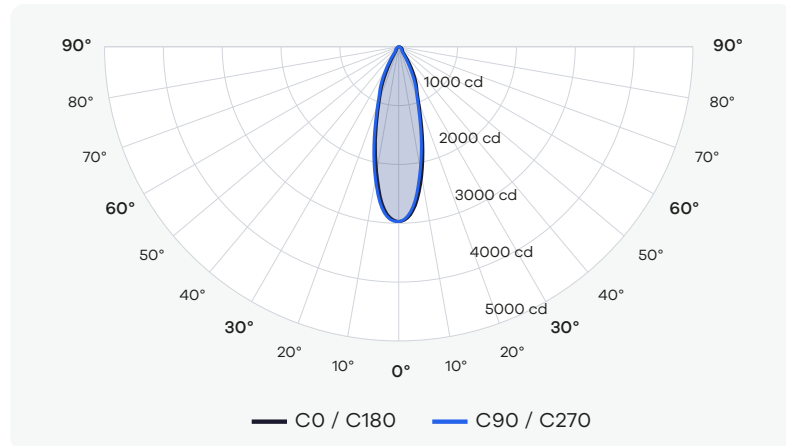

Cone of Light Tabulation

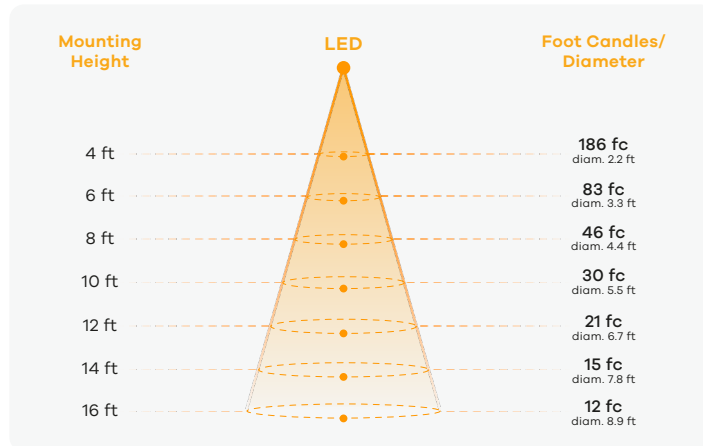

Power Information


Voltage	119.79 V
Current	0.1172 A
Power	13.7 W
Power Factor	0.9785

Summary of Results


Spacing Criteria	0 - 180: 0.28	90 - 270: 0.28	Zone	Lumens	% of Luminaire
Total Lumen Output	1217 LM		0 - 40	1144	82%
Luminaire Efficacy	91 LM/W		0 - 60	1282	92%
Maximum Candela	2970 CD		0 - 80	1377	98%

White Flanged Trim (3500K, 98CRI, 31°-Silver Reflector, 15W)

Polar Plot

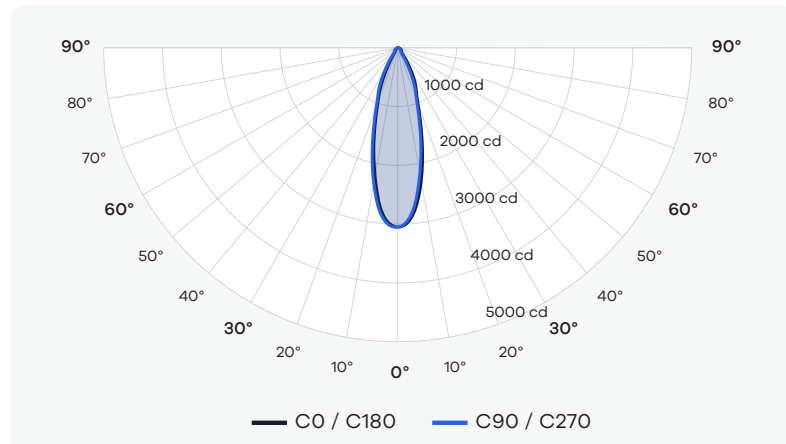

Cone of Light Tabulation

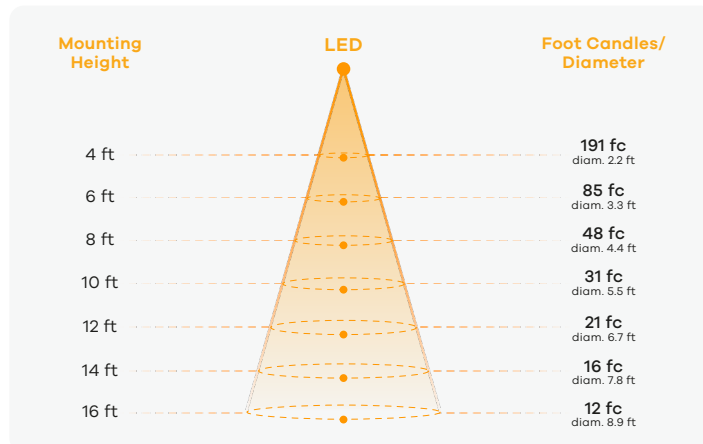

Power Information


Voltage	119.79 V
Current	0.1167 A
Power	13.7 W
Power Factor	0.9781

Summary of Results


Spacing Criteria	0 - 180: 0.28	90 - 270: 0.28	Zone	Lumens	% of Luminaire
Total Lumen Output	1251 LM		0 - 40	1175	82%
Luminaire Efficacy	83 LM/W		0 - 60	1317	92%
Maximum Candela	3052 CD		0 - 80	1414	98%

White Flanged Trim (2700K, 98CRI, 44°-Silver Reflector, 15W)

Polar Plot

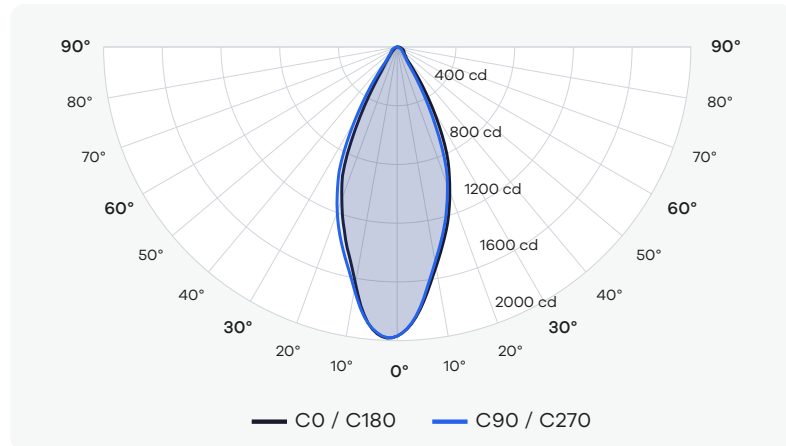

Cone of Light Tabulation

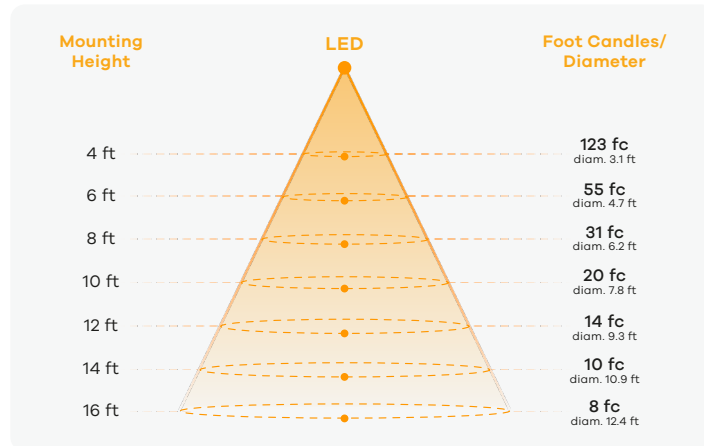

Power Information


Voltage	119.80 V
Current	0.1173 A
Power	13.7 W
Power Factor	0.9781

Summary of Results


Spacing Criteria	0 - 180: 0.39	90 - 270: 0.39	Zone	Lumens	% of Luminaire
Total Lumen Output	1158 LM		0 - 40	1020	84%
Luminaire Efficacy	87 LM/W		0 - 60	1129	93%
Maximun Candela	1969 CD		0 - 80	1202	99%

White Flanged Trim (3000K, 98CRI, 44°-Silver Reflector, 15W)

Polar Plot

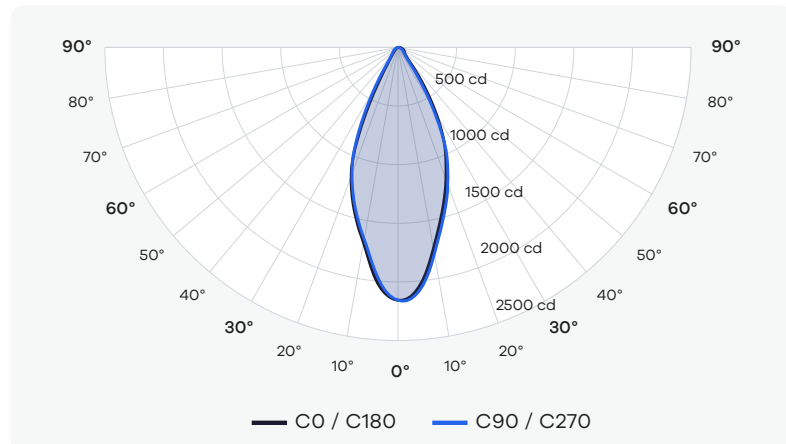

Cone of Light Tabulation

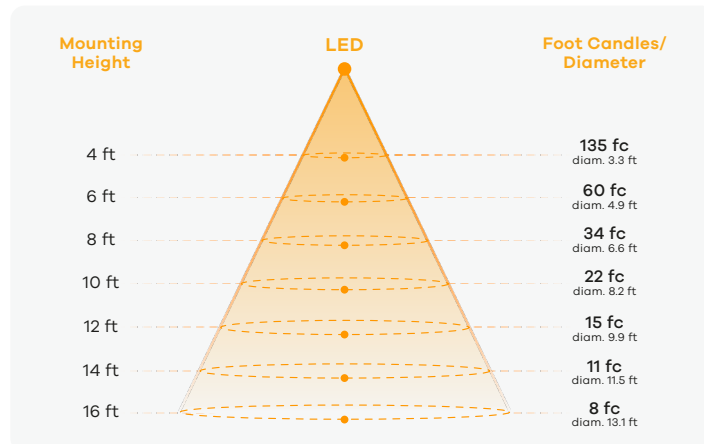

Power Information


Voltage	119.80 V
Current	0.1173 A
Power	13.7 W
Power Factor	0.9781

Summary of Results


Spacing Criteria	0 - 180: 0.41	90 - 270: 0.41	Zone	Lumens	% of Luminaire
Total Lumen Output	1264 LM		0 - 40	1236	83%
Luminaire Efficacy	95 LM/W		0 - 60	1370	92%
Maximun Candela	2156 CD		0 - 80	1461	98%

White Flanged Trim (3500K, 98CRI, 44°-Silver Reflector, 15W)

Polar Plot

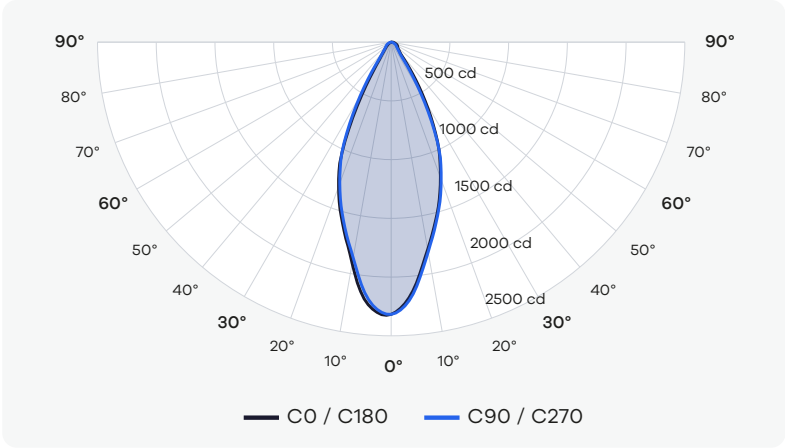

Cone of Light Tabulation

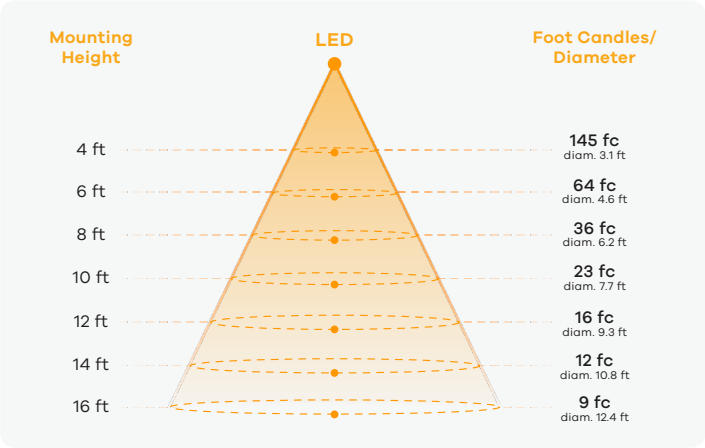

Power Information

Voltage	119.80 V
Current	0.1173 A
Power	13.7 W
Power Factor	0.9781

Summary of Results

Spacing Criteria	0 - 180: 0.39	90 - 270: 0.39	Zone	Lumens	% of Luminaire
Total Lumen Output	1346 LM		0 - 40	1210	83%
Luminaire Efficacy	100 LM/W		0 - 60	1342	92%
Maximun Candela	2317 CD		0 - 80	1432	99%