



White Flanged Trim (2700K, 98CRI, 34°-Clear, 28W)

Polar Plot

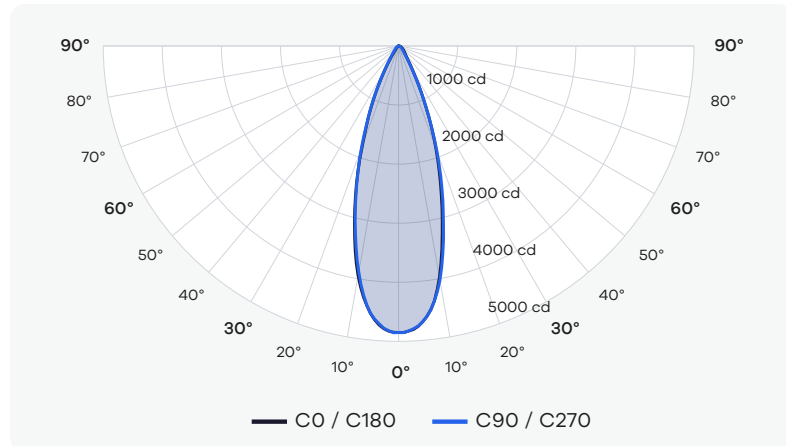

Cone of Light Tabulation

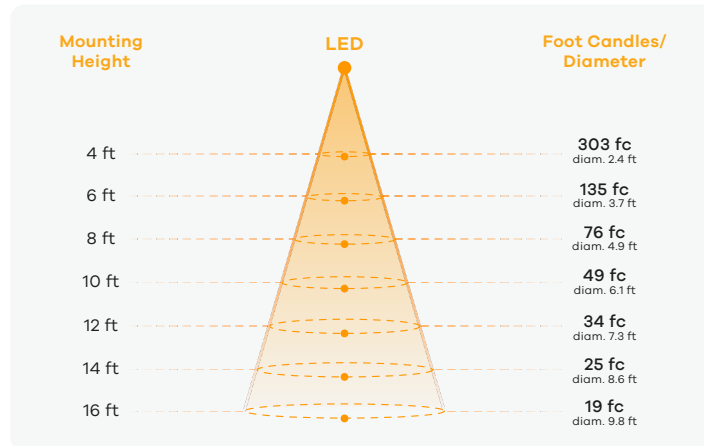

Power Information


Voltage	119.67 V
Current	0.2306 A
Power	27.1 W
Power Factor	0.9816

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	1992 LM		0 - 40	1847	86%
Luminaire Efficacy	71 LM/W		0 - 60	2031	95%
Maximun Candela	4851 CD		0 - 80	2120	99%

White Flanged Trim (3000K, 98CRI, 34°-Clear, 28W)

Polar Plot

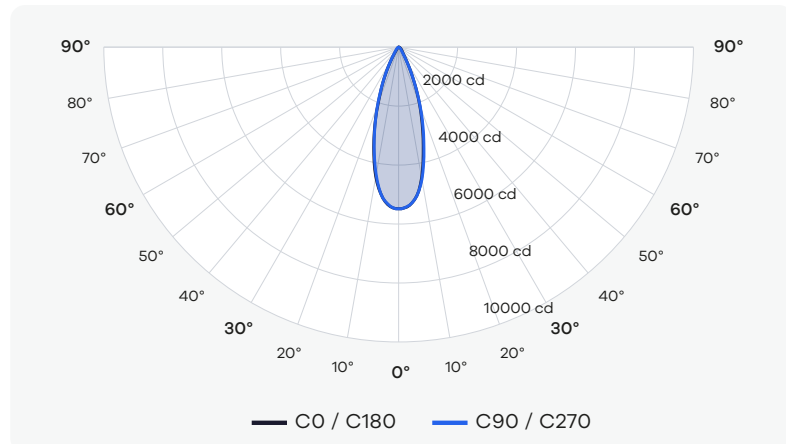

Cone of Light Tabulation

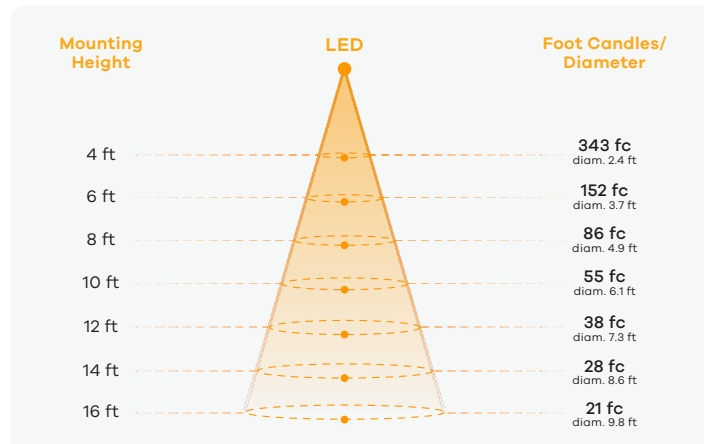

Power Information


Voltage	119.68 V
Current	0.2344 A
Power	27.6 W
Power Factor	0.9821

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	2251 LM		0 - 40	2087	86%
Luminaire Efficacy	84 LM/W		0 - 60	2295	95%
Maximun Candela	5482 CD		0 - 80	2395	99%

White Flanged Trim (3500K, 98CRI, 34°-Clear, 28W)

Polar Plot

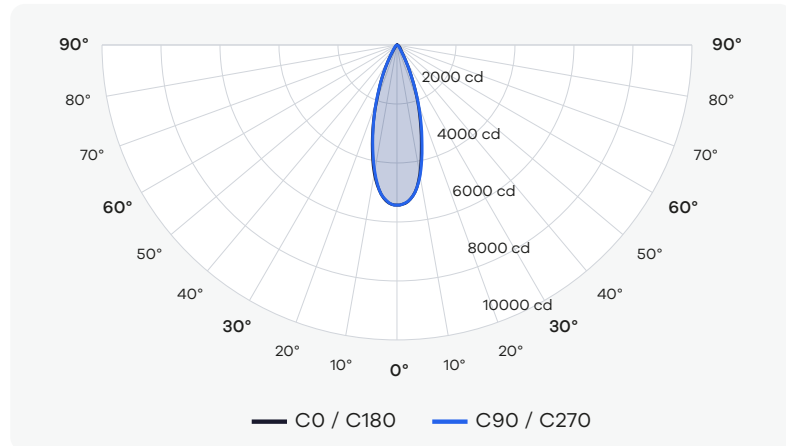

Cone of Light Tabulation

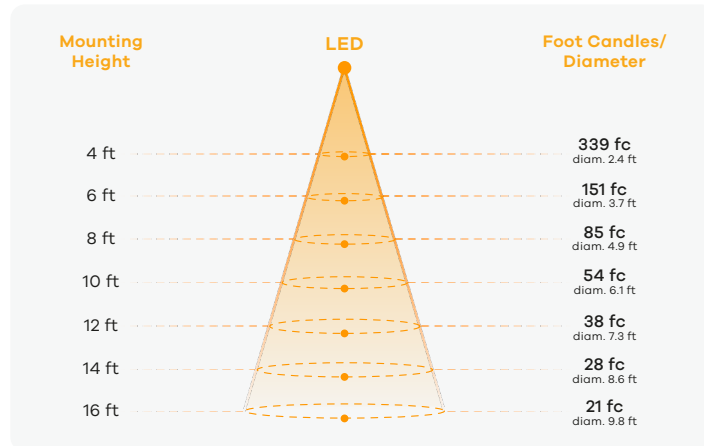

Power Information


Voltage	119.71 V
Current	0.2307 A
Power	27.1 W
Power Factor	0.9818

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	2229 LM		0 - 40	2067	86%
Luminaire Efficacy	80 LM/W		0 - 60	2272	95%
Maximun Candela	5428 CD		0 - 80	2372	99%

White Flanged Trim (2700K, 98CRI, 40°-Clear, 28W)

Polar Plot

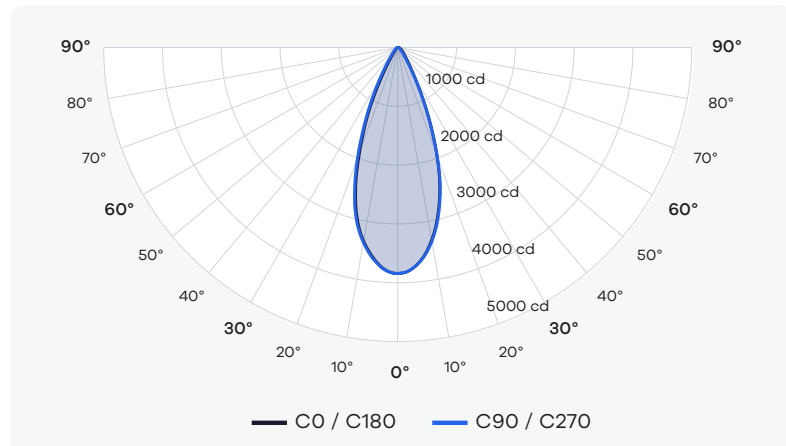

Cone of Light Tabulation

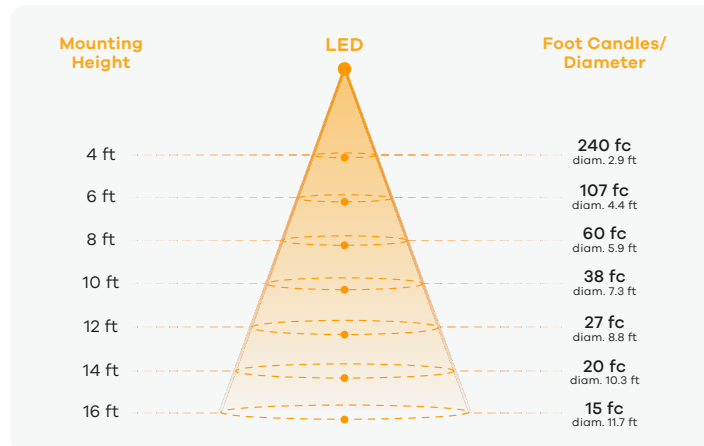

Power Information


Voltage	119.70 V
Current	0.2301 A
Power	27.0 W
Power Factor	0.9815

Summary of Results


Spacing Criteria	0 - 180: 0.37	90 - 270: 0.37	Zone	Lumens	% of Luminaire
Total Lumen Output	1966 LM		0 - 40	1813	85%
Luminaire Efficacy	70 LM/W		0 - 60	2003	94%
Maximun Candela	3843 CD		0 - 80	2097	99%

White Flanged Trim (3000K, 98CRI, 40°-Clear, 28W)

Polar Plot

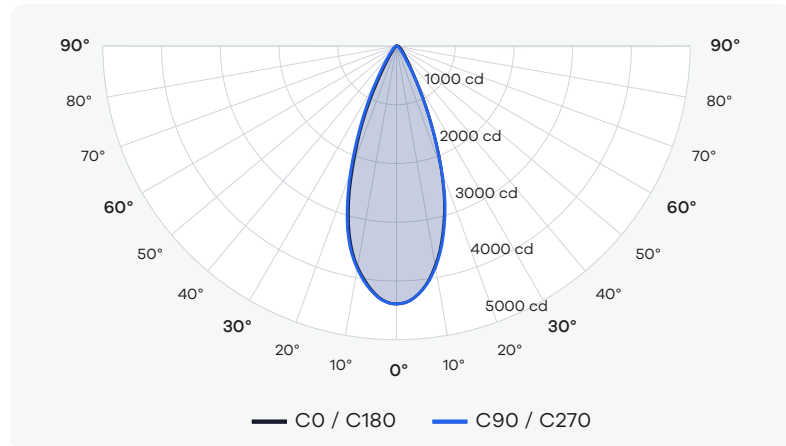

Cone of Light Tabulation

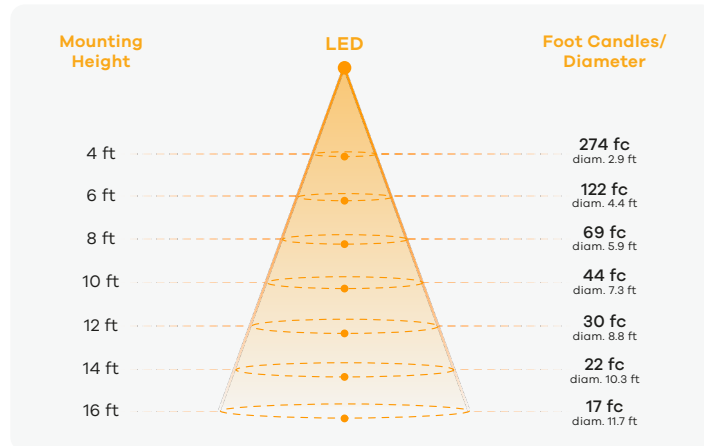

Power Information


Voltage	119.69 V
Current	0.2339 A
Power	27.5 W
Power Factor	0.9821

Summary of Results


Spacing Criteria	0 - 180: 0.37	90 - 270: 0.37	Zone	Lumens	% of Luminaire
Total Lumen Output	2247 LM		0 - 40	2072	85%
Luminaire Efficacy	84 LM/W		0 - 60	2289	94%
Maximun Candela	4392 CD		0 - 80	2396	99%

White Flanged Trim (3500K, 98CRI, 40°-Clear, 28W)

Polar Plot

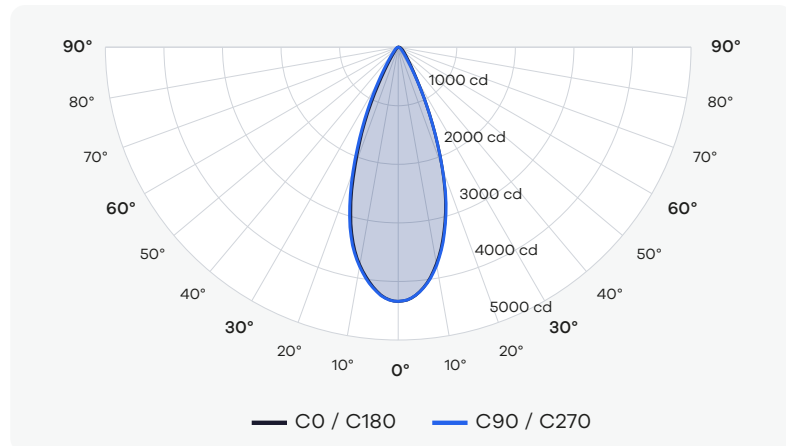

Cone of Light Tabulation

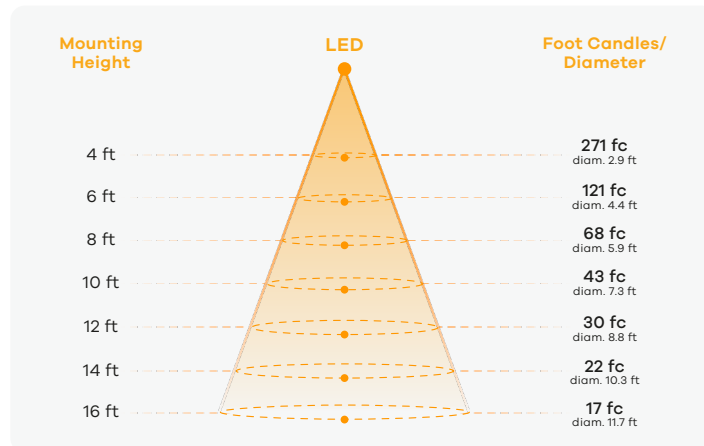

Power Information


Voltage	119.71 V
Current	0.2305 A
Power	27.1 W
Power Factor	0.9817

Summary of Results


Spacing Criteria	0 - 180: 0.37	90 - 270: 0.37	Zone	Lumens	% of Luminaire
Total Lumen Output	2221 LM		0 - 40	2048	85%
Luminaire Efficacy	79 LM/W		0 - 60	2263	94%
Maximun Candela	4341 CD		0 - 80	2368	99%

White Flanged Trim (2700K, 98CRI, 49°-Clear, 28W)

Polar Plot

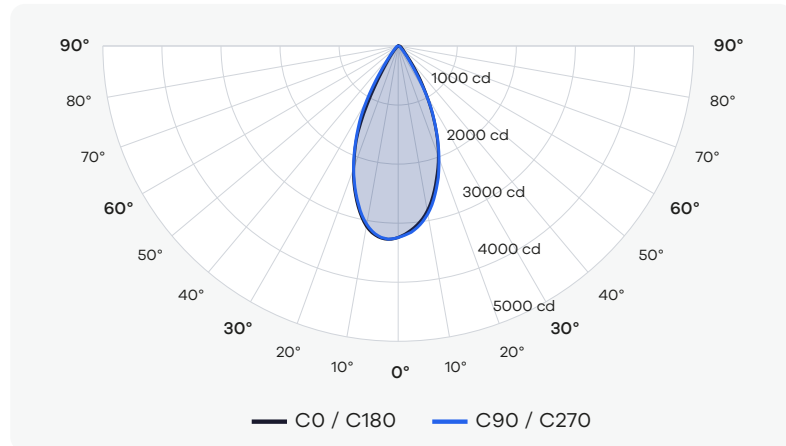

Cone of Light Tabulation

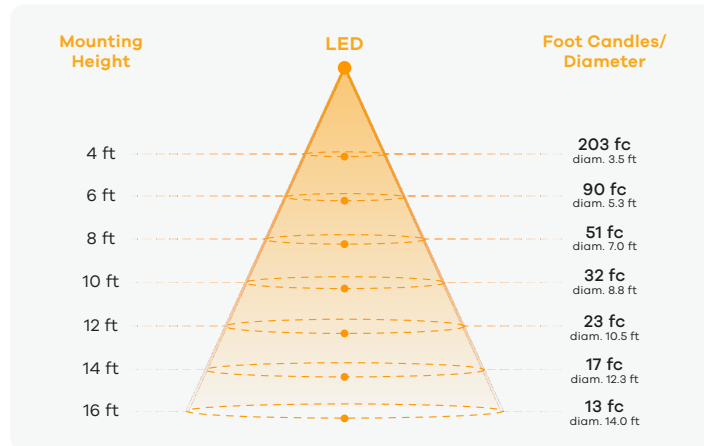

Power Information


Voltage	119.69 V
Current	0.2299 A
Power	27.0 W
Power Factor	0.9815

Summary of Results


Spacing Criteria	0 - 180: 0.44	90 - 270: 0.44	Zone	Lumens	% of Luminaire
Total Lumen Output	2214 LM		0 - 40	1978	85%
Luminaire Efficacy	79 LM/W		0 - 60	2185	94%
Maximun Candela	3242 CD		0 - 80	2290	99%

White Flanged Trim (3000K, 98CRI, 49°-Clear, 28W)

Polar Plot

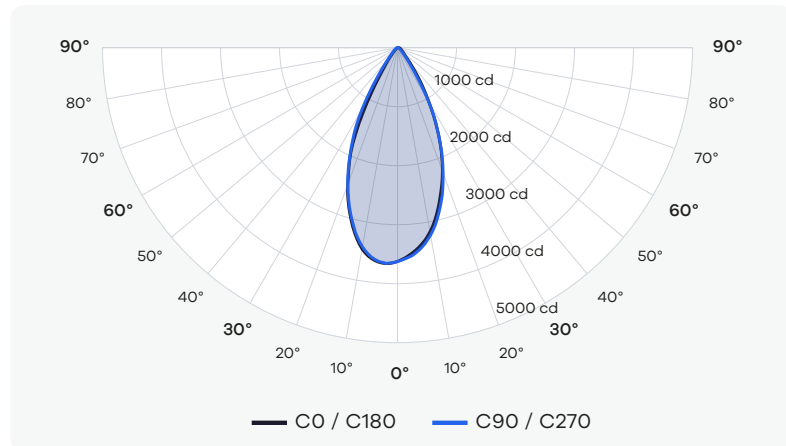

Cone of Light Tabulation

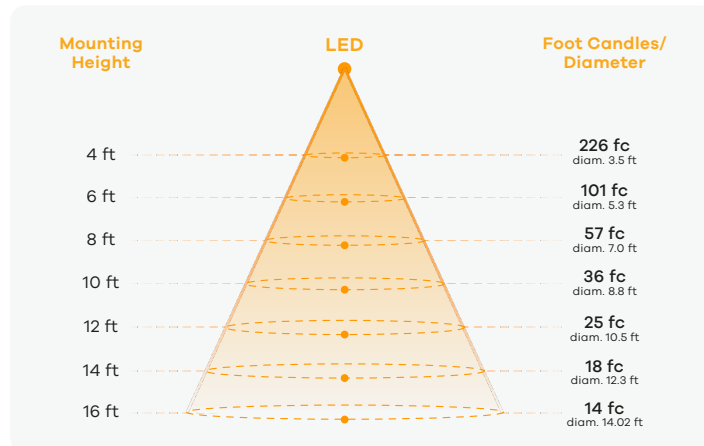

Power Information


Voltage	119.70 V
Current	0.2337 A
Power	27.5 W
Power Factor	0.9821

Summary of Results


Spacing Criteria	0 - 180: 0.44	90 - 270: 0.44	Zone	Lumens	% of Luminaire
Total Lumen Output	2475 LM		0 - 40	2211	85%
Luminaire Efficacy	93 LM/W		0 - 60	2442	94%
Maximun Candela	3624 CD		0 - 80	2559	99%

White Flanged Trim (3500K, 98CRI, 49°-Clear, 28W)

Polar Plot

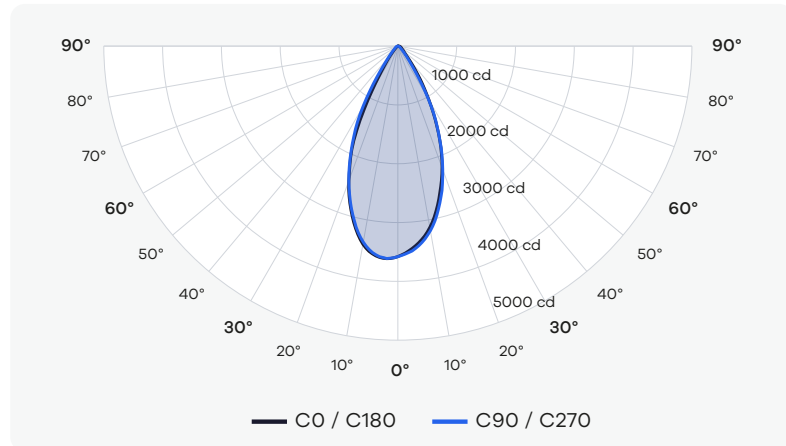

Cone of Light Tabulation

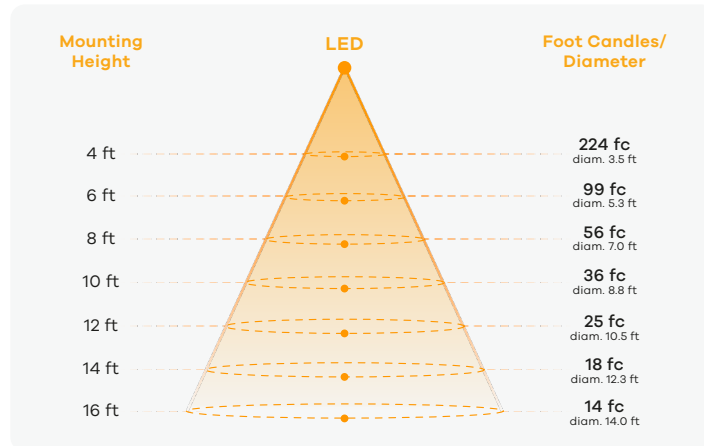

Power Information


Voltage	119.71 V
Current	0.2302 A
Power	27.1 W
Power Factor	0.9817

Summary of Results


Spacing Criteria	0 - 180: 0.44	90 - 270: 0.44	Zone	Lumens	% of Luminaire
Total Lumen Output	2444 LM		0 - 40	2184	85%
Luminaire Efficacy	87 LM/W		0 - 60	2412	94%
Maximum Candela	3580 CD		0 - 80	2528	99%

White Flanged Trim (2700K, 98CRI, 31°-Silver Reflector, 28W)

Polar Plot

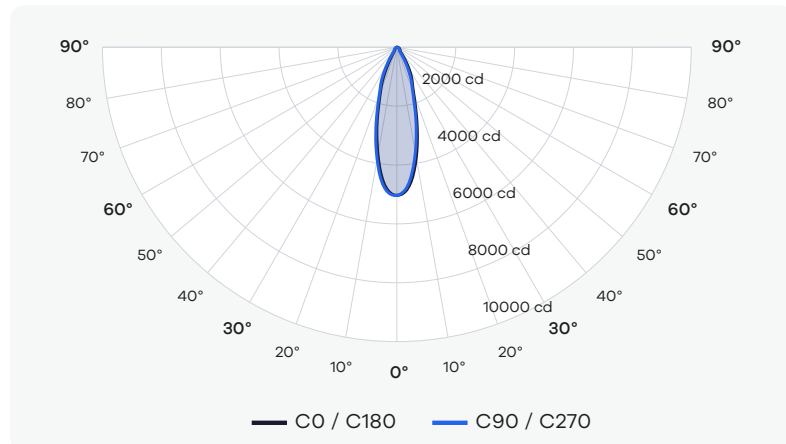

Cone of Light Tabulation

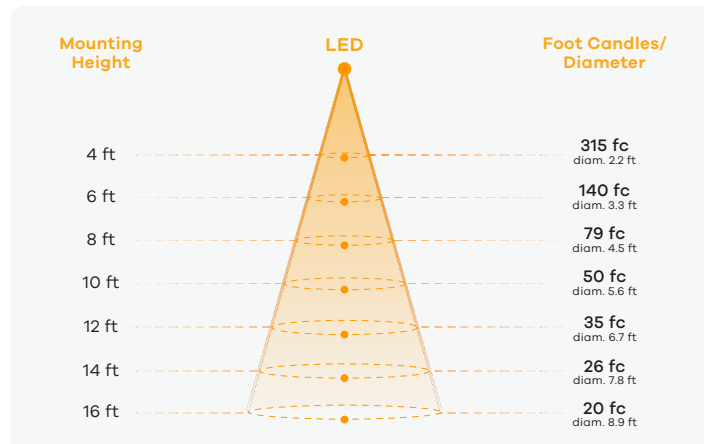

Power Information


Voltage	119.68 V
Current	0.2297 A
Power	27.0 W
Power Factor	0.9815

Summary of Results


Spacing Criteria	0 - 180: 0.28	90 - 270: 0.28	Zone	Lumens	% of Luminaire
Total Lumen Output	2074 LM		0 - 40	1948	82%
Luminaire Efficacy	74 LM/W		0 - 60	2185	92%
Maximum Candela	5032 CD		0 - 80	2347	98%

White Flanged Trim (3000K, 98CRI, 31°-Silver Reflector, 28W)

Polar Plot

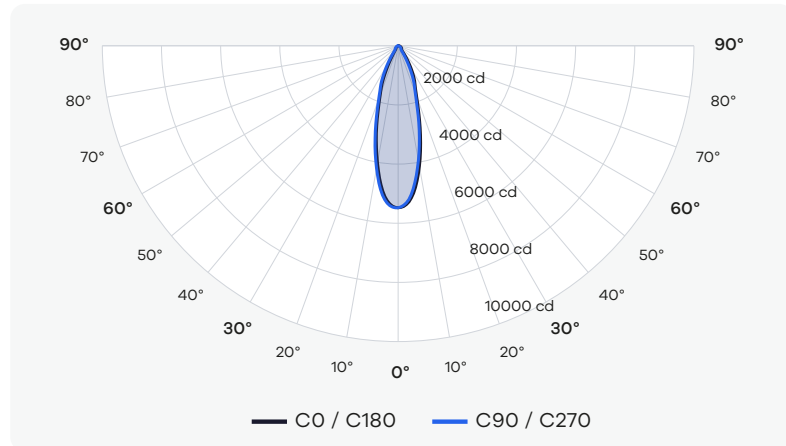

Cone of Light Tabulation

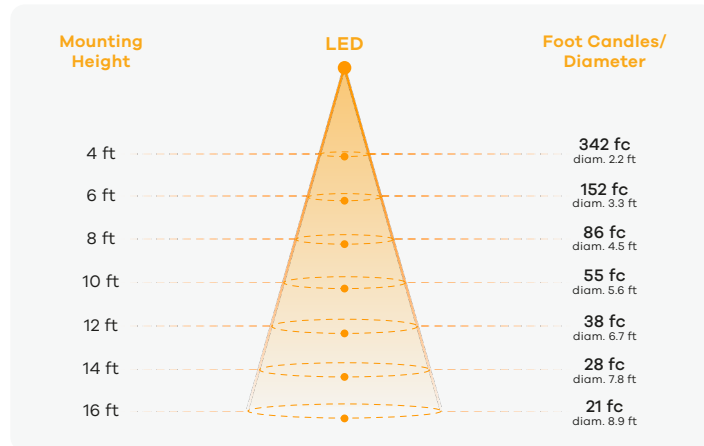

Power Information


Voltage	119.69 V
Current	0.2335 A
Power	27.4 W
Power Factor	0.9821

Summary of Results


Spacing Criteria	0 - 180: 0.28	90 - 270: 0.28	Zone	Lumens	% of Luminaire
Total Lumen Output	2256 LM		0 - 40	2120	82%
Luminaire Efficacy	84 LM/W		0 - 60	2377	92%
Maximun Candela	5476 CD		0 - 80	2553	98%

White Flanged Trim (3500K, 98CRI, 31°-Silver Reflector, 28W)

Polar Plot

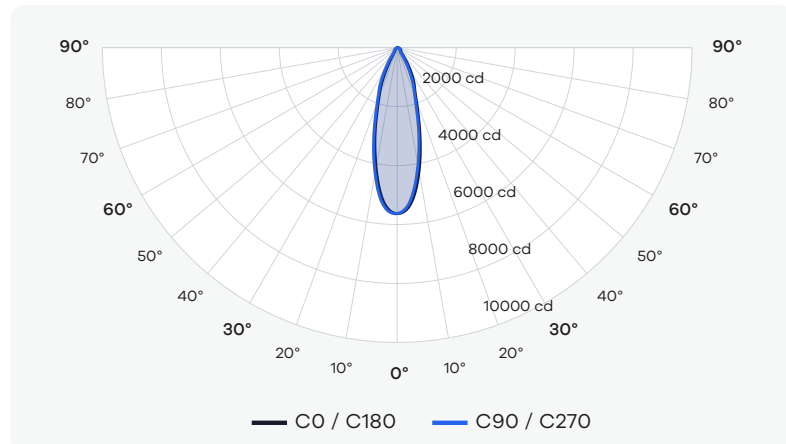

Cone of Light Tabulation

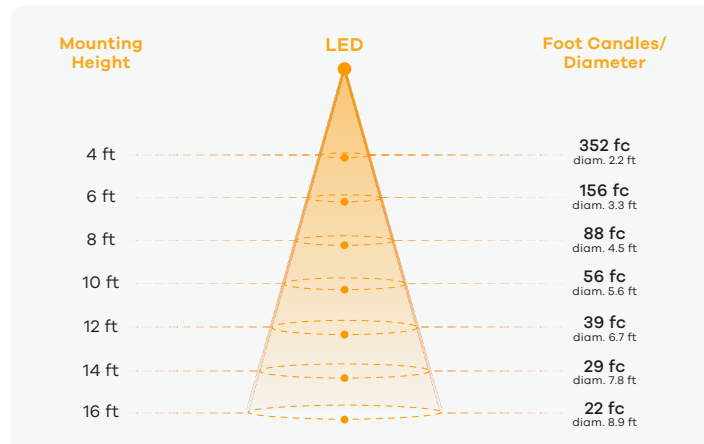

Power Information


Voltage	119.71 V
Current	0.2300 A
Power	27.0 W
Power Factor	0.9817

Summary of Results


Spacing Criteria	0 - 180: 0.28	90 - 270: 0.28	Zone	Lumens	% of Luminaire
Total Lumen Output	2320 LM		0 - 40	2180	82%
Luminaire Efficacy	83 LM/W		0 - 60	2444	92%
Maximun Candela	5630 CD		0 - 80	2625	98%

White Flanged Trim (2700K, 98CRI, 43°-Silver Reflector, 28W)

Polar Plot

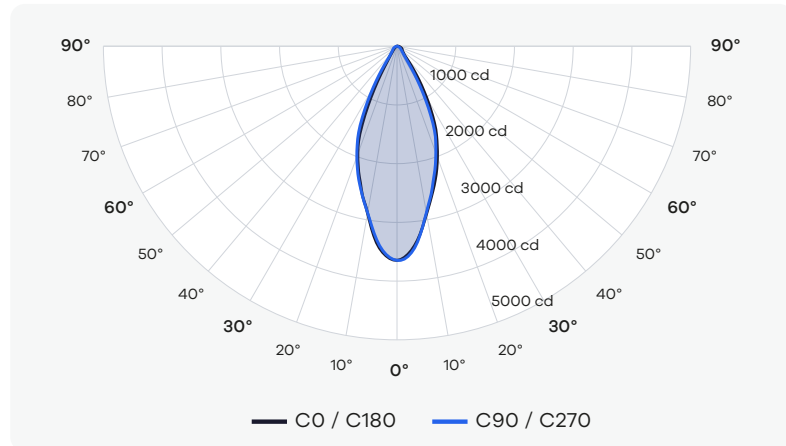

Cone of Light Tabulation

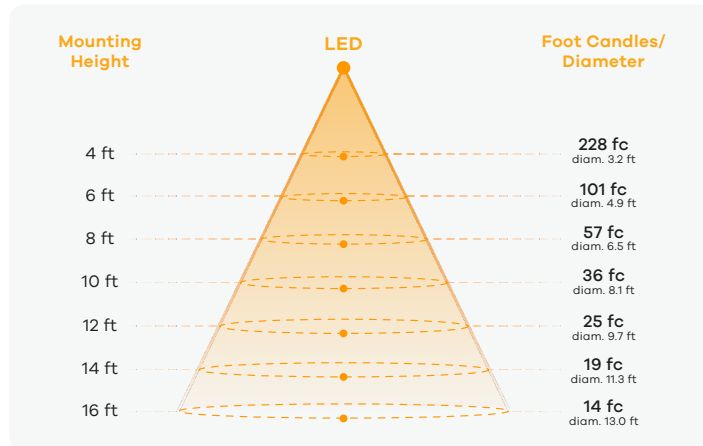

Power Information


Voltage	119.71 V
Current	0.2334 A
Power	27.4 W
Power Factor	0.9821

Summary of Results


Spacing Criteria	0 - 180: 0.4	90 - 270: 0.4	Zone	Lumens	% of Luminaire
Total Lumen Output	2102 LM		0 - 40	2012	84%
Luminaire Efficacy	79 LM/W		0 - 60	2225	92%
Maximum Candela	3647 CD		0 - 80	2371	99%

White Flanged Trim (3000K, 98CRI, 43°-Silver Reflector, 28W)

Polar Plot

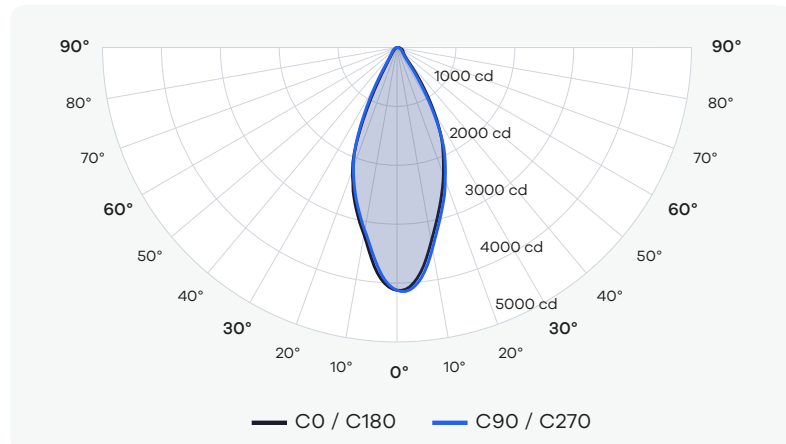

Cone of Light Tabulation

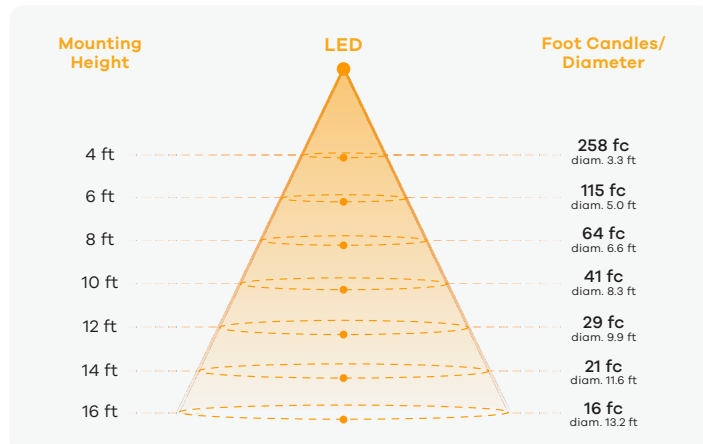

Power Information


Voltage	119.71 V
Current	0.2334 A
Power	27.4 W
Power Factor	0.9821

Summary of Results


Spacing Criteria	0 - 180: 0.41	90 - 270: 0.41	Zone	Lumens	% of Luminaire
Total Lumen Output	2413 LM		0 - 40	2379	83%
Luminaire Efficacy	90 LM/W		0 - 60	2634	92%
Maximum Candela	4123 CD		0 - 80	2808	98%

White Flanged Trim (3500K, 98CRI, 43°-Silver Reflector, 28W)

Polar Plot

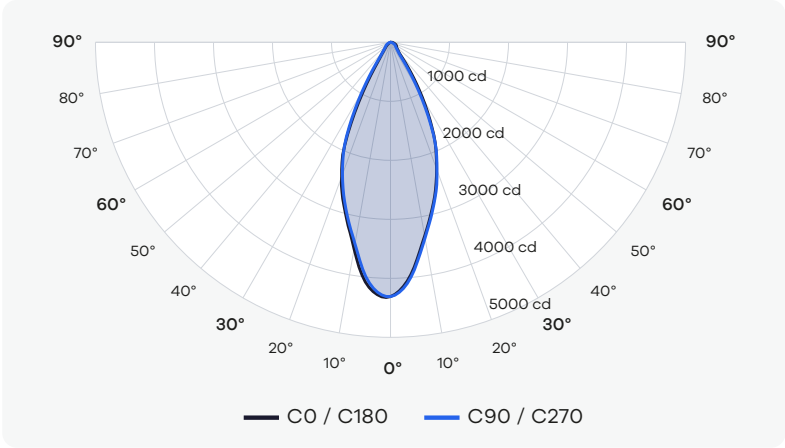

Cone of Light Tabulation

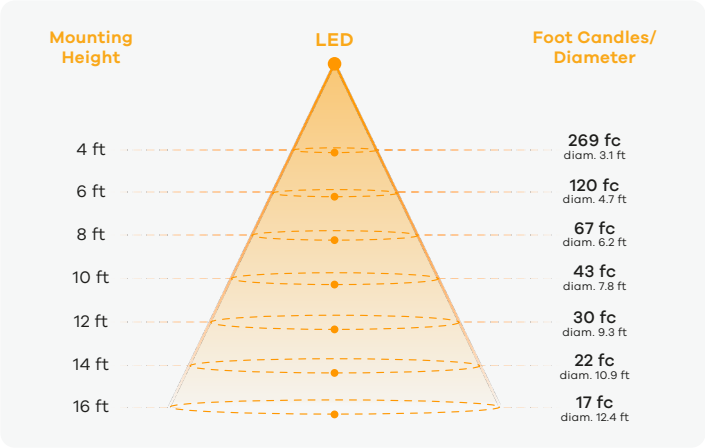

Power Information

Voltage	119.71 V
Current	0.2334 A
Power	27.4 W
Power Factor	0.9821

Summary of Results

Spacing Criteria	0 - 180: 0.39	90 - 270: 0.39	Zone	Lumens	% of Luminaire
Total Lumen Output	2501 LM		0 - 40	2249	83%
Luminaire Efficacy	94 LM/W		0 - 60	2493	92%
Maximun Candela	4309 CD		0 - 80	2659	99%