



White Narrow Trim (2700K, 98CRI, 35°-Clear, 12W)

Polar Plot

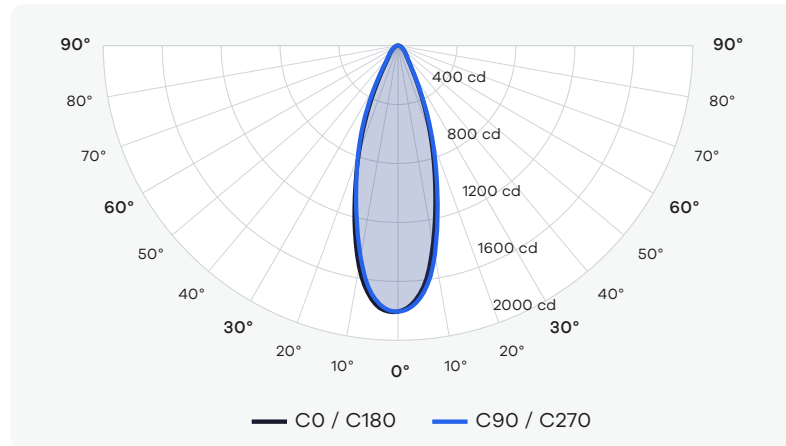

Cone of Light Tabulation

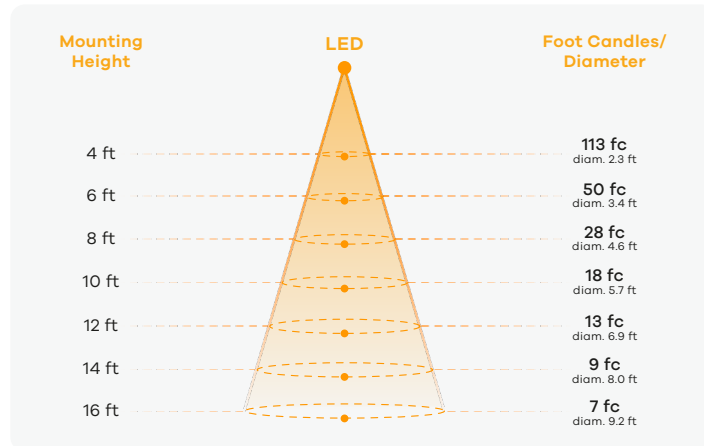

Power Information


Voltage	119.84 V
Current	0.08936 A
Power	10.5 W
Power Factor	0.9776

Summary of Results


Spacing Criteria	0 - 180: 0.29	90 - 270: 0.29	Zone	Lumens	% of Luminaire
Total Lumen Output	896 LM		0 - 40	673	83%
Luminaire Efficacy	75 LM/W		0 - 60	767	94%
Maximum Candela	1805 CD		0 - 80	809	99%

White Narrow Trim (3000K, 98CRI, 35°-Clear, 12W)

Polar Plot

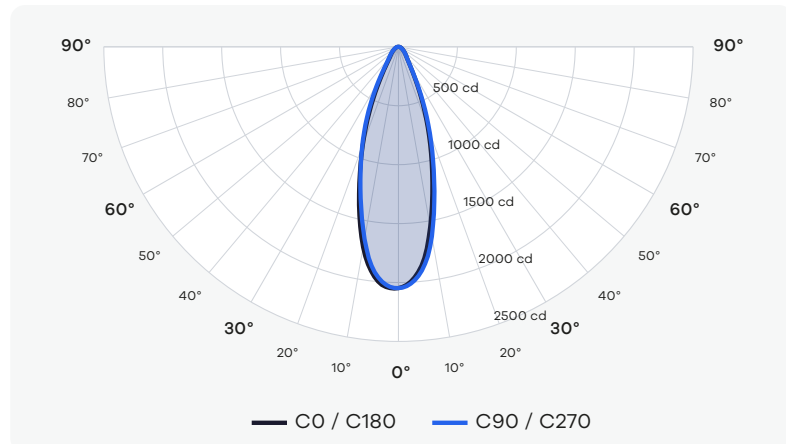

Cone of Light Tabulation

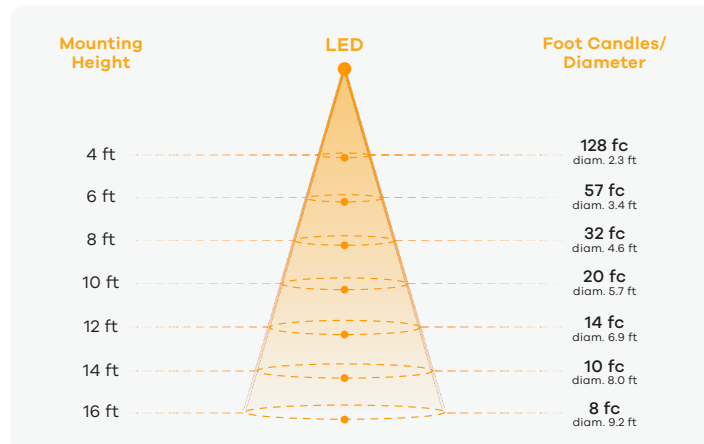

Power Information


Voltage	119.82 V
Current	0.08972 A
Power	10.5 W
Power Factor	0.9779

Summary of Results


Spacing Criteria	0 - 180: 0.29	90 - 270: 0.29	Zone	Lumens	% of Luminaire
Total Lumen Output	1016 LM		0 - 40	763	83%
Luminaire Efficacy	99 LM/W		0 - 60	870	94%
Maximum Candela	2047 CD		0 - 80	918	99%

White Narrow Trim (3500K, 98CRI, 35°-Clear, 12W)

Polar Plot

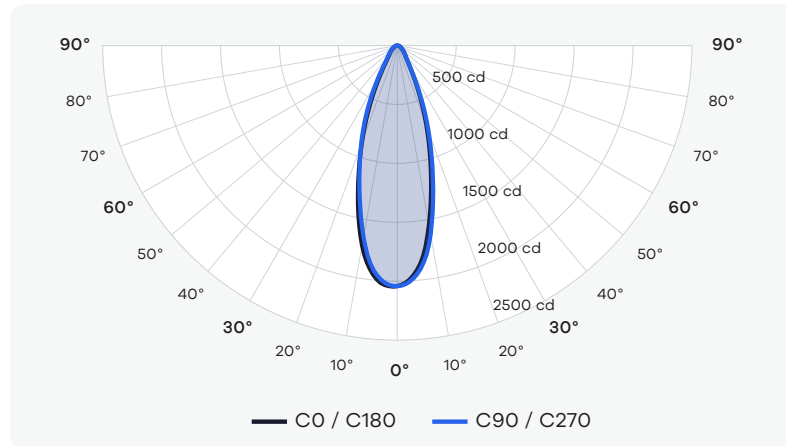

Cone of Light Tabulation

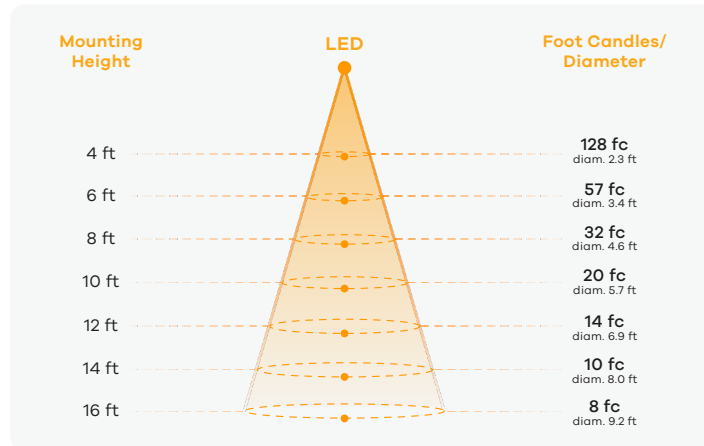

Power Information


Voltage	119.83 V
Current	0.08936 A
Power	10.5 W
Power Factor	0.9778

Summary of Results


Spacing Criteria	0 - 180: 0.29	90 - 270: 0.29	Zone	Lumens	% of Luminaire
Total Lumen Output	1014 LM		0 - 40	761	83%
Luminaire Efficacy	84 LM/W		0 - 60	868	94%
Maximun Candela	2042 CD		0 - 80	916	99%

White Narrow Trim (2700K, 98CRI, 42°-Clear, 12W)

Polar Plot

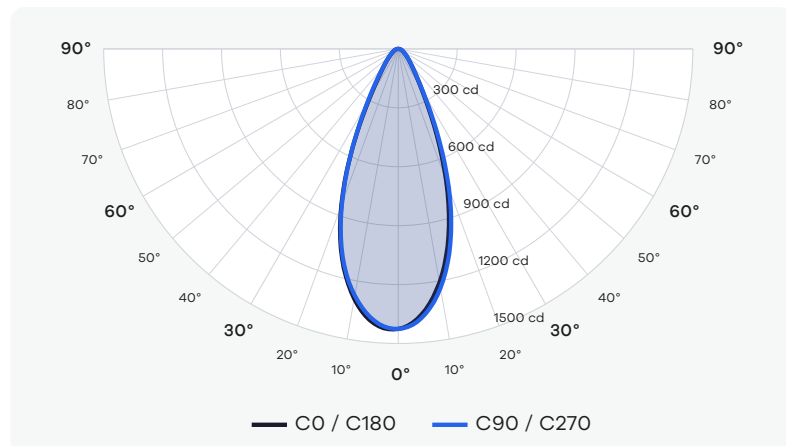

Cone of Light Tabulation

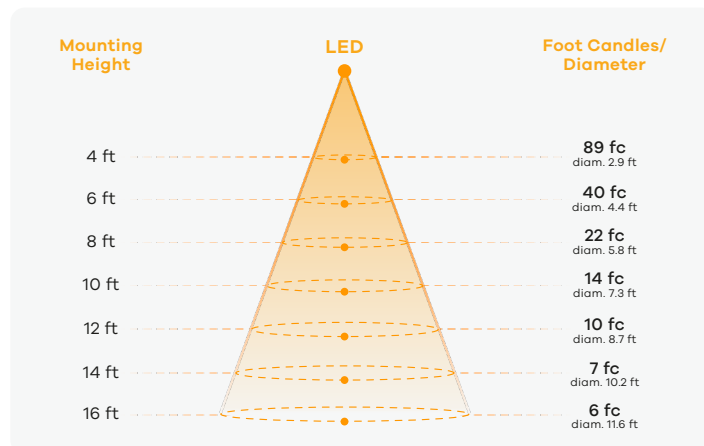

Power Information


Voltage	119.72 V
Current	0.08974 A
Power	10.5 W
Power Factor	0.9776

Summary of Results


Spacing Criteria	0 - 180: 0.36	90 - 270: 0.36	Zone	Lumens	% of Luminaire
Total Lumen Output	893 LM		0 - 40	690	84%
Luminaire Efficacy	74 LM/W		0 - 60	782	95%
Maximun Candela	1426 CD		0 - 80	821	100%

White Narrow Trim (3000K, 98CRI, 42°-Clear, 12W)

Polar Plot

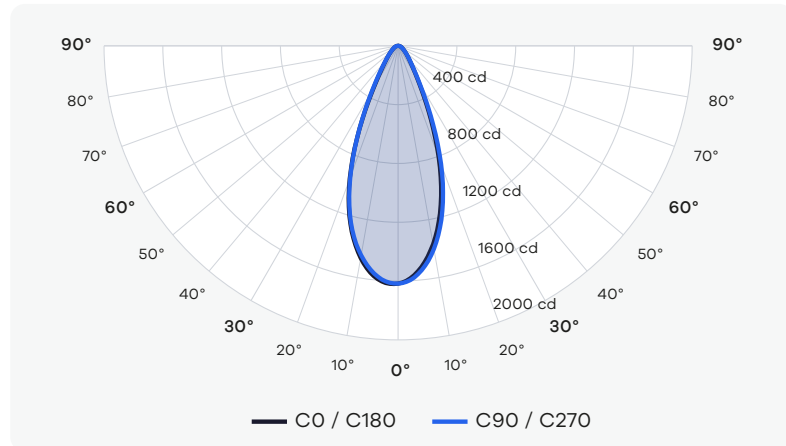

Cone of Light Tabulation

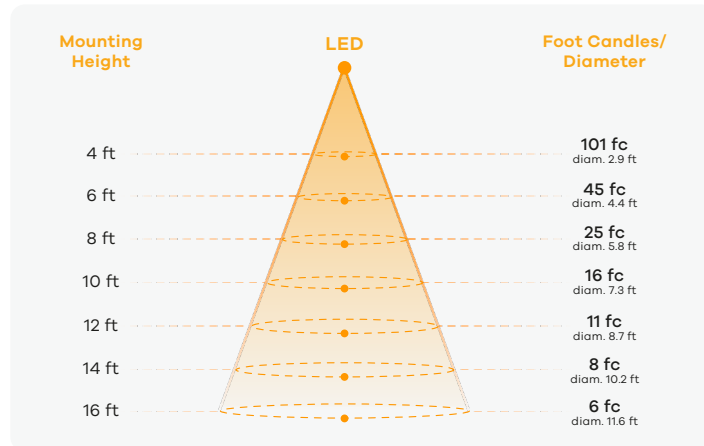

Power Information


Voltage	119.82 V
Current	0.08961 A
Power	10.5 W
Power Factor	0.9779

Summary of Results


Spacing Criteria	0 - 180: 0.36	90 - 270: 0.36	Zone	Lumens	% of Luminaire
Total Lumen Output	1012 LM		0 - 40	782	84%
Luminaire Efficacy	99 LM/W		0 - 60	887	95%
Maximun Candela	1617 CD		0 - 80	931	100%

White Narrow Trim (3500K, 98CRI, 42°-Clear, 12W)

Polar Plot

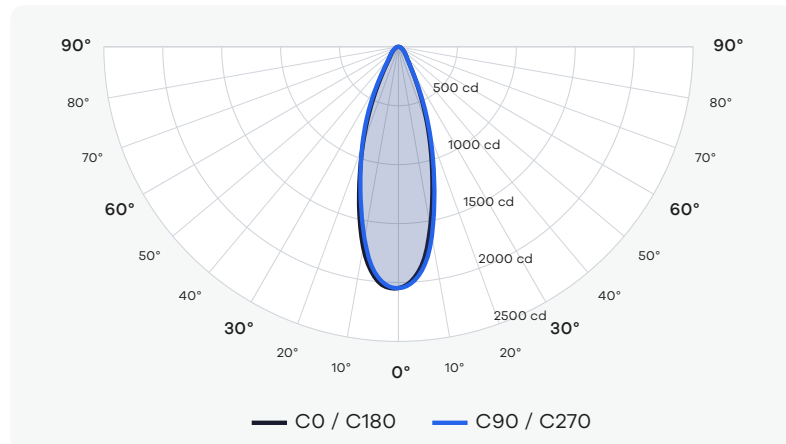

Cone of Light Tabulation

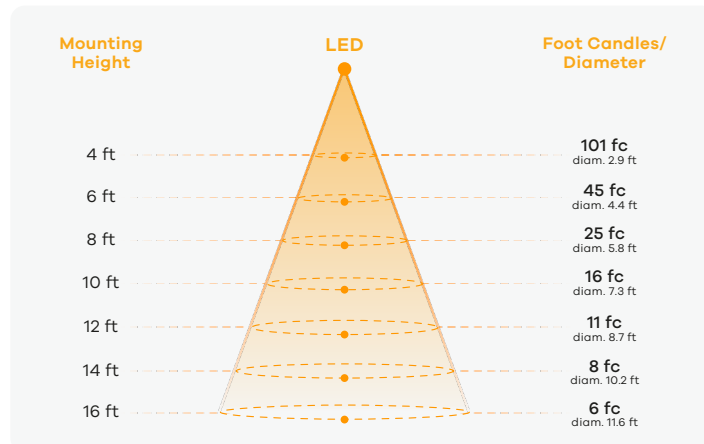

Power Information


Voltage	119.83 V
Current	0.08927 A
Power	10.5 W
Power Factor	0.9778

Summary of Results


Spacing Criteria	0 - 180: 0.36	90 - 270: 0.36	Zone	Lumens	% of Luminaire
Total Lumen Output	1012 LM		0 - 40	782	84%
Luminaire Efficacy	84 LM/W		0 - 60	887	95%
Maximun Candela	1617 CD		0 - 80	931	100%

White Narrow Trim (2700K, 98CRI, 53°-Clear, 12W)

Polar Plot

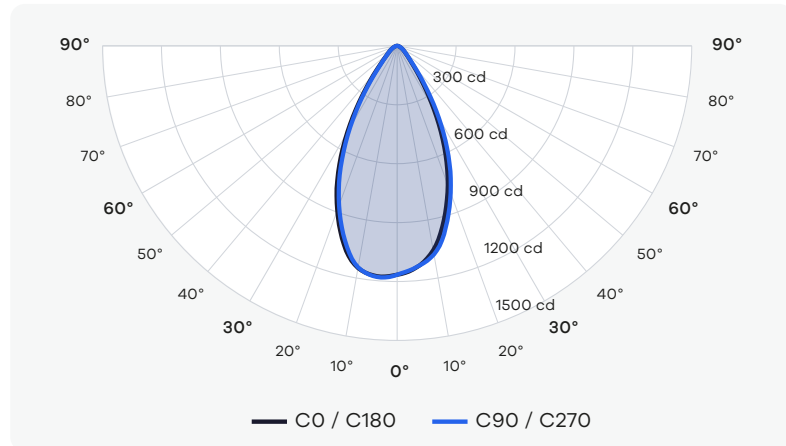

Cone of Light Tabulation

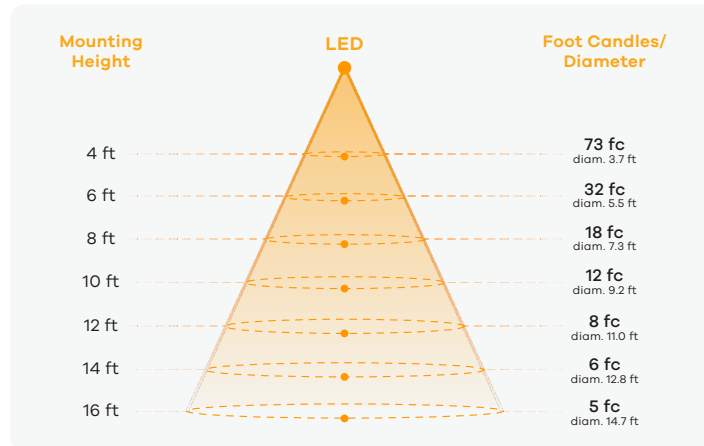

Power Information


Voltage	119.74 V
Current	0.08963 A
Power	10.5 W
Power Factor	0.9776

Summary of Results


Spacing Criteria	0 - 180: 0.46	90 - 270: 0.46	Zone	Lumens	% of Luminaire
Total Lumen Output	986 LM		0 - 40	757	86%
Luminaire Efficacy	82 LM/W		0 - 60	852	96%
Maximun Candela	1165 CD		0 - 80	881	100%

White Narrow Trim (3000K, 98CRI, 53°-Clear, 12W)

Polar Plot

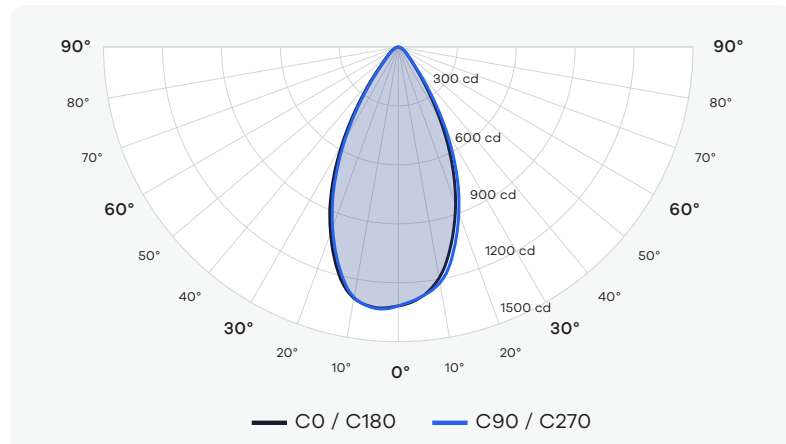

Cone of Light Tabulation

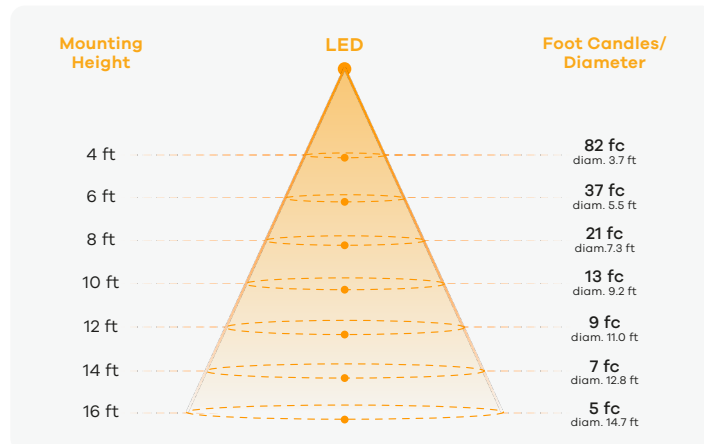

Power Information


Voltage	119.83 V
Current	0.08950 A
Power	10.5 W
Power Factor	0.9779

Summary of Results


Spacing Criteria	0 - 180: 0.46	90 - 270: 0.46	Zone	Lumens	% of Luminaire
Total Lumen Output	1115 LM		0 - 40	856	86%
Luminaire Efficacy	109 LM/W		0 - 60	964	96%
Maximun Candela	1318 CD		0 - 80	997	100%

White Narrow Trim (3500K, 98CRI, 53°-Clear, 12W)

Polar Plot

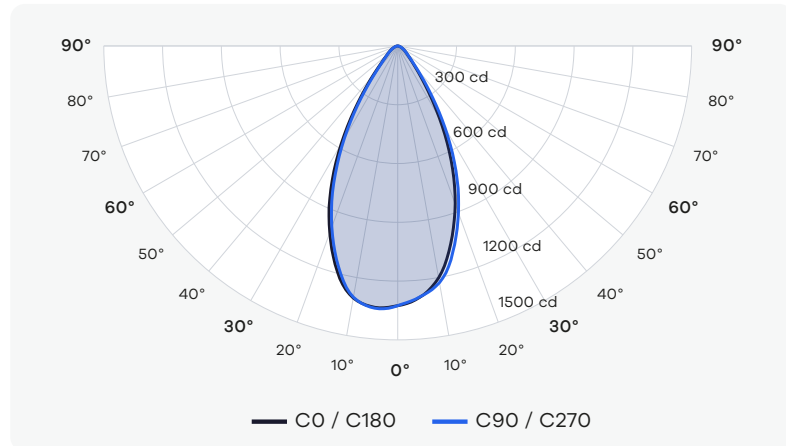

Cone of Light Tabulation

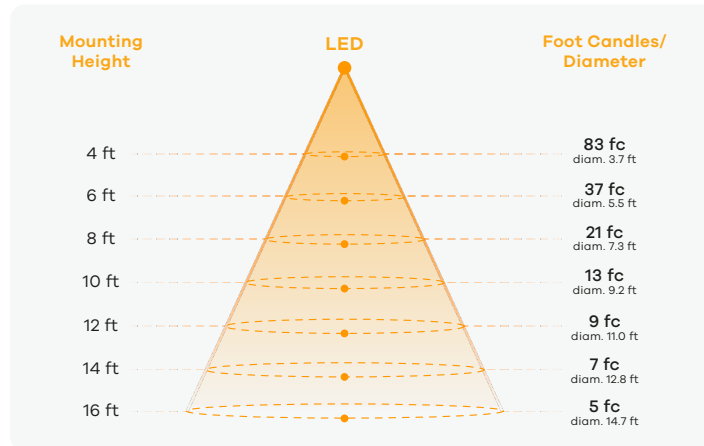

Power Information


Voltage	119.83 V
Current	0.08934 A
Power	10.5 W
Power Factor	0.9778

Summary of Results


Spacing Criteria	0 - 180: 0.46	90 - 270: 0.46	Zone	Lumens	% of Luminaire
Total Lumen Output	1122 LM		0 - 40	860	86%
Luminaire Efficacy	93 LM/W		0 - 60	969	96%
Maximun Candela	1325 CD		0 - 80	1002	100%

White Narrow Trim (2700K, 98CRI, 33°-Silver Reflector, 12W)

Polar Plot

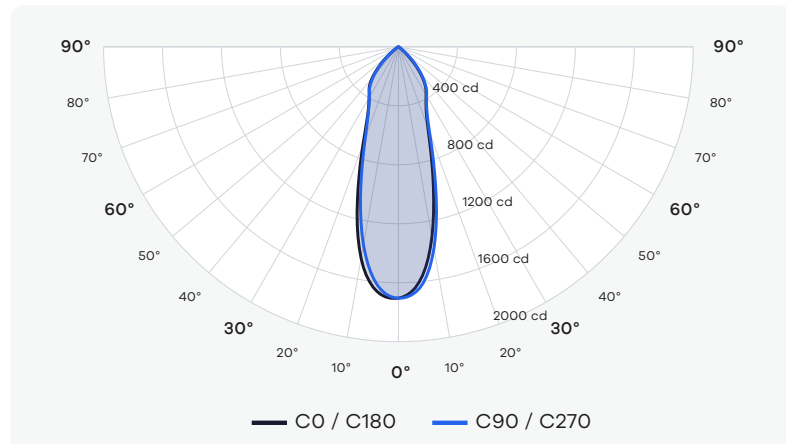

Cone of Light Tabulation

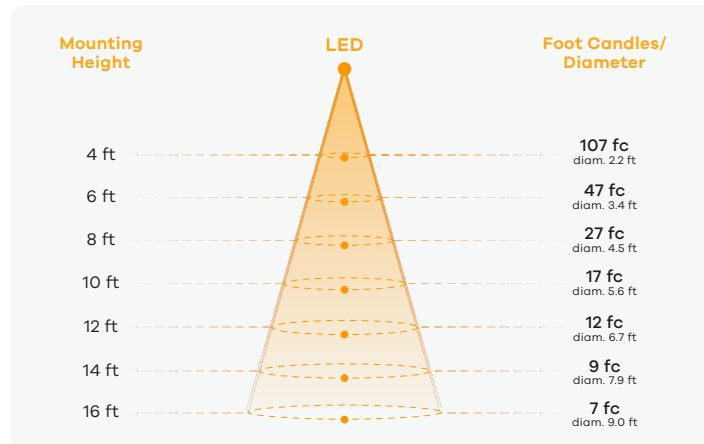

Power Information


Voltage	119.74 V
Current	0.08953 A
Power	10.5 W
Power Factor	0.9776

Summary of Results


Spacing Criteria	0 - 180: 0.28	90 - 270: 0.28	Zone	Lumens	% of Luminaire
Total Lumen Output	1001 LM		0 - 40	794	86%
Luminaire Efficacy	83 LM/W		0 - 60	913	99%
Maximun Candela	1705 CD		0 - 80	921	100%

White Narrow Trim (3000K, 98CRI, 33°-Silver Reflector, 12W)

Polar Plot

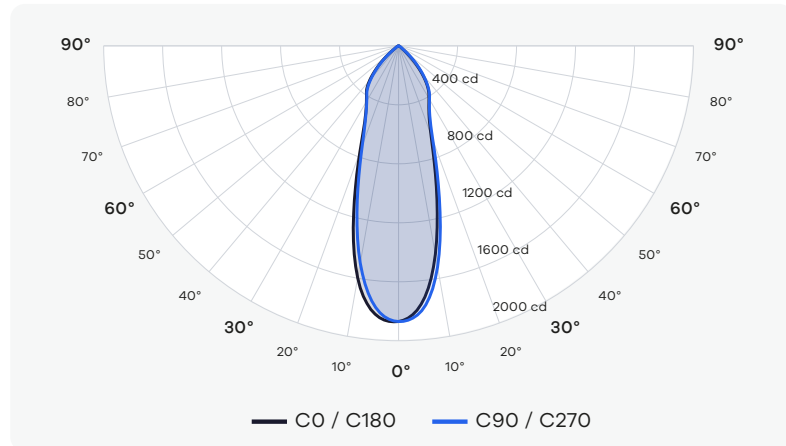

Cone of Light Tabulation

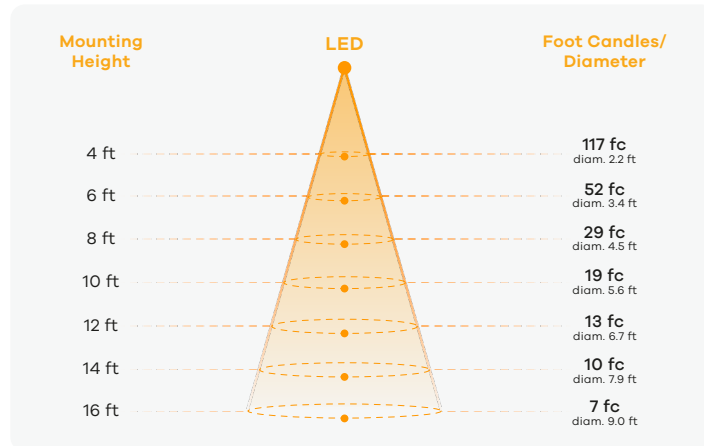

Power Information


Voltage	119.83 V
Current	0.08949 A
Power	10.5 W
Power Factor	0.9779

Summary of Results


Spacing Criteria	0 - 180: 0.28	90 - 270: 0.28	Zone	Lumens	% of Luminaire
Total Lumen Output	1098 LM		0 - 40	870	86%
Luminaire Efficacy	107 LM/W		0 - 60	1001	99%
Maximun Candela	1870 CD		0 - 80	1010	100%

White Narrow Trim (3500K, 98CRI, 33°-Silver Reflector, 12W)

Polar Plot

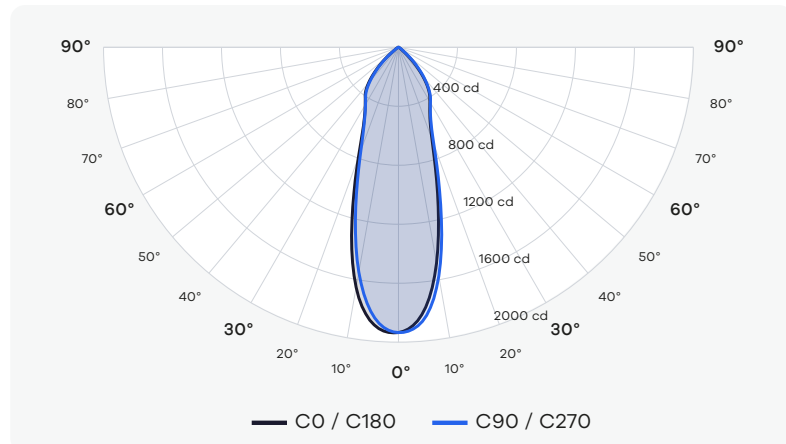

Cone of Light Tabulation

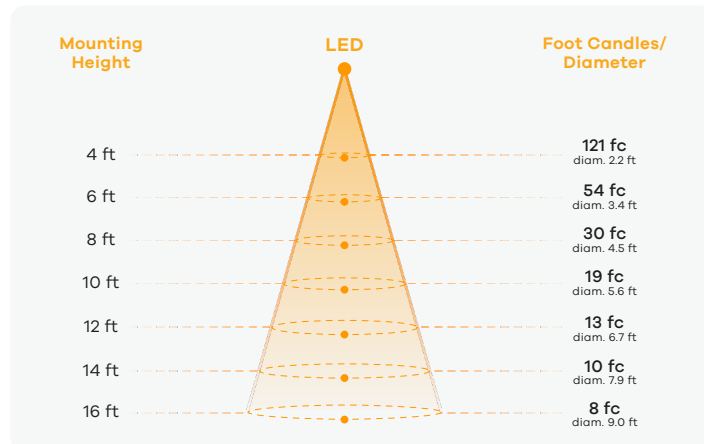

Power Information


Voltage	119.82 V
Current	0.08925 A
Power	10.5 W
Power Factor	0.9778

Summary of Results


Spacing Criteria	0 - 180: 0.28	90 - 270: 0.28	Zone	Lumens	% of Luminaire
Total Lumen Output	1136 LM		0 - 40	901	86%
Luminaire Efficacy	95 LM/W		0 - 60	1036	99%
Maximun Candela	1935 CD		0 - 80	1045	100%

White Narrow Trim (2700K, 98CRI, 54°-Silver Reflector, 12W)

Polar Plot

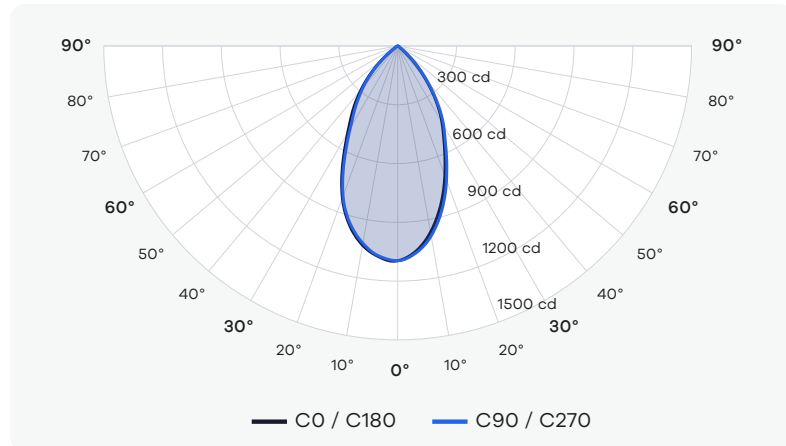

Cone of Light Tabulation

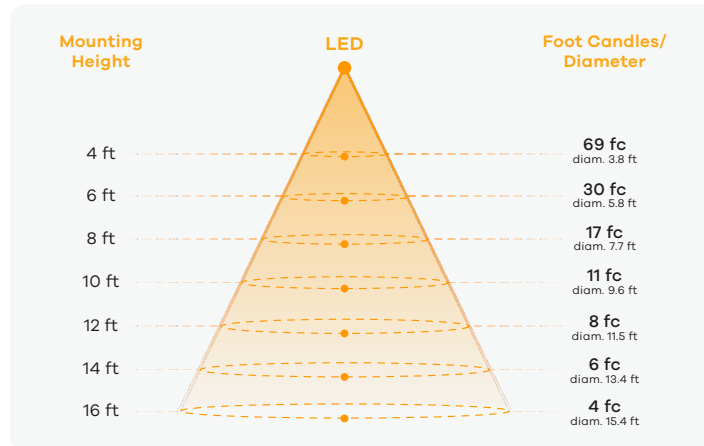

Power Information


Voltage	119.74 V
Current	0.08949 A
Power	10.5 W
Power Factor	0.9776

Summary of Results


Spacing Criteria	0 - 180: 0.48	90 - 270: 0.48	Zone	Lumens	% of Luminaire
Total Lumen Output	1007 LM		0 - 40	803	87%
Luminaire Efficacy	84 LM/W		0 - 60	914	99%
Maximun Candela	1096 CD		0 - 80	919	100%

White Narrow Trim (3000K, 98CRI, 54°-Silver Reflector, 12W)

Polar Plot

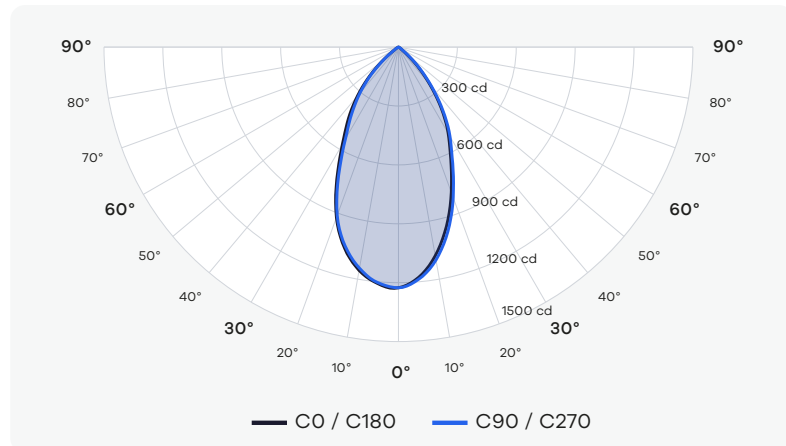

Cone of Light Tabulation

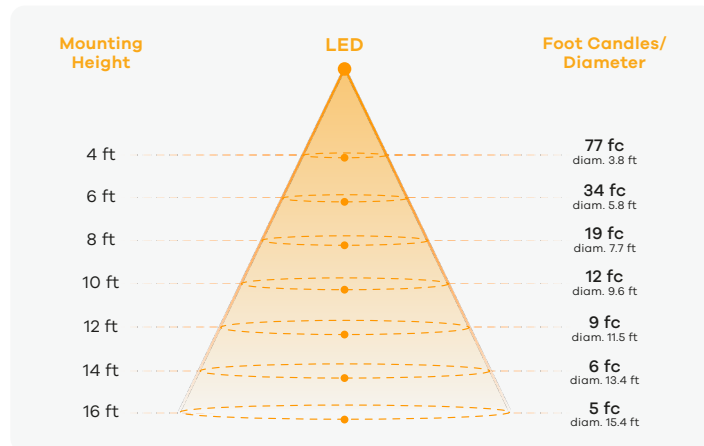

Power Information


Voltage	119.83 V
Current	0.08948 A
Power	10.5 W
Power Factor	0.9779

Summary of Results


Spacing Criteria	0 - 180: 0.48	90 - 270: 0.48	Zone	Lumens	% of Luminaire
Total Lumen Output	1127 LM		0 - 40	898	87%
Luminaire Efficacy	110 LM/W		0 - 60	1022	99%
Maximun Candela	1226 CD		0 - 80	1028	100%

White Narrow Trim (3500K, 98CRI, 54°-Silver Reflector, 12W)

Polar Plot

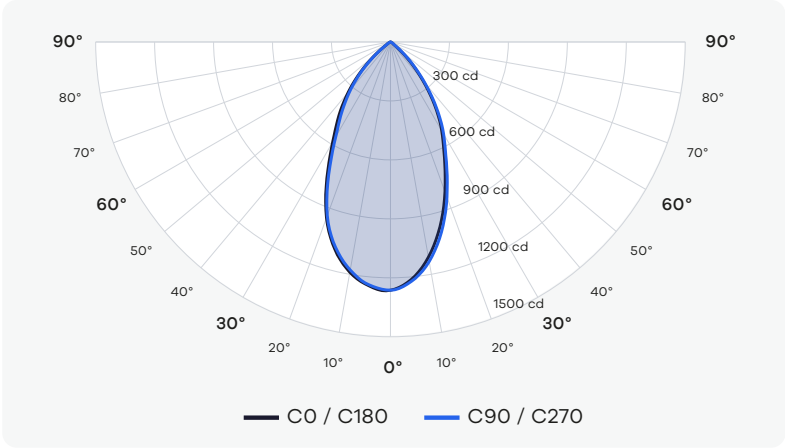

Cone of Light Tabulation

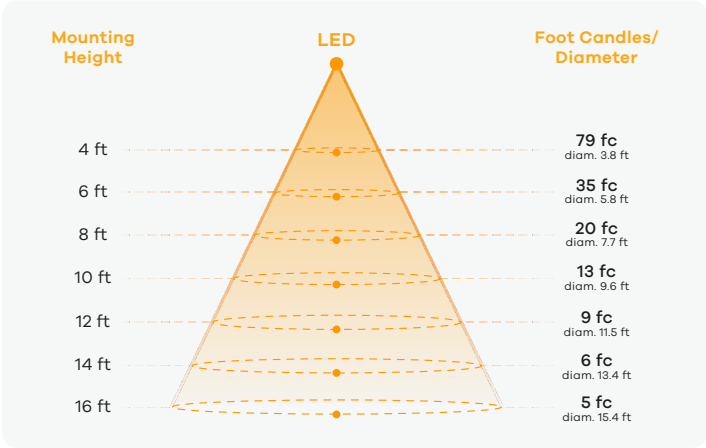

Power Information

Voltage	119.84 V
Current	0.08916 A
Power	10.4 W
Power Factor	0.9778

Summary of Results

Spacing Criteria	0 - 180: 0.48	90 - 270: 0.48	Zone	Lumens	% of Luminaire
Total Lumen Output	1161 LM		0 - 40	925	87%
Luminaire Efficacy	97 LM/W		0 - 60	1053	99%
Maximun Candela	1263 CD		0 - 80	1060	100%