



White Narrow Trim (2700K, 98CRI, 35°-Clear, 15W)

Polar Plot

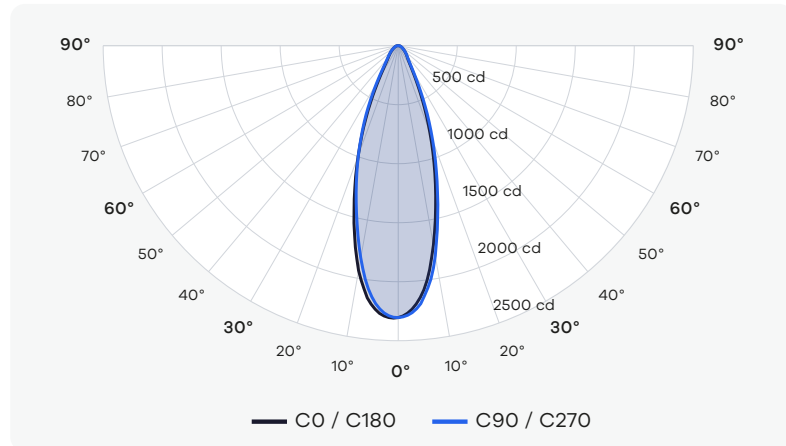

Cone of Light Tabulation

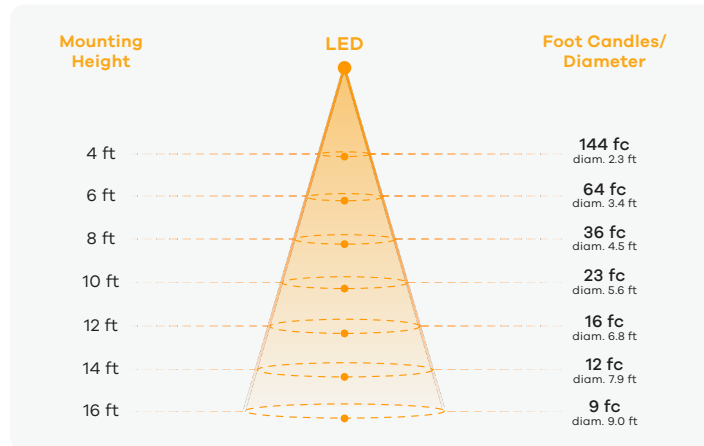

Power Information


Voltage	119.73 V
Current	0.1164 A
Power	13.6 W
Power Factor	0.9781

Summary of Results


Spacing Criteria	0 - 180: 0.28	90 - 270: 0.28	Zone	Lumens	% of Luminaire
Total Lumen Output	1129 LM		0 - 40	830	82%
Luminaire Efficacy	75 LM/W		0 - 60	949	94%
Maximum Candela	2304 CD		0 - 80	1002	99%

White Narrow Trim (3000K, 98CRI, 35°-Clear, 15W)

Polar Plot

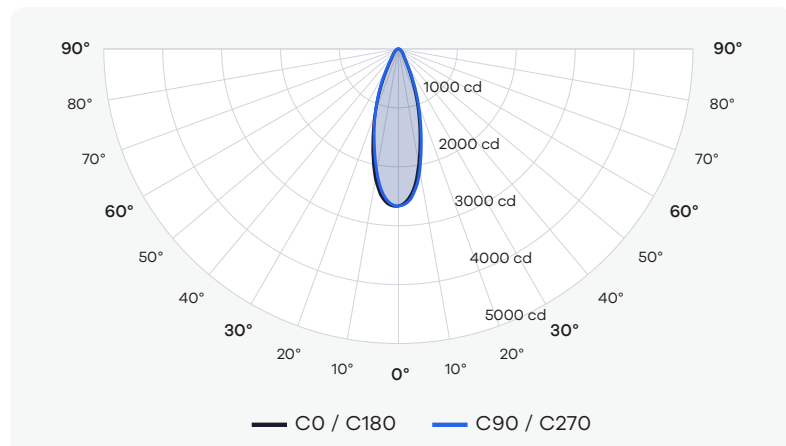

Cone of Light Tabulation

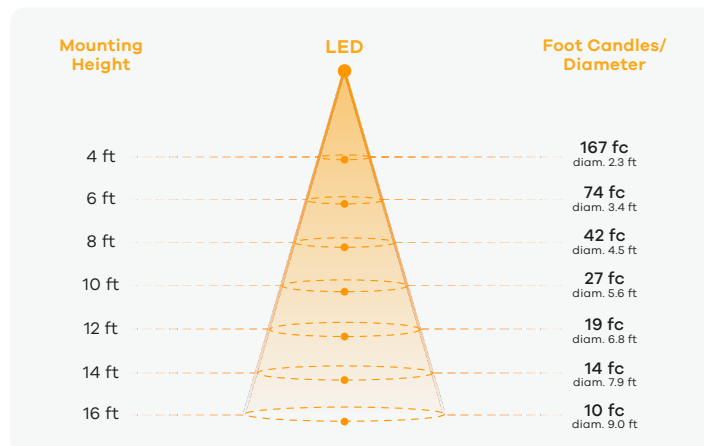

Power Information


Voltage	119.78 V
Current	0.1175 A
Power	13.8 W
Power Factor	0.9785

Summary of Results


Spacing Criteria	0 - 180: 0.28	90 - 270: 0.28	Zone	Lumens	% of Luminaire
Total Lumen Output	1306 LM		0 - 40	961	82%
Luminaire Efficacy	98 LM/W		0 - 60	1098	94%
Maximum Candela	2666 CD		0 - 80	1160	99%

White Narrow Trim (3500K, 98CRI, 35°-Clear, 15W)

Polar Plot

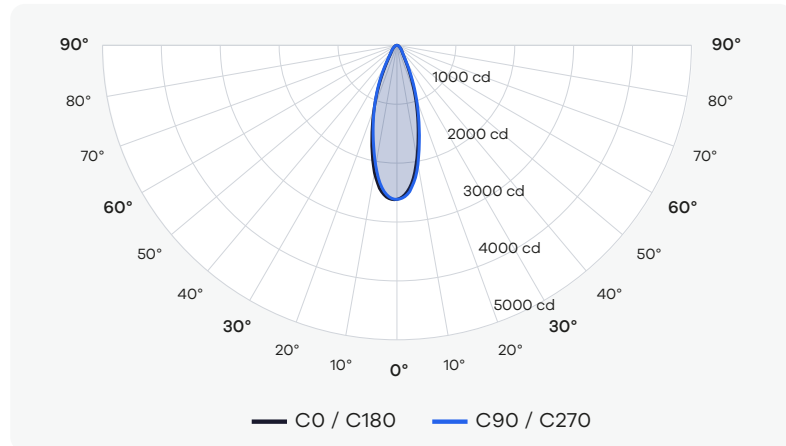

Cone of Light Tabulation

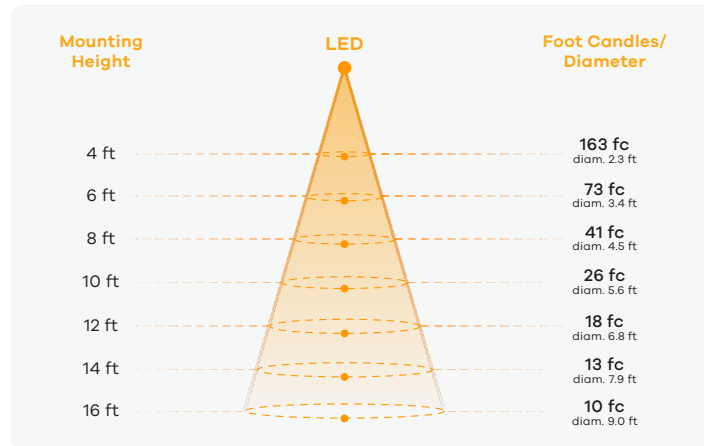

Power Information


Voltage	119.79 V
Current	0.1167 A
Power	13.7 W
Power Factor	0.9781

Summary of Results


Spacing Criteria	0 - 180: 0.28	90 - 270: 0.28	Zone	Lumens	% of Luminaire
Total Lumen Output	1282 LM		0 - 40	943	82%
Luminaire Efficacy	85 LM/W		0 - 60	1077	94%
Maximun Candela	2616 CD		0 - 80	1138	99%

White Narrow Trim (2700K, 98CRI, 42°-Clear, 15W)

Polar Plot

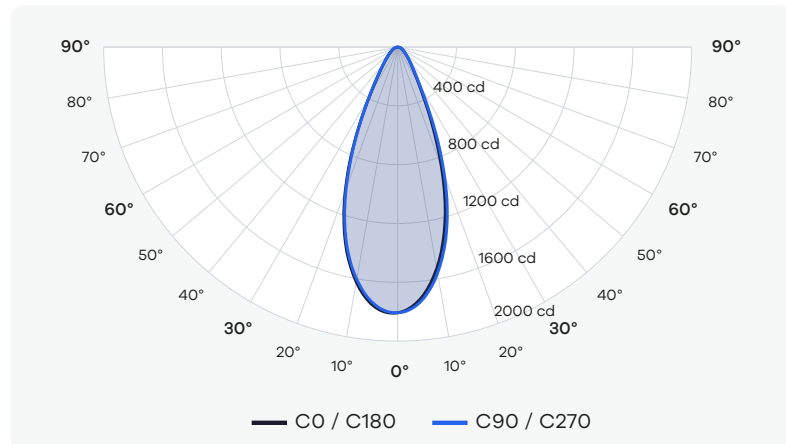

Cone of Light Tabulation

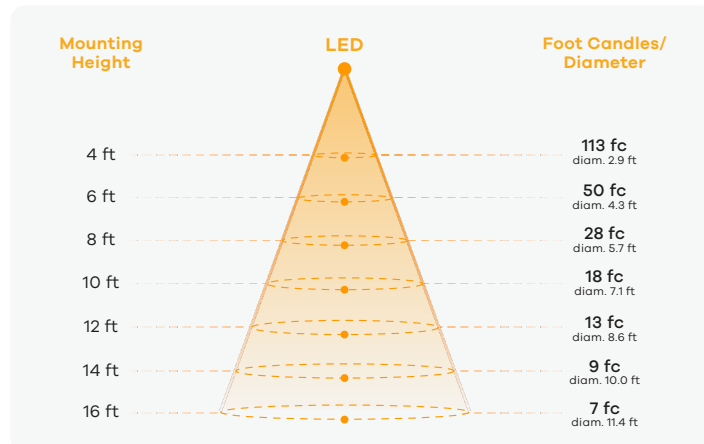

Power Information


Voltage	119.71 V
Current	0.1166 A
Power	13.7 W
Power Factor	0.9781

Summary of Results


Spacing Criteria	0 - 180: 0.36	90 - 270: 0.36	Zone	Lumens	% of Luminaire
Total Lumen Output	1123 LM		0 - 40	853	83%
Luminaire Efficacy	75 LM/W		0 - 60	973	94%
Maximun Candela	1807 CD		0 - 80	1026	100%

White Narrow Trim (3000K, 98CRI, 42°-Clear, 15W)

Polar Plot

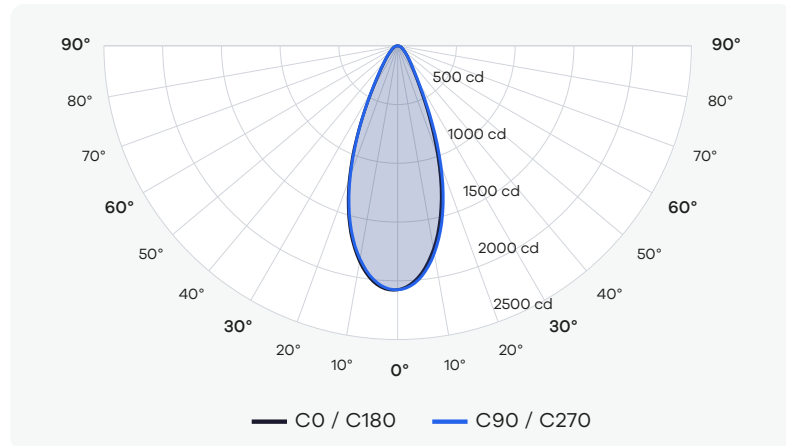

Cone of Light Tabulation

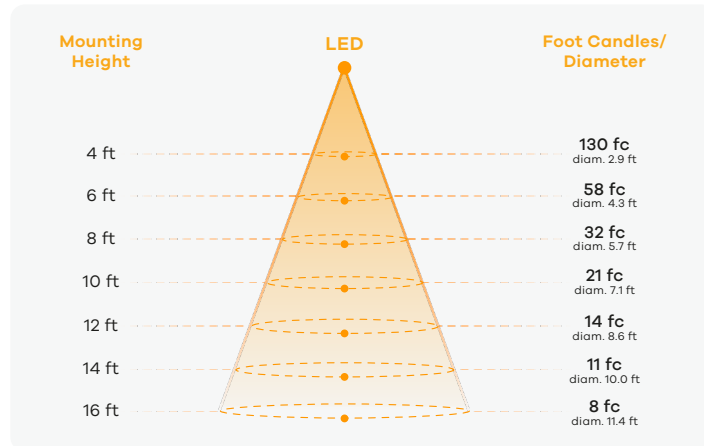

Power Information


Voltage	119.78 V
Current	0.1173 A
Power	13.8 W
Power Factor	0.9784

Summary of Results


Spacing Criteria	0 - 180: 0.36	90 - 270: 0.36	Zone	Lumens	% of Luminaire
Total Lumen Output	1290 LM		0 - 40	980	83%
Luminaire Efficacy	97 LM/W		0 - 60	1118	94%
Maximum Candela	2076 CD		0 - 80	1179	100%

White Narrow Trim (3500K, 98CRI, 42°-Clear, 15W)

Polar Plot

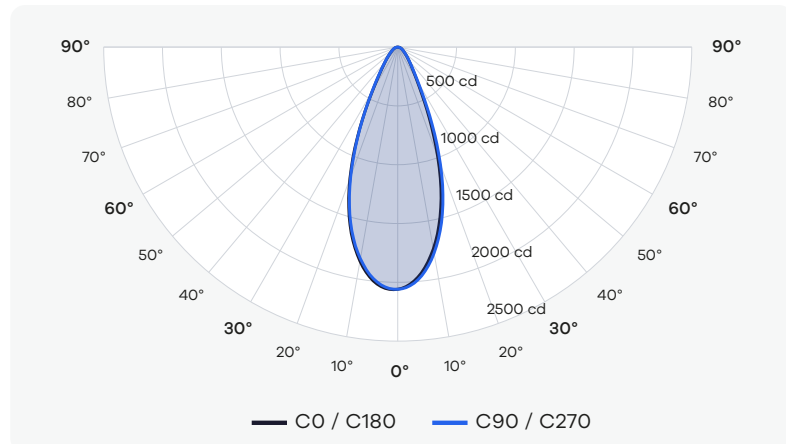

Cone of Light Tabulation

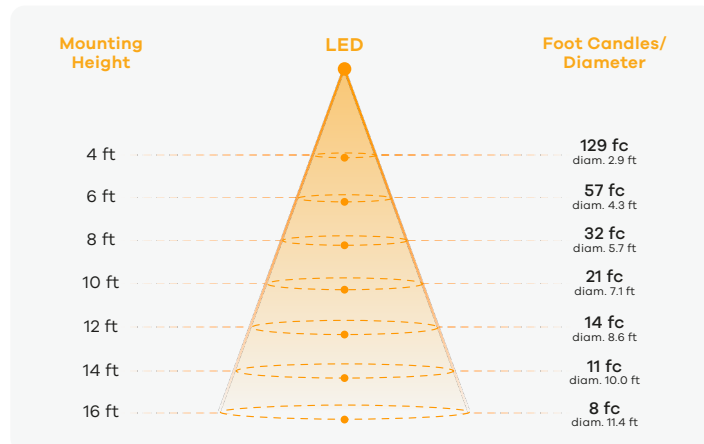

Power Information


Voltage	119.80 V
Current	0.1167 A
Power	13.7 W
Power Factor	0.9781

Summary of Results


Spacing Criteria	0 - 180: 0.36	90 - 270: 0.36	Zone	Lumens	% of Luminaire
Total Lumen Output	1280 LM		0 - 40	972	83%
Luminaire Efficacy	85 LM/W		0 - 60	1109	94%
Maximum Candela	2059 CD		0 - 80	1169	100%

White Narrow Trim (2700K, 98CRI, 53°-Clear, 15W)

Polar Plot

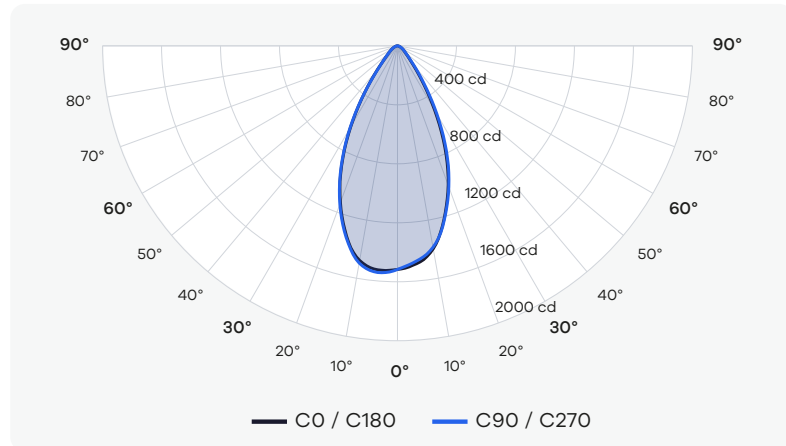

Cone of Light Tabulation

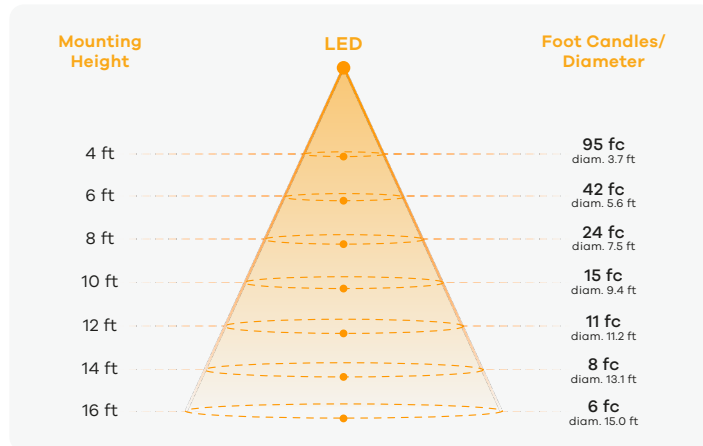

Power Information


Voltage	119.71 V
Current	0.1167 A
Power	13.7 W
Power Factor	0.9781

Summary of Results


Spacing Criteria	0 - 180: 0.47	90 - 270: 0.47	Zone	Lumens	% of Luminaire
Total Lumen Output	1286 LM		0 - 40	1009	86%
Luminaire Efficacy	86 LM/W		0 - 60	1132	97%
Maximun Candela	1516 CD		0 - 80	1170	100%

White Narrow Trim (3000K, 98CRI, 53°-Clear, 15W)

Polar Plot

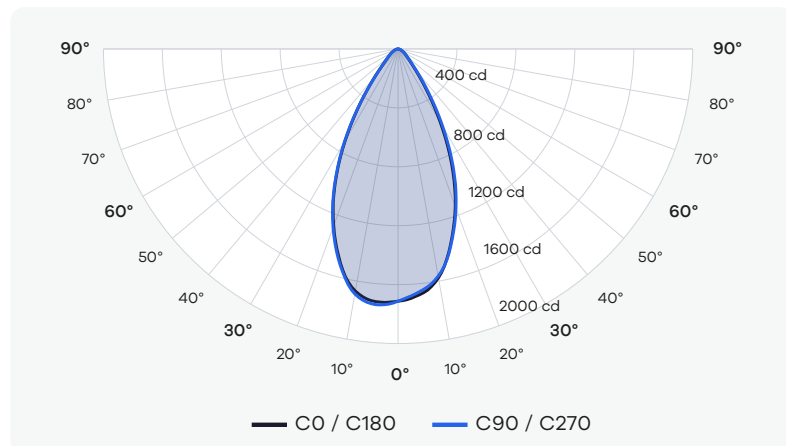

Cone of Light Tabulation

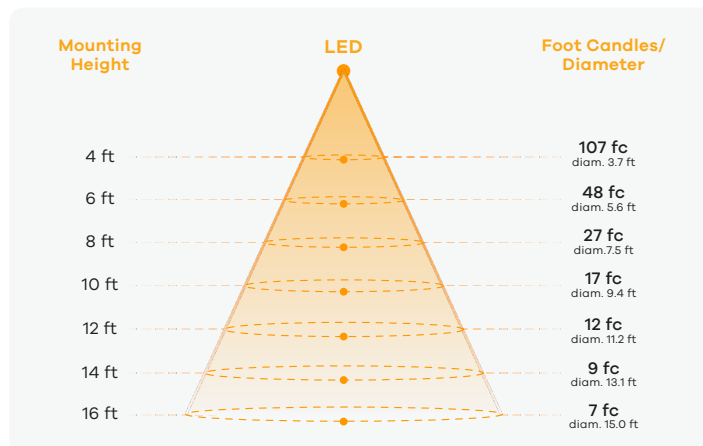

Power Information


Voltage	119.78 V
Current	0.1173 A
Power	13.8 W
Power Factor	0.9784

Summary of Results


Spacing Criteria	0 - 180: 0.47	90 - 270: 0.47	Zone	Lumens	% of Luminaire
Total Lumen Output	1452 LM		0 - 40	1139	86%
Luminaire Efficacy	109 LM/W		0 - 60	1279	97%
Maximun Candela	1712 CD		0 - 80	1322	100%

White Narrow Trim (3500K, 98CRI, 53°-Clear, 15W)

Polar Plot

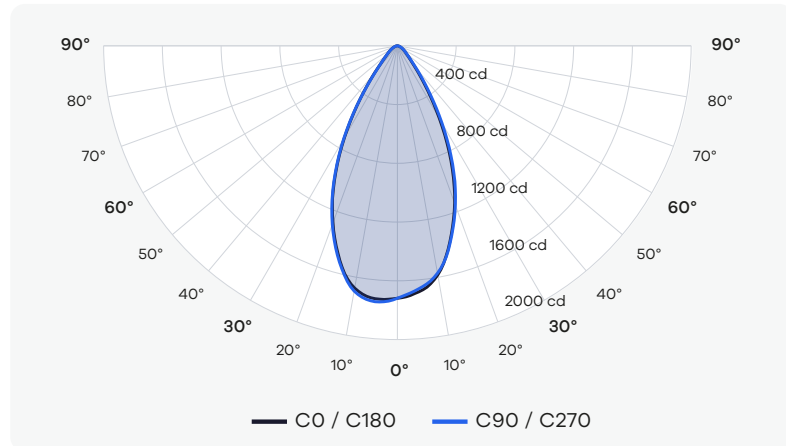

Cone of Light Tabulation

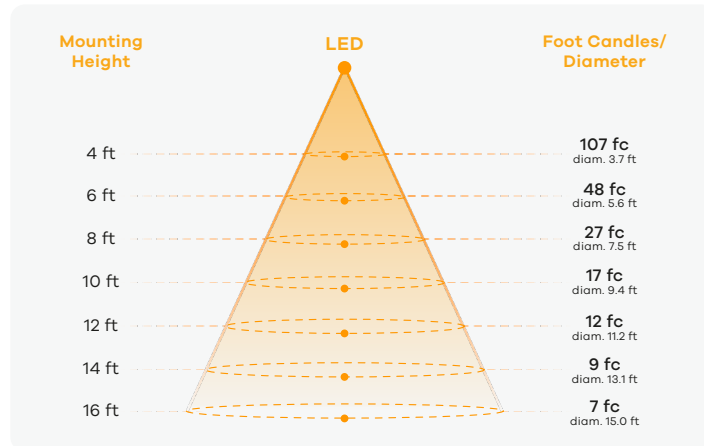

Power Information


Voltage	119.78 V
Current	0.1168 A
Power	13.7 W
Power Factor	0.9781

Summary of Results


Spacing Criteria	0 - 180: 0.47	90 - 270: 0.47	Zone	Lumens	% of Luminaire
Total Lumen Output	1458 LM		0 - 40	1144	86%
Luminaire Efficacy	97 LM/W		0 - 60	1283	97%
Maximum Candela	1719 CD		0 - 80	1326	100%

White Narrow Trim (2700K, 98CRI, 33°-Silver Reflector, 15W)

Polar Plot

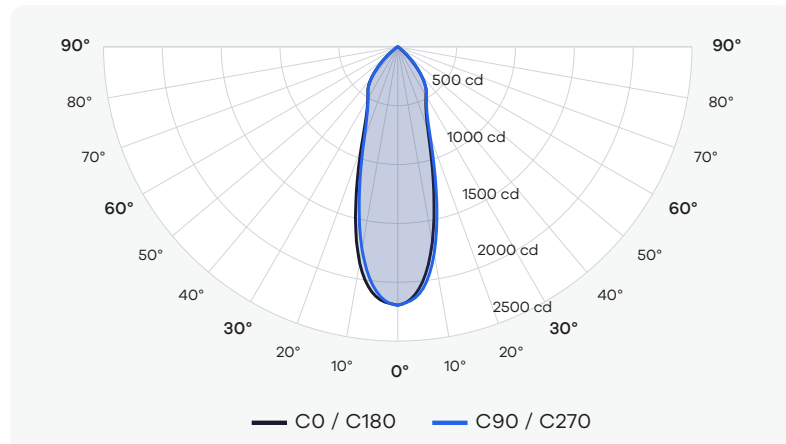

Cone of Light Tabulation

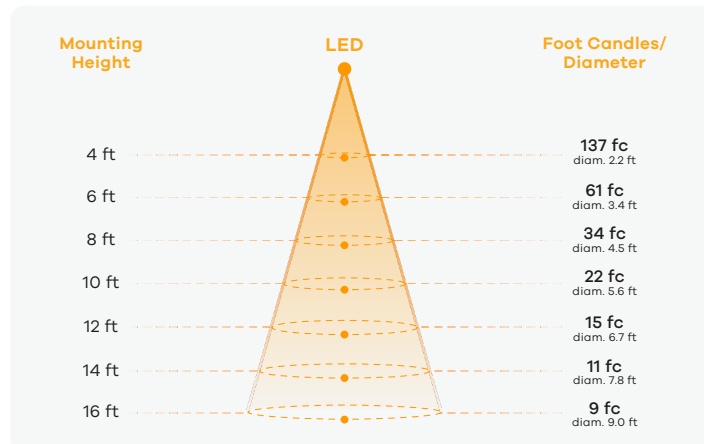

Power Information


Voltage	119.72 V
Current	0.1168 A
Power	13.7 W
Power Factor	0.9781

Summary of Results


Spacing Criteria	0 - 180: 0.28	90 - 270: 0.28	Zone	Lumens	% of Luminaire
Total Lumen Output	1292 LM		0 - 40	1021	85%
Luminaire Efficacy	86 LM/W		0 - 60	1180	99%
Maximum Candela	2196 CD		0 - 80	1191	100%

White Narrow Trim (3000K, 98CRI, 33°-Silver Reflector, 15W)

Polar Plot

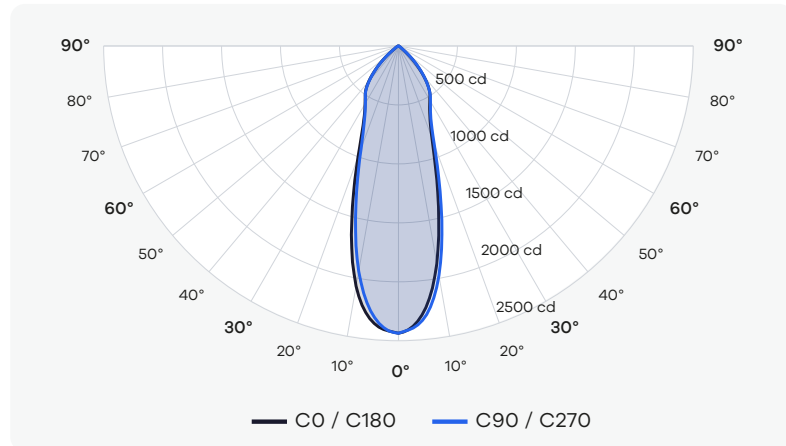

Cone of Light Tabulation

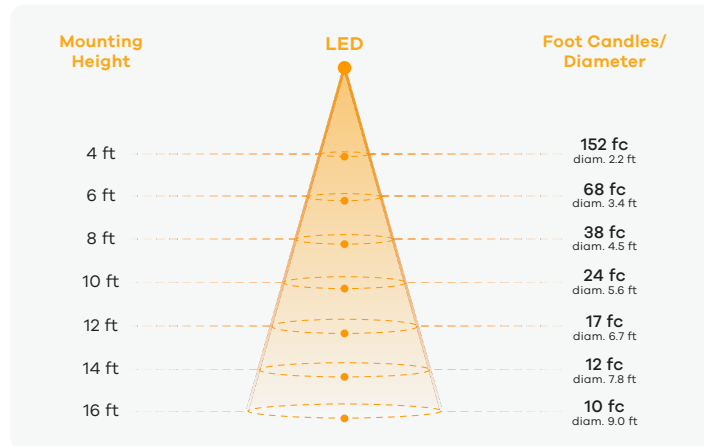

Power Information


Voltage	119.79 V
Current	0.1172 A
Power	13.7 W
Power Factor	0.9785

Summary of Results


Spacing Criteria	0 - 180: 0.28	90 - 270: 0.28	Zone	Lumens	% of Luminaire
Total Lumen Output	1433 LM		0 - 40	1133	85%
Luminaire Efficacy	107 LM/W		0 - 60	1309	99%
Maximun Candela	2436 CD		0 - 80	1321	100%

White Narrow Trim (3500K, 98CRI, 33°-Silver Reflector, 15W)

Polar Plot

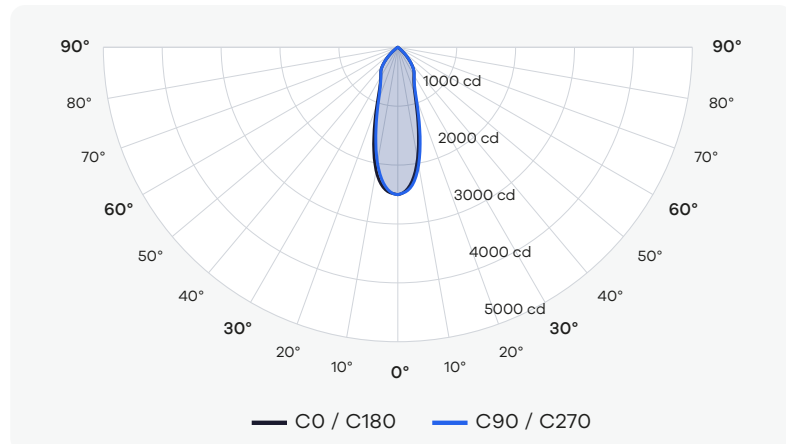

Cone of Light Tabulation

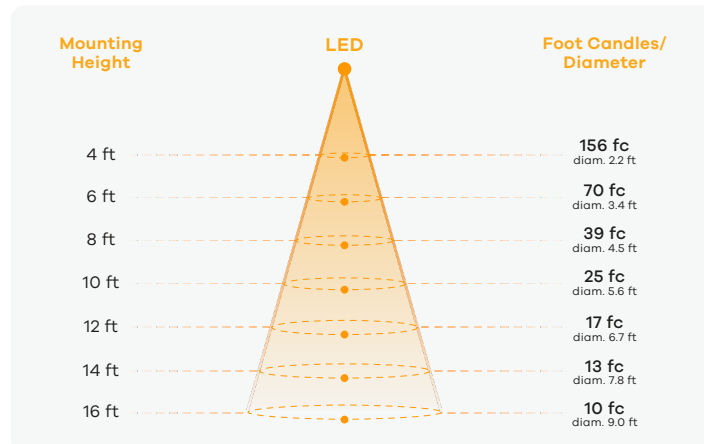

Power Information


Voltage	119.79 V
Current	0.1167 A
Power	13.7 W
Power Factor	0.9781

Summary of Results


Spacing Criteria	0 - 180: 0.28	90 - 270: 0.28	Zone	Lumens	% of Luminaire
Total Lumen Output	1472 LM		0 - 40	1164	85%
Luminaire Efficacy	98 LM/W		0 - 60	1345	99%
Maximun Candela	2503 CD		0 - 80	1358	100%

White Narrow Trim (2700K, 98CRI, 54°-Silver Reflector, 15W)

Polar Plot

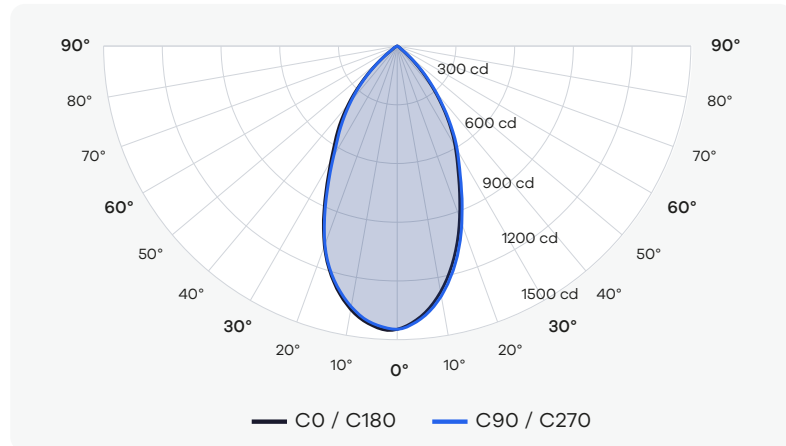

Cone of Light Tabulation

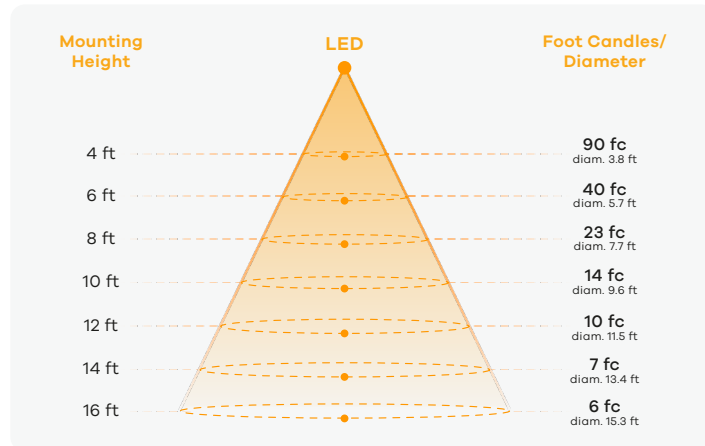

Power Information


Voltage	119.72 V
Current	0.1171 A
Power	13.7 W
Power Factor	0.9780

Summary of Results


Spacing Criteria	0 - 180: 0.48	90 - 270: 0.48	Zone	Lumens	% of Luminaire
Total Lumen Output	1335 LM		0 - 40	1057	87%
Luminaire Efficacy	89 LM/W		0 - 60	1204	99%
Maximun Candela	1447 CD		0 - 80	1212	100%

White Narrow Trim (3000K, 98CRI, 54°-Silver Reflector, 15W)

Polar Plot

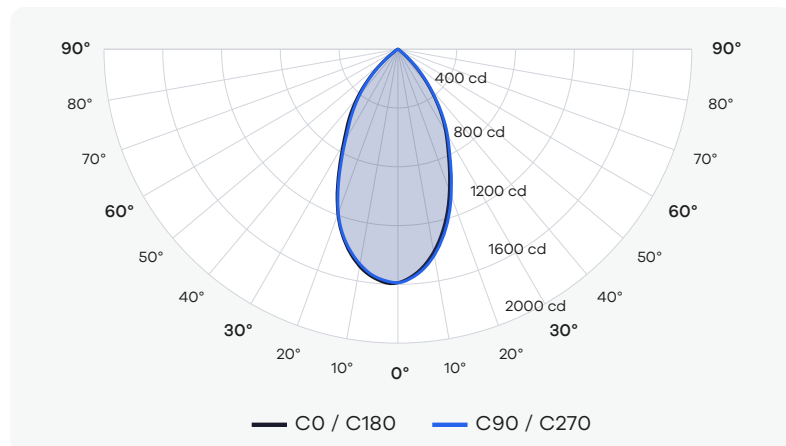

Cone of Light Tabulation

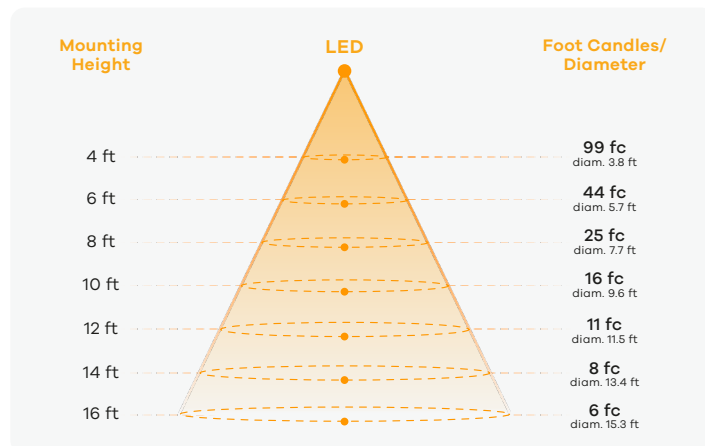

Power Information


Voltage	119.80 V
Current	0.1164 A
Power	13.7 W
Power Factor	0.9784

Summary of Results


Spacing Criteria	0 - 180: 0.48	90 - 270: 0.48	Zone	Lumens	% of Luminaire
Total Lumen Output	1466 LM		0 - 40	1161	87%
Luminaire Efficacy	110 LM/W		0 - 60	1322	99%
Maximun Candela	1589 CD		0 - 80	1331	100%

White Narrow Trim (3500K, 98CRI, 54°-Silver Reflector, 15W)

Polar Plot

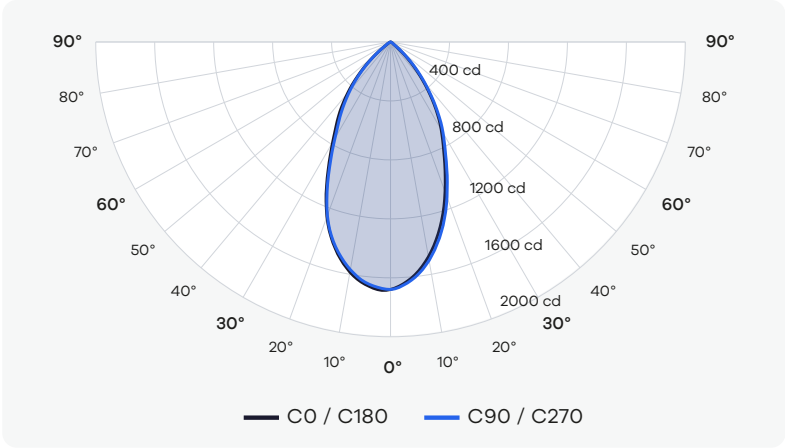

Cone of Light Tabulation

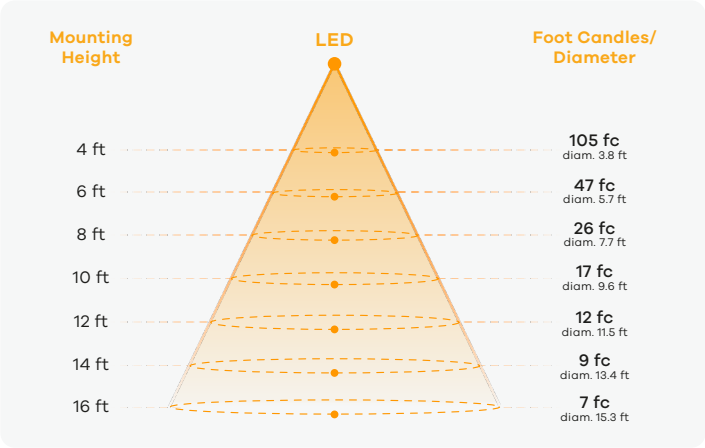

Power Information

Voltage	119.80 V
Current	0.1173 A
Power	13.7 W
Power Factor	0.9781

Summary of Results

Spacing Criteria	0 - 180: 0.48	90 - 270: 0.48	Zone	Lumens	% of Luminaire
Total Lumen Output	1550 LM		0 - 40	1227	87%
Luminaire Efficacy	103 LM/W		0 - 60	1397	99%
Maximun Candela	1679 CD		0 - 80	1406	100%