

Pura 3.5"



Selectable Color



CRI 90+ True Colors



Wet Location



Air Tight



30° Tilt Angle



Changing Lens



Dimmable




Wattage Selectable




Product Information

Color temp	27, 30, 35, 41, 50k	Dimmable	Triac Or 0-10V Dimming
Fixture	Single head	Plenum rated	FT6
Output lumens	1850/1400	Size	3.5 Inch
Beam angle	40° (Default)	Cut out	3.50"
Input volts	120/277V	OD	4.40"
Wattage	20/14W	Height	3.78"
CRI	90>	Wire space	12 Cubic inch
mA	480/320mA	Warranty	5 years
Output volts	33-38V	Plate	G-98800 5 Punch Out
IC rated	Only at 14W	Packed	18

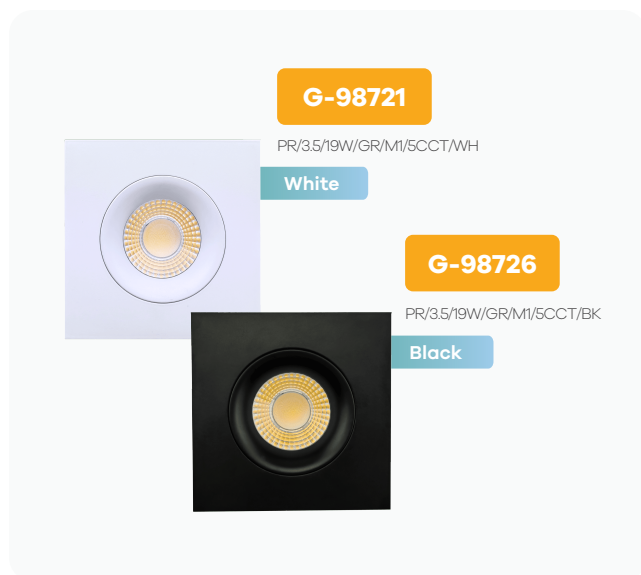

Product Information

Color temp	27, 30, 35, 41, 50k	Dimmable	Triac Or 0-10V Dimming
Fixture	Single head	Plenum rated	FT6
Output lumens	1850/1400	Size	3.5 Inch
Beam angle	40° (Default)	Cut out	3.50"
Input volts	120/277V	OD	4.40"
Wattage	20/14W	Height	3.78"
CRI	90>	Wire space	12 Cubic inch
mA	480/320mA	Warranty	5 years
Output volts	33-38V	Plate	G-98800 5 Punch Out
IC rated	Only at 14W	Packed	18

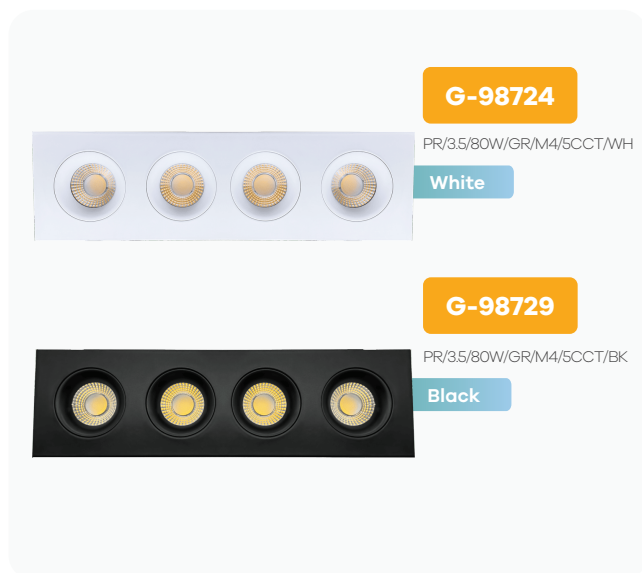

Product Information

Color temp	27, 30, 35, 41, 50k	Dimmable	Triac Or 0-10V Dimming
Fixture	Double head	Plenum rated	FT6
Output lumens	3600/2600	Size	3.5 Inch
Beam angle	40° (Default)	Cut out	3.50" x 7.10"
Input volts	120/277V	OD	4.34" x 8.00"
Wattage	40/27W	Height	3.78"
CRI	90>	Wire space	10 Cubic inch
mA	930/630mA	Warranty	5 years
Output volts	33-38V	Plate	G-98822 0 Punch Out
IC rated	Only at 27W	Packed	12

Product Information

Color temp	27, 30, 35, 41, 50k	Dimmable	Triac Or 0-10V Dimming
Fixture	Triple head	Plenum rated	FT6
Output lumens	3750/5250	Size	3.5 Inch
Beam angle	40° (Default)	Cut out	3.50" x 10.70"
Input volts	120/277V	OD	4.34" x 11.57"
Wattage	60/39W	Height	3.78"
CRI	90>	Wire space	10 Cubic inch
mA	1380/940mA	Warranty	5 years
Output volts	33-38V	Plate	G-98822 2 Punch Out
IC rated	Only at 39W	Packed	6

Product Information

Color temp	27, 30, 35, 41, 50k	Dimmable	Triac Or 0-10V Dimming
Fixture	Four head	Plenum rated	FT6
Output lumens	6800/4900	Size	3.5 Inch
Beam angle	40° (Default)	Cut out	3.50" x 14.30"
Input volts	120/277V	OD	4.34" x 15.15"
Wattage	80/50W	Height	3.78"
CRI	90>	Wire space	20 Cubic inch
mA	1850/1260mA	Warranty	5 years
Output volts	33-38V	Plate	G-98822 4 Punch Out
IC rated	Only at 50W	Packed	6

Accessories



Emergency LED Driver
15W G-48410
25W G-95525
30W G-48411
60W G-95521



Multi Driver Converter
14W G-95825
20W G-95826



Extension Cords
5ft G-20247
10ft G-20248
20ft G-19822
30ft G-19823

Note: Emergency batteries must equal or exceed the fixture's maximum wattage. Keep in mind that these fixtures feature selectable wattage.

Lens Options


Clear Lens



G-98825
PR/L/24-DEGREE



G-98826
PR/L/40-DEGREE



G-98827
PR/L/60-DEGREE

Reflector Lens



G-98828
PR/L/30°CLR




G-98829
PR/L/40°CLR

Dimensions


G-98720

G-98725

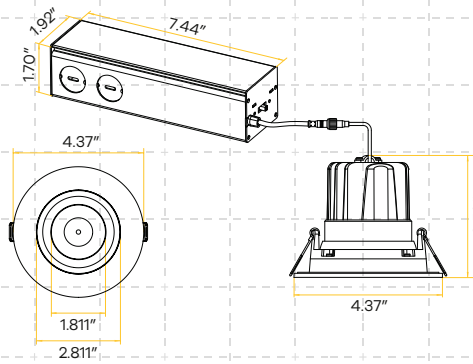


G-98721

G-98726

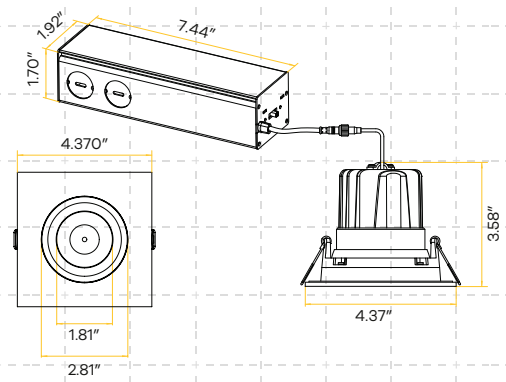


G-98722

G-98727

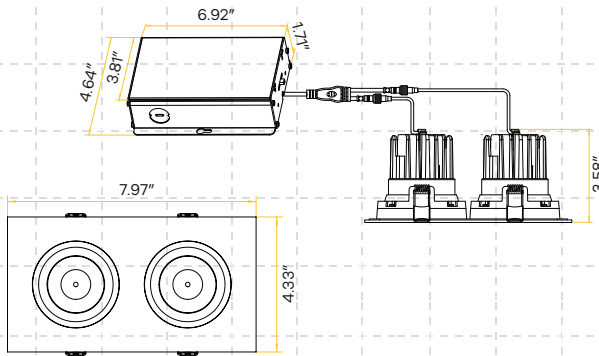

G-98723

G-98728

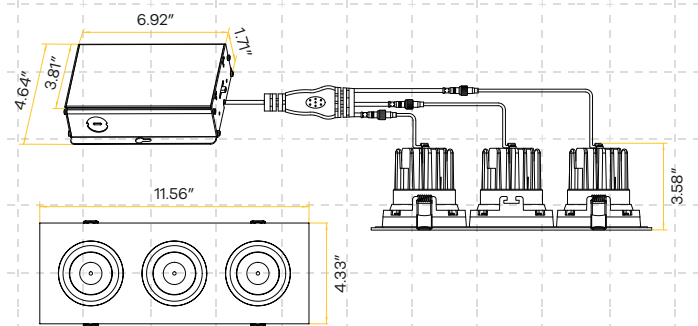

G-98724

G-98729

