

Rectangular Flushed Slim



Selectable Color



CRI 90+ True Colors



Wet Location



Air Tight



120° Beam Angle




Dimmable



IC Rated

4" x 1'

G-11141

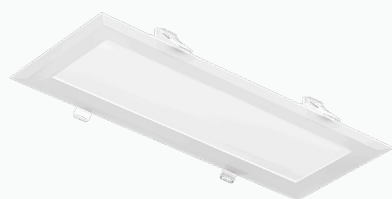

Product Information

Description	S/RCTNGL/4X12/20W/SQ/LED/5CCT	Dimmable	Triac Or 0-10V Dimming
Color temp	27, 30, 35, 41, 50k	Plenum rated	FT6
Output lumens	1600	Size	4"X1'
Beam angle	120°	Cut out	4.13" X 12.13"
Input volts	120/277V	OD	4.92" X 12.91"
Wattage	20W	Height	1.18"
CRI	90>	Warranty	3 years
mA	495mA	Packed	12
IC rated	Yes		

4" x 2'

G-11142



Product Information

Description	S/RCTNGL/4X24/40W/SQ/LED/5CCT	Dimmable	Triac Or 0-10V Dimming
Color temp	27, 30, 35, 41, 50k	Plenum rated	FT6
Output lumens	3400	Size	4"X2'
Beam angle	120°	Cut out	4.13" X 24.09"
Input volts	120/277V	OD	4.92" X 24.92"
Wattage	40W	Height	1.18"
CRI	90>	Warranty	3 years
mA	1025mA	Packed	6
IC rated	Yes		

4" x 3'**G-11143**


Product Information

Description	S/RCTNGL/4X36/56W/SQ/LED/5CCT	Dimmable	Triac Or 0-10V Dimming
Color temp	27, 30, 35, 41, 50k	Plenum rated	FT6
Output lumens	4800	Size	4"X3'
Beam angle	120°	Cut out	4.13" X 36.14"
Input volts	120/277V	OD	4.92" X 36.93"
Wattage	56W	Height	1.18"
CRI	90>	Warranty	3 years
mA	1380mA	Packed	4
IC rated	Yes		

4" x 4'**G-11144**

Product Information

Description	S/RCTNGL/4X48/80W/SQ/LED/5CCT	Dimmable	Triac Or 0-10V Dimming
Color temp	27, 30, 35, 41, 50k	Plenum rated	FT6
Output lumens	6000	Size	4"X4'
Beam angle	120°	Cut out	4.13" X 47.17"
Input volts	120/277V	OD	4.92" X 48.03"
Wattage	80W	Height	1.18"
CRI	90>	Warranty	3 years
mA	1930mA	Packed	4
IC rated	Yes		

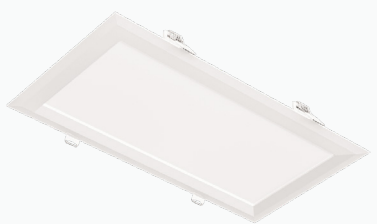6" x 1'**G-11161**

Product Information

Description	S/RCTNGL/6X12/24W/SQ/LED/5CCT	Dimmable	Triac Or 0-10V Dimming
Color temp	27, 30, 35, 41, 50k	Plenum rated	FT6
Output lumens	1900	Size	6"X1'
Beam angle	120°	Cut out	6.10" X 12.13"
Input volts	120/277V	OD	6.89" X 12.91"
Wattage	24W	Height	1.18"
CRI	90>	Warranty	3 years
mA	530mA	Packed	12
IC rated	Yes		

6" x 2'**G-11162**

Product Information

Description	S/RCTNGL/6X24/48W/SQ/LED/5CCT	Dimmable	Triac Or 0-10V Dimming
Color temp	27, 30, 35, 41, 50k	Plenum rated	FT6
Output lumens	4000	Size	6"X2'
Beam angle	120°	Cut out	6.10" X 24.09"
Input volts	120/277V	OD	6.89" X 24.92"
Wattage	48W	Height	1.18"
CRI	90>	Warranty	3 years
mA	1220mA	Packed	6
IC rated	Yes		

6" x 3'**G-11163**

Product Information

Description	S/RCTNGL/6X36/72W/SQ/LED/5CCT	Dimmable	Triac Or 0-10V Dimming
Color temp	27, 30, 35, 41, 50k	Plenum rated	FT6
Output lumens	5600	Size	6"X3'
Beam angle	120°	Cut out	6.10" X 36.14"
Input volts	120/277V	OD	6.89" X 36.93"
Wattage	72W	Height	1.18"
CRI	90>	Warranty	3 years
mA	1700mA	Packed	4
IC rated	Yes		

6" x 4'**G-11164**

Product Information

Description	S/RCTNGL/6X48/96W/SQ/LED/5CCT	Dimmable	Triac Or 0-10V Dimming
Color temp	27, 30, 35, 41, 50k	Plenum rated	FT6
Output lumens	7800	Size	6"X4'
Beam angle	120°	Cut out	6.10" X 47.17"
Input volts	120/277V	OD	6.89" X 48.03"
Wattage	96W	Height	1.18"
CRI	90>	Warranty	3 years
mA	2400mA	Packed	4
IC rated	Yes		

Accessories



Emergency LED Driver

- 25W G-95525
- 30W G-48411
- 60W G-95521









Extension Cords

- 5ft G-20247
- 10ft G-20248
- 20ft G-19822
- 30ft G-19823

Note: Emergency batteries must equal or exceed the fixture's maximum wattage. Keep in mind that these fixtures feature selectable wattage.

Dimensions

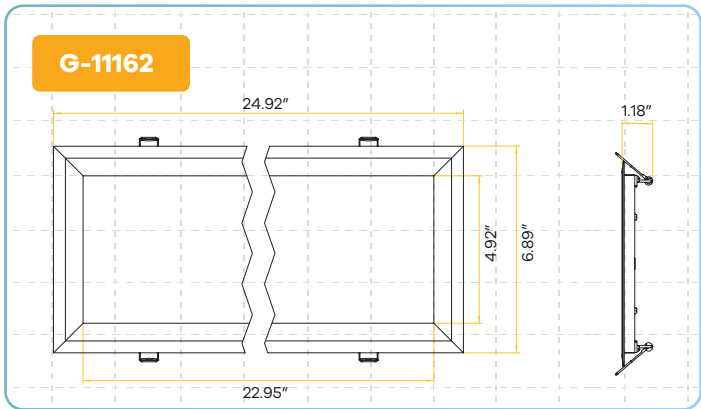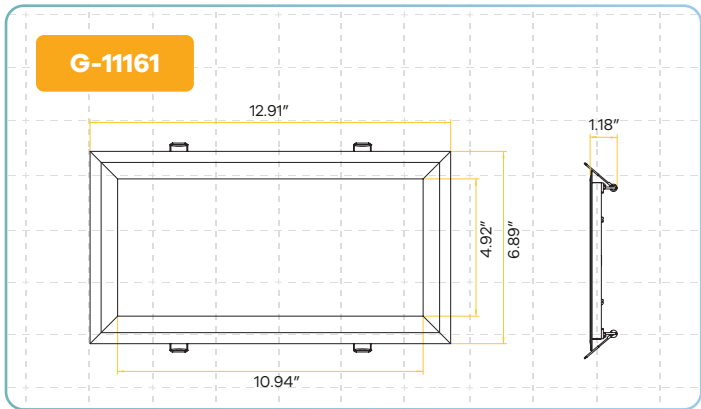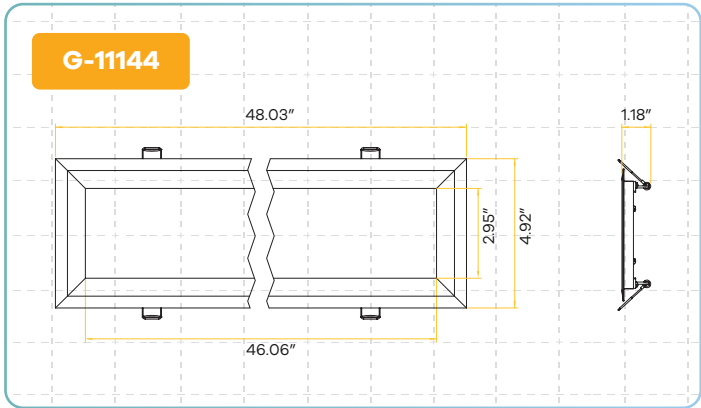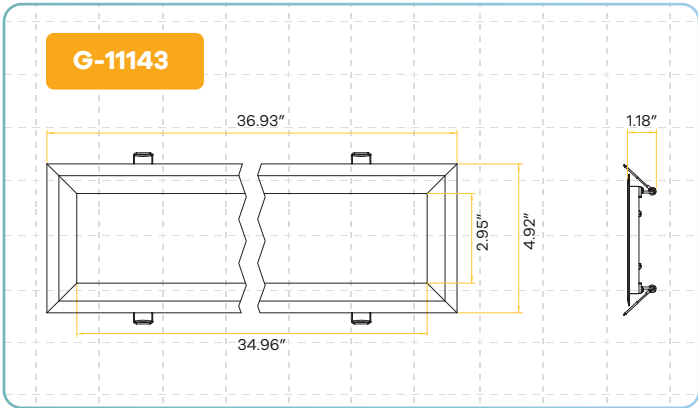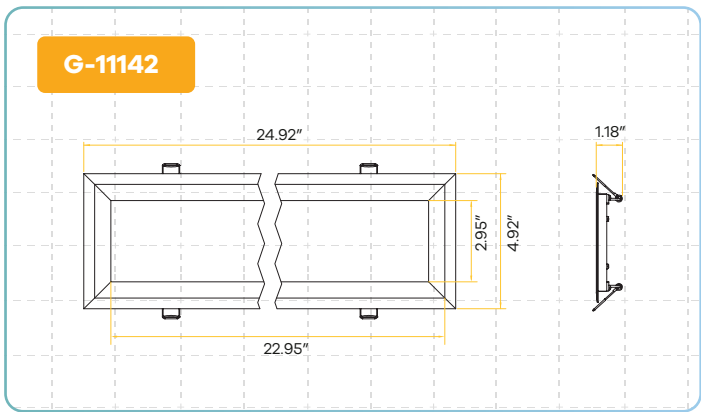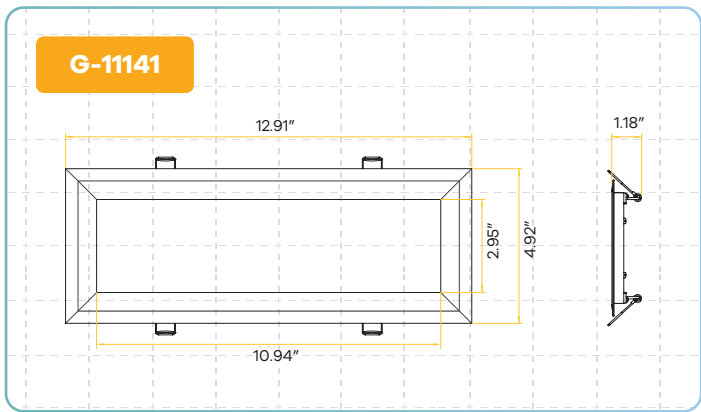

Dimensions

