

MOON TRIMLESS

DROP LENS - ROUND



G-20452




G-20453



G-20454

ITEM	G-20452	G-20453	G-20454
DESCRIPTION	DL2/12W/RD/2WS/5CCT/TL	DL3/15W/RD/2WS/5CCT/TL	DL4/20W/RD/2WS/5CCT/TL
VOLTAGE	120/277V	120/277V	120/277V
WATTS	8W/12W	10W/15W	15W/20W
LUMENS	550/850	700/1000	1200/1700
BEAM ANGLE	130	130	130
DIMMABLE	Triac or 0-10V	Triac or 0-10V	Triac or 0-10V
COLOR TEMP	27, 30, 35, 41, 50k	27, 30, 35, 41, 50k	27, 30, 35, 41, 50k
OD	3.94"	4.72	6.89
HEIGHT	2.32	2.09	2.07
CUT OUT	2.28	2.95	4.17
LENS WIDTH	2.13	2.65	4.17
LENS DROP	0.79	0.98	1.50
mA	180/310mA	230/355mA	355/515mA
CRI	90	90	90
PLENUM RATED	FT6	FT6	FT6
IC RATED	Only at 8W	Only at 10W	Only at 15W
NC PLATE	G-19975 (1)	G-19975 (2)	G-19975 (4)
PACKED	18	18	18

Dimensions

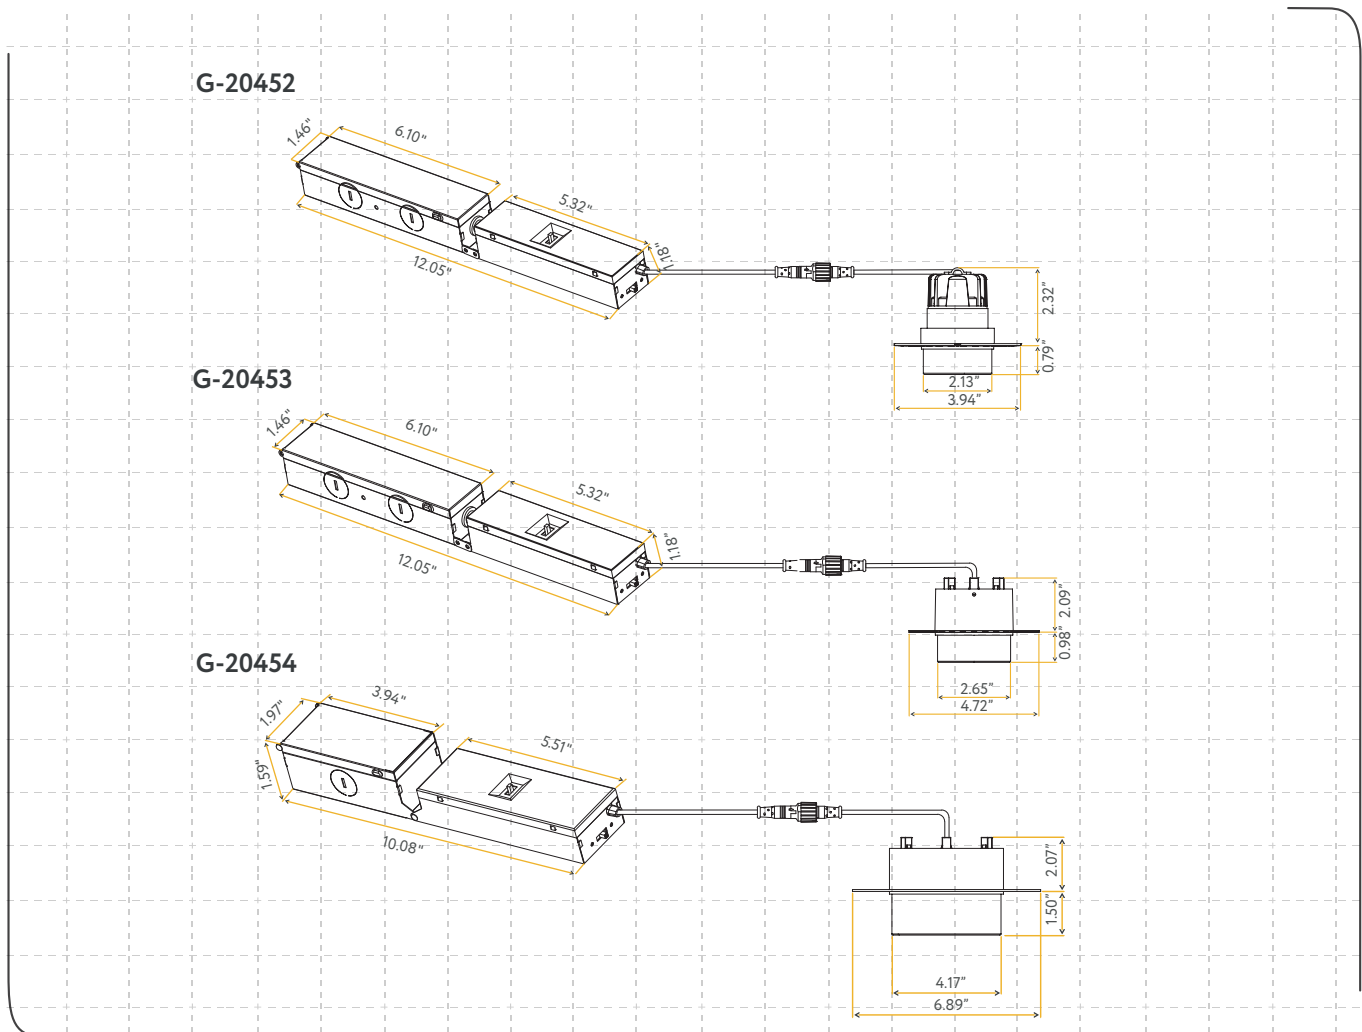

Accessories



Emergency LED Driver

15W G-48410

60W G-95521

30W G-48411

25W G-95525



Extension Cords

G-20247 5ft

G-20248 10ft

G-19822 20ft

G-19823 30ft



Multi Driver Converter

G-20452 use G-95823 8W / G-95824 12W

G-20453 use G-95824 10W / G-95825 15W

G-20454 use G-95825 15W / G-95826 20W



Construction Plate

G-19975



Lifetime:
50,000 hours



Warranty:
3 years



Dimmable:
Down to 5%

