Saturn 2" Flushed Gimbal

5 Selectable Color | 90+ CRI 90+ True Colors | Wet Location | Air Tight | Dimmable | IC Rated | Closet Rated | ETL US | FC

G-19833



Product Information

Description	R2/5W/GR/LED/5CCT	CRI	90>
Color temp	27, 30, 35, 41, 50k	mA	230mA
Trim finish	White	Dimmable	Triac
Output lumens	450	Cut out	2.00"
Beam angle	40°	OD	2.55"
Tilt angle	30°	Height	1.60"
Input volts	120V	Warranty	3 Years
Wattage	5W	Plate	G-98800 2 Punch Out

G-19834




Product Information

Description	R2/5W/GR/LED/B/5CCT	CRI	90>
Color temp	27, 30, 35, 41, 50k	mA	230mA
Trim finish	Black	Dimmable	Triac
Output lumens	450	Cut out	2.00"
Beam angle	40°	OD	2.55"
Tilt angle	30°	Height	1.60"
Input volts	120V	Warranty	3 Years
Wattage	5W	Plate	G-98800 2 Punch Out

Made In China
Goodlite Products. Tinton Falls NJ 07753.

G-19835



Product Information

Description	R2/5W/GR/LED/BN/5CCT	CRI	90>
Color temp	27, 30, 35, 41, 50k	mA	230mA
Trim finish	Brushed nickel	Dimmable	Triac
Output lumens	450	Cut out	2.00″
Beam angle	40°	OD	2.55″
Tilt angle	30°	Height	1.60″
Input volts	120V	Warranty	3 Years
Wattage	5W	Plate	G-98800 2 Punch Out


G-19836



Product Information

Description	R2/5W/GR/LED/BZ/5CCT	CRI	90>
Color temp	27, 30, 35, 41, 50k	mA	230mA
Trim finish	Bronze	Dimmable	Triac or 0-10V
Output lumens	450	Cut out	2.00″
Beam angle	40°	OD	2.55″
Tilt angle	30°	Height	1.60″
Input volts	120-277V	Warranty	3 Years
Wattage	5W	Plate	G-98800 2 Punch Out

G-19837



Product Information

Description	R2/5W/GR/LED/BB/5CCT	CRI	90>
Color temp	27, 30, 35, 41, 50k	mA	230mA
Trim finish	Brushed brass	Dimmable	Triac or 0-10V
Output lumens	450	Cut out	2.00″
Beam angle	40°	OD	2.55″
Tilt angle	30°	Height	1.60″
Input volts	120-277V	Warranty	3 Years
Wattage	5W	Plate	G-98800 2 Punch Out

G-19839



Product Information

Description	R2/5W/GS/LED/5CCT	CRI	90>
Color temp	27, 30, 35, 41, 50k	Dimmable	Triac
Trim finish	White	Cut out	2.00″
Output lumens	450	OD	2.55″
Beam angle	40°	Height	1.60″
Tilt angle	30°	Warranty	3 Years
Input volts	120V	Plate	G-98800 2 Punch Out
Wattage	5W	Packed	18

HO Round Flushed Gimbal

G-24520

Changing Lens



Product Information

Description	R2/14W/GR/LED/2WS/5CCT	IC rated	Only at 8W
Color temp	27, 30, 35, 41, 50k	Dimmable	Triac or 0-10V
Trim finish	White	Plenum rated	FT6
Output lumens	1100/700	Cut out	2.00″
Beam angle	60° (Default)	OD	2.55″
Tilt angle	30°	Height	4.00″
Input volts	120-277V	Wire space	10 Cubic inch
Wattage	14/8W	Warranty	3 Years
CRI	90>	Plate	G-98800 2 Punch Out
mA	190/330mA	Packed	18

G-24521

Changing Lens



Product Information

Description	R2/14W/GR/LED/2WS/5CCT/BK	IC rated	Only at 8W
Color temp	27, 30, 35, 41, 50k	Dimmable	Triac or 0-10V
Trim finish	Black	Plenum rated	FT6
Output lumens	1100/700	Cut out	2.00″
Beam angle	60° (Default)	OD	2.55″
Tilt angle	30°	Height	4.00″
Input volts	120-277V	Wire space	10 Cubic inch
Wattage	14/8W	Warranty	3 Years
CRI	90>	Plate	G-98800 2 Punch Out
mA	190/330mA	Packed	18

Made In China
Goodlite Products. Tinton Falls NJ 07753.

Lens Options for G-24520 / G-24521

Clear Lens



G-25600
SN/L2/24-DEGREE



G-25601
SN/L2/40-DEGREE



G-25602
SN/L2/60-DEGREE

Accessories



Emergency LED Driver
15W G-48410
25W G-95525
30W G-48411
60W G-95521



Multi Driver Converter
For G-24520 / G-24521 /
use 8W G-95823
use 14W G-95825
For G-19833 / G-19834 / G-19835 / G-19836 / G-19837
use 5W G-95823



Extension Cords
5ft G-20247
10ft G-20248
20ft G-19822
30ft G-19823


Note: Emergency batteries must equal or exceed the fixture's maximum wattage. Keep in mind that these fixtures feature selectable wattage.



120-277V Drivers (0-10 Dimming)
For G-19839
use G-48306


Dimensions

Regular

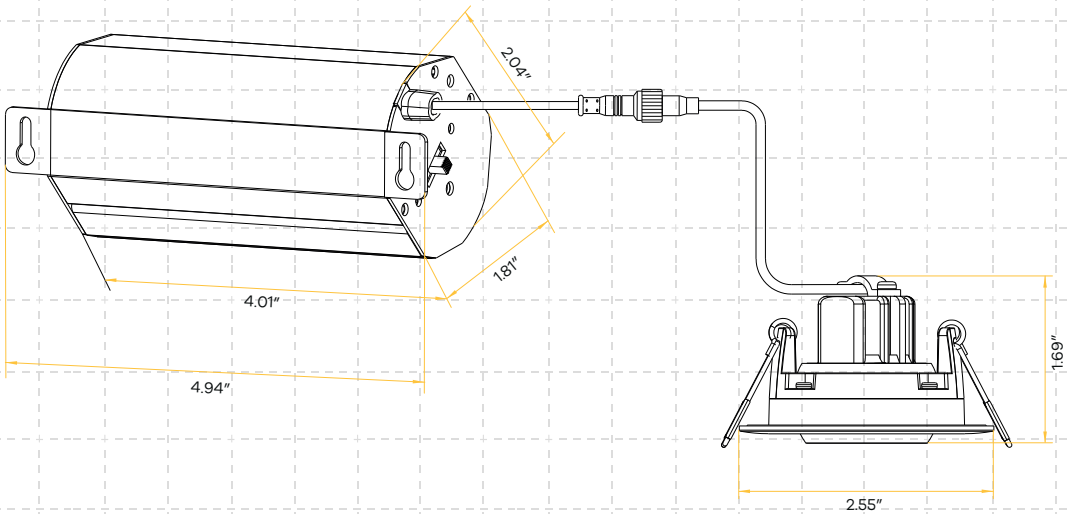

Dimensions

High Output

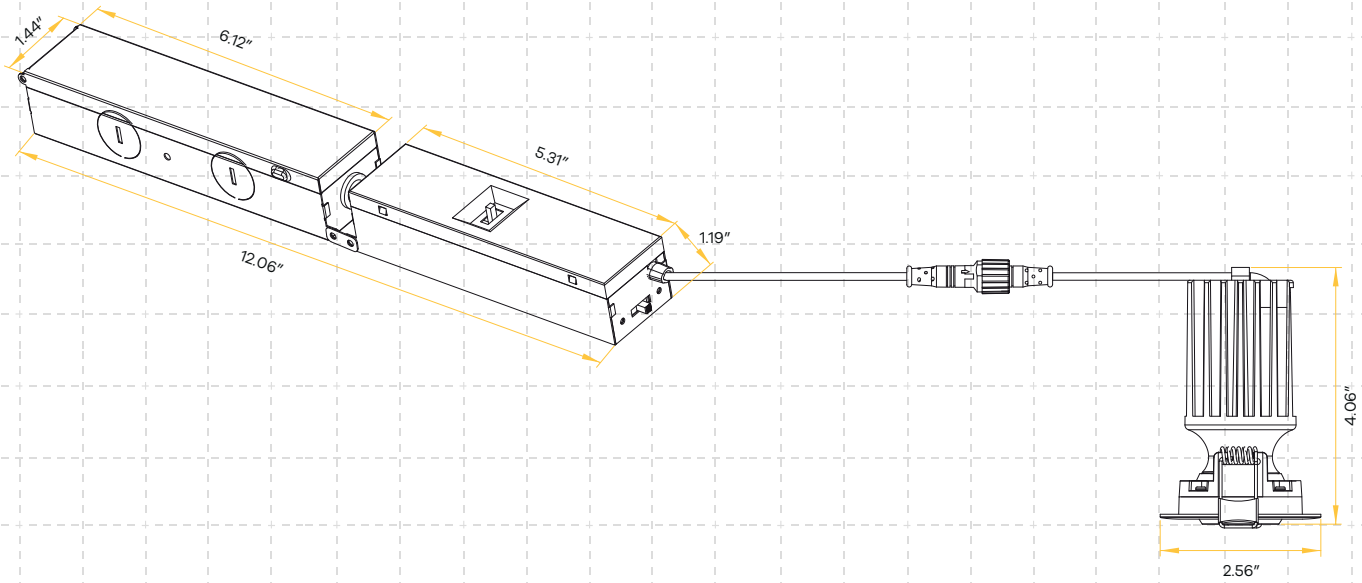

Made In China
Goodlite Products. Tinton Falls NJ 07753.