Saturn 2" Trimmed Regress

Selectable Color | CRI 90+ True Colors | Wet Location | Air Tight | Dimmable



Product Information


Color temp	27, 30, 35, 41, 50k	IC rated	Yes
Trim finish	White	Dimmable G-20087	Triac Or 0-10V
Output lumens	400	Dimmable G-20080	Triac
Beam angle	40°	Cut out	2.45"
Tilt angle	30°	OD	3.00"
Input volts	120V	Height	2.00"
Wattage	5W	Warranty	3 Years
CRI	90>	Plate	G-98800 3 Punch Out
mA	110mA	Packed	18
Output volts	33-38V	Packed	18



Product Information

Color temp	27, 30, 35, 41, 50k	IC rated	Only at 8W
Trim finish	White	Dimmable	Triac Or 0-10V
Output lumens	1100/700	Plenum rated	FT6
Beam angle	60°	Cut out	2.45"
Tilt angle	30°	OD	3.00"
Input volts	120-277V	Height	4.45"
Wattage	14/8W	Wire space	10 Cubic inch
CRI	90>	Warranty	3 Years
mA	190/330mA	Plate	G-98800 3 Punch Out
Output volts	33-38V	Packed	18


Made In China
Goodlite Products. Tinton Falls NJ 07753.



G-20088

R2/5W/GSR/LED/5CCT

White



G-20083

R2/5W/GSR/LED/5CCT/B

Black

Product Information


Color temp	27, 30, 35, 41, 50k	IC rated	Yes
Trim finish	Black	Output volts	33-38V
Output lumens	400	Dimmable	Triac
Beam angle	40°	Cut out	2.45″
Tilt angle	30°	OD	3.00″
Input volts	120V	Height	2.00″
Wattage	5W	Warranty	3 Years
CRI	90>	Plate	G-98800 3 Punch Out
mA	110mA	Packed	18



G-25120

R2/14W/GRR/LED/5CCT/BK

White



G-25121

R2/14W/GSR/LED/5CCT/BK

Black

Product Information

Color temp	27, 30, 35, 41, 50k	IC rated	Only at 8W
Trim finish	Black	Dimmable	Triac Or 0-10V
Output lumens	1100/700	Plenum rated	FT6
Beam angle	60°	Cut out	2.45″
Tilt angle	30°	OD	3.00″
Input volts	120-277V	Height	4.45″
Wattage	14/8W	Wire space	10 Cubic inch
CRI	90>	Warranty	3 Years
mA	190/330mA	Plate	G-98800 3 Punch Out
Output volts	33-38V	Packed	18

Lens Options for G-24920 / G-24921 / G-25120 / G-25121

Clear Lens



G-25600
SN/L2/24-DEGREE



G-25601
SN/L2/40-DEGREE



G-25602
SN/L2/60-DEGREE

Accessories



Emergency LED Driver

15W G-48410
25W G-95525
30W G-48411
60W G-95521



Multi Driver Converter

For G-20087 / G-20080 / G-20088 / G-20083
use 5W G-95823

For G-24920 / G-24921 / G-25120 / G-25121
use 8W G-95823
use 14W G-95825




Extension Cords


5ft G-20247
10ft G-20248
20ft G-19822
30ft G-19823

Dimensions

Regular

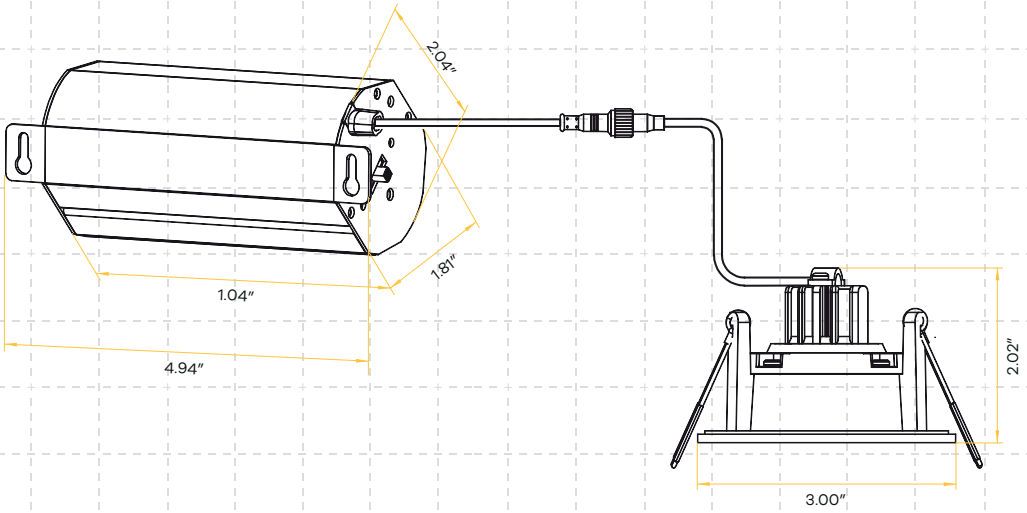

High Output

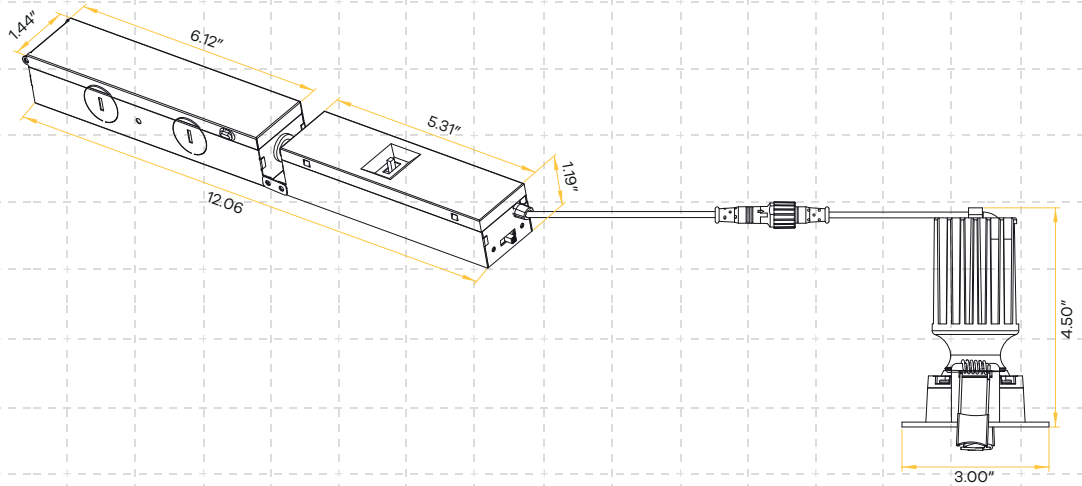

Made In China
Goodlite Products. Tinton Falls NJ 07753.