Saturn 3” Square Regress

Selectable Color | CRI 90+ True Colors | Wet Location | Air Tight | 30° Tilt Angle | Dimmable | IC Rated

JA8 TITLE 24

G-20090



Product Information

Description	R3/8W/GSR/LED/5CCT	mA	170mA
Color temp	27, 30, 35, 41, 50k	Output volts	33-38V
Trim finish	White	Dimmable	Triac or 0-10V
Output lumens	800	Cut out	3.35”
Beam angle	40°	OD	4.33”
Tilt angle	30°	Height	2.48”
Input volts	120-277V	Warranty	3 Years
Wattage	8W	Plate	G-98800 5 Punch Out
CRI	90>	Packed	18

G-48363



Product Information

Description	R3/8W/GSR/LED/B/5CCT	mA	170mA
Color temp	27, 30, 35, 41, 50k	Output volts	33-38V
Trim finish	Black	Dimmable	Yes
Output lumens	650	Cut out	3.35”
Beam angle	40°	OD	4.33”
Tilt angle	30°	Height	2.48”
Input volts	120V	Warranty	3 Years
Wattage	8W	Plate	G-98800 5 Punch Out
CRI	90>	Packed	18

Made In China
Goodlite Products. Tinton Falls NJ 07753.

G-48365



Product Information

Description	R3/8W/GSR/LED/BZ/5CCT	mA	170mA
Color temp	27, 30, 35, 41, 50k	Output volts	33-38V
Trim finish	Bronze	Dimmable	Yes
Output lumens	650	Cut out	3.35″
Beam angle	40°	OD	4.33″
Tilt angle	30°	Height	2.48″
Input volts	120V	Warranty	3 Years
Wattage	8W	Plate	G-98800 5 Punch Out
CRI	90>	Packed	18

G-48364



Product Information

Description	R3/8W/GRR/LED/BN/5CCT	mA	170mA
Color temp	27, 30, 35, 41, 50k	Output volts	33-38V
Trim finish	Brushed nickel	Dimmable	Yes
Output lumens	650	Cut out	3.35″
Beam angle	40°	OD	4.33″
Tilt angle	30°	Height	2.48″
Input volts	120V	Warranty	3 Years
Wattage	8W	Plate	G-98800 5 Punch Out
CRI	90>	Packed	18

G-48369



Product Information

Description	R3/8W/GSR/LED/BB/5CCT	mA	170mA
Color temp	27, 30, 35, 41, 50k	Output volts	33-38V
Trim finish	Brushed brass	Dimmable	Yes
Output lumens	700	Cut out	3.35″
Beam angle	40°	OD	4.33″
Tilt angle	30°	Height	2.48″
Input volts	120V	Warranty	3 Years
Wattage	8W	Plate	G-98800 5 Punch Out
CRI	90>	Packed	18

G-97325



Product Information

Description	R3/11W/GSR/LED/5CCT	Output volts	33-38V
Color temp	27, 30, 35, 41, 50k	Dimmable	Triac Or 0-10V
Trim finish	White	Plenum rated	FT6
Output lumens	1050	Cut out	3.35″
Beam angle	60°	OD	4.33″
Tilt angle	30°	Height	4.85″
Input volts	120-277V	Warranty	3 Years
Wattage	11W	Plate	G-98800 5 Punch Out
CRI	90>	Packed	18
mA	250mA		

G-97326




Product Information


Description	R3/11W/GSR/LED/5CCT/BK	Output volts	33-38V
Color temp	27, 30, 35, 41, 50k	Dimmable	Triac Or 0-10V
Trim finish	Black	Plenum rated	FT6
Output lumens	1050	Cut out	3.35″
Beam angle	60°	OD	4.33″
Tilt angle	30°	Height	4.85″
Input volts	120-277V	Warranty	3 Years
Wattage	11W	Plate	G-98800 5 Punch Out
CRI	90>	Packed	18
mA	250mA		

Lens Options


Clear Lens



G-01420
FL/L3/24-DEGREE



G-01421
FL/L3/40-DEGREE



G-01422
FL/L3/60-DEGREE

Made In China
Goodlite Products. Tinton Falls NJ 07753.

Accessories



Emergency LED Driver

15W G-48410
25W G-95525
30W G-48411
60W G-95521



Multi Driver Converter

For G-20090 / G-48363 / G-48364 / G-48365 / G-48369
use 8W G-95823
For G-97325 / 97326
use 10W G-95824



Extension Cords

5ft G-20247
10ft G-20248
20ft G-19822
30ft G-19823

Note: Emergency batteries must equal or exceed the fixture's maximum wattage. Keep in mind that these fixtures feature selectable wattage.




120-277V Drivers (0-10 Dimming)

For G-20090 / G-48363 / G-48364 / G-48365 / G-48369
use G-48300

Dimensions

Regular

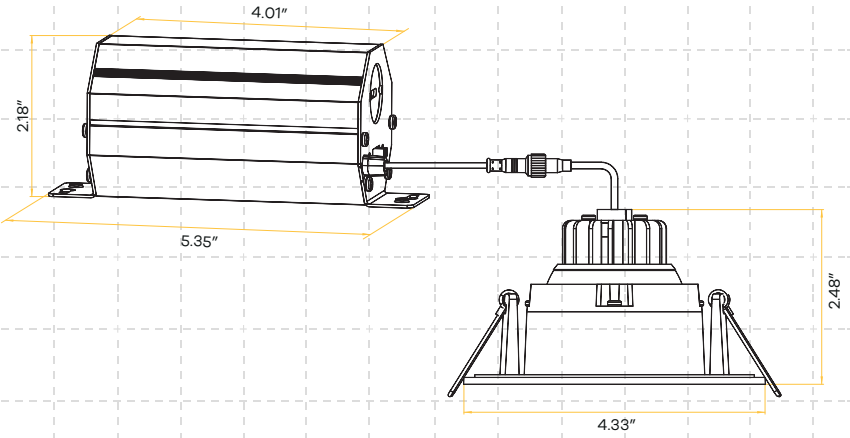

High Output

