Saturn 4” Flushed Gimbal

Selectable Color | CRI 90+ True Colors | Wet Location | Air Tight | Dimmable | IC Rated

G-20001



Product Information

Description	R4/14W/GR/LED/5CCT	mA	330mA
Color temp	27, 30, 35, 41, 50k	Dimmable	Triac or 0-10V
Trim finish	White	Cut out	4.00”
Output lumens	1100	OD	5.03"
Beam angle	40°	Height	2.51”
Tilt angle	23°	Warranty	3 Years
Input volts	120-277V	Plate	G-98800 6 Punch Out
Wattage	14W	Packed	18
CRI	90>		

G-48357



Product Information

Description	R4/14W/GR/B/LED/5CCT	mA	330mA
Color temp	27, 30, 35, 41, 50k	Dimmable	Yes
Trim finish	Black	Cut out	4.00”
Output lumens	1200	OD	5.03"
Beam angle	40°	Height	2.51”
Tilt angle	23°	Warranty	3 Years
Input volts	120-277V	Plate	G-98800 6 Punch Out
Wattage	14W	Packed	18
CRI	90>		

Made In China
Goodlite Products. Tinton Falls NJ 07753.

G-48358



Product Information

Description	R4/14W/GR/BN/LED/5CCT	mA	330mA
Color temp	27, 30, 35, 41, 50k	Dimmable	Yes
Trim finish	Brushed nickel	Cut out	4.00″
Output lumens	1100	OD	5.03"
Beam angle	40°	Height	2.51″
Tilt angle	23°	Warranty	3 Years
Input volts	120V	Plate	G-98800 6 Punch Out
Wattage	14W	Packed	18
CRI	90>		

G-48359



Product Information

Description	R4/14W/GR/BZ/LED/5CCT	mA	330mA
Color temp	27, 30, 35, 41, 50k	Dimmable	Yes
Trim finish	Bronze	Cut out	4.00″
Output lumens	1200	OD	5.03"
Beam angle	40°	Height	2.51″
Tilt angle	23°	Warranty	3 Years
Input volts	120-277V	Plate	G-98800 6 Punch Out
Wattage	14W	Packed	18
CRI	90>		

G-20005



Product Information

Description	R4/14W/GR/BB/LED/5CCT	mA	330mA
Color temp	27, 30, 35, 41, 50k	Dimmable	Yes
Trim finish	Brushed brass	Cut out	4.00″
Output lumens	1400	OD	5.03"
Beam angle	40°	Height	2.51″
Tilt angle	23°	Warranty	3 Years
Input volts	120-277V	Plate	G-98800 6 Punch Out
Wattage	14W	Packed	18
CRI	90>		

G-20006



Product Information

Description	R4/14W/SQ/LED/5CCT	CRI	90>
Color temp	27, 30, 35, 41, 50k	Dimmable	Triac
Trim finish	White	Cut out	4.00″
Output lumens	1100	OD	5.03"
Beam angle	40°	Height	2.51″
Tilt angle	23°	Warranty	3 Years
Input volts	120V	Plate	G-98800 6 Punch Out
Wattage	14W	Packed	18

HO Round Flushed Gimbal

G-20007



Product Information

Description	R4/20W/GR/LED/5CCT	mA	450mA
Color temp	27, 30, 35, 41, 50k	Dimmable	Triac Or 0-10V
Trim finish	White	Plenum rated	FT6
Output lumens	1750	Cut out	4.00″
Beam angle	60°	OD	5.03"
Tilt angle	20°	Height	4.57″
Input volts	120-277V	Warranty	3 Years
Wattage	20W	Plate	G-98800 6 Punch Out
CRI	90>	Packed	18

G-20008



Product Information

Description	R4/20W/GR/LED/BK/5CCT	mA	450mA
Color temp	27, 30, 35, 41, 50k	Dimmable	Triac Or 0-10V
Trim finish	Black	Plenum rated	FT6
Output lumens	1750	Cut out	4.00″
Beam angle	60°	OD	5.03"
Tilt angle	20°	Height	4.57″
Input volts	120-277V	Warranty	3 Years
Wattage	20W	Plate	G-98800 6 Punch Out
CRI	90>	Packed	18

Made In China
Goodlite Products. Tinton Falls NJ 07753.

Lens Options

Clear Lens



G-25631
SN/L4/40-DEGREE



G-25632
SN/L4/60-DEGREE

Accessories



Emergency LED Driver
15W G-48410
25W G-95525
30W G-48411
60W G-95521



Multi Driver Converter
For G-20001 / G-48357 / G-48358 / G-48359 / G-20005
use 14W G-95825
For G-20007 / G-20008
use 20W G-95826



Extension Cords
5ft G-20247
10ft G-20248
20ft G-19822
30ft G-19823


Note: Emergency batteries must equal or exceed the fixture's maximum wattage. Keep in mind that these fixtures feature selectable wattage.



120-277V Drivers (0-10 Dimming)
For G-20006
use G-48302


Dimensions

Regular

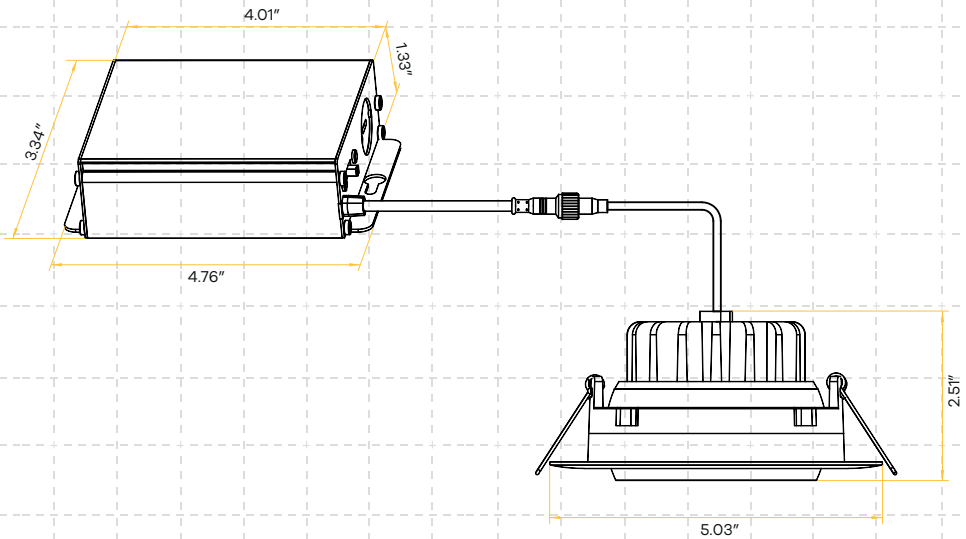

Dimensions

High Output

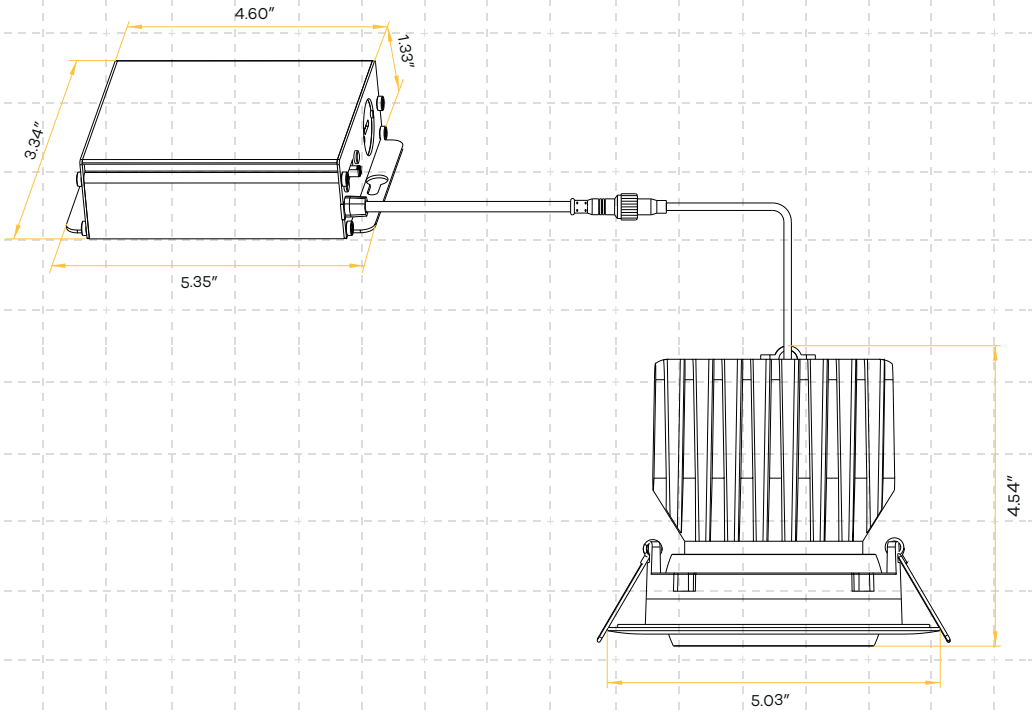

Made In China
Goodlite Products. Tinton Falls NJ 07753.