Saturn 4" Round Trimmed Regress

5 Selectable Color | 90+ CRI 90+ True Colo rs | Wet Location | Air Tight | Dimmable | IC Rated | CLOSET RATED | ETL US | FC

G-20091



Product Information

Description	R4/14W/GRR/LED/5CCT	mA	330mA
Color temp	27, 30, 35, 41, 50k	Dimmable	Triac or 0-10V
Trim finish	White	Cut out	4.55″
Output lumens	1400	OD	5.75″
Beam angle	40°	Height	3.20″
Tilt angle	23°	Warranty	3 Years
Input volts	120-277V	Plate	G-98800 7 Punch Out
Wattage	14W	Packed	18
CRI	90>		

G-48366



Product Information

Description	R4/14W/GRR/LED/BK/5CCT	mA	330mA
Color temp	27, 30, 35, 41, 50k	Dimmable	Triac
Trim finish	Black	Cut out	4.55″
Output lumens	1100	OD	5.75″
Beam angle	40°	Height	3.20″
Tilt angle	23°	Warranty	3 Years
Input volts	120V	Plate	G-98800 7 Punch Out
Wattage	14W	Packed	18
CRI	90>		

Made In China
Goodlite Products. Tinton Falls NJ 07753.

G-97420



Product Information

Description	R4/28W/WS2/GRR/LED/5CCT	IC rated	Only At 20W
Color temp	27, 30, 35, 41, 50k	Dimmable	Triac Or 0-10V
Trim finish	White	Plenum rated	FT6
Output lumens	2000/2700	Cut out	4.55″
Beam angle	60°	OD	5.75″
Tilt angle	20°	Height	5.00″
Input volts	120-277V	Warranty	3 Years
Wattage	20/28W	Plate	G-98800 7 Punch Out
CRI	90>	Packed	12
mA	450mA		

G-97421




Product Information

Description	R4/20W/GRR/LED/5CCTBK	IC rated	Yes
Color temp	27, 30, 35, 41, 50k	Dimmable	Triac Or 0-10V
Trim finish	Black	Plenum rated	FT6
Output lumens	1750	Cut out	4.55″
Beam angle	60°	OD	5.75″
Tilt angle	20°	Height	5.00″
Input volts	120-277V	Warranty	3 Years
Wattage	20W	Plate	G-98800 7 Punch Out
CRI	90>	Packed	12
mA	450mA		

Lens Options

Clear Lens



G-25631
SN/L4/40-DEGREE



G-25632
SN/L4/60-DEGREE

Accessories



Emergency LED Driver
15W G-48410
25W G-95525
30W G-48411
60W G-95521



Multi Driver Converter
For G-20091 / G-48366 /
use 14W G-95825
For G-97420 / 97421
use 20W G-95826



Extension Cords
5ft G-20247
10ft G-20248
20ft G-19822
30ft G-19823


Note: Emergency batteries must equal or exceed the fixture's maximum wattage. Keep in mind that these fixtures feature selectable wattage.




120-277V Drivers (0-10 Dimming)
For G-20091 / G-48366
use G-48302

Dimensions

Regular

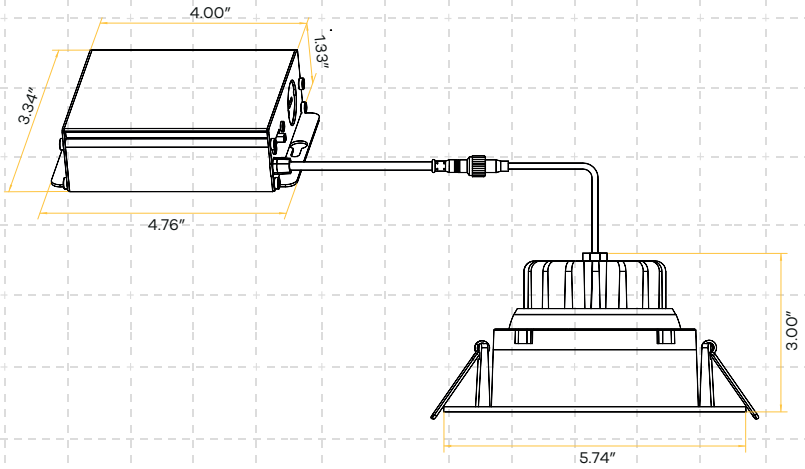

High Output

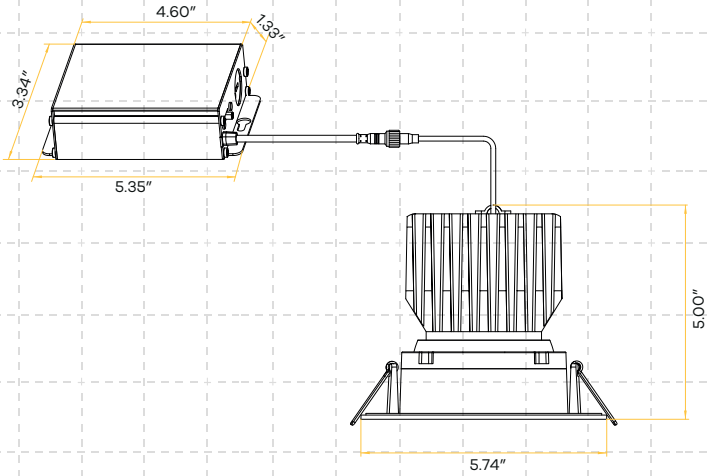

Made In China
Goodlite Products. Tinton Falls NJ 07753.