Saturn 4" Square Regress

5 Selectable Color | 90+ CRI 90+ True Colors | Wet Location | Air Tight | Dimmable | IC Rated | Closet Rated | ETL US | FC


G-20092



Product Information

Description	R4/14W/GSR/LED/5CCT	Output volts	38V
Color temp	27, 30, 35, 41, 50k	Dimmable	Triac or 0-10V
Trim finish	White	Cut out	4.55″
Output lumens	1300	OD	5.75″
Beam angle	40°	Height	3.00″
Tilt angle	23°	Warranty	3 Years
Input volts	120-277V	Plate	G-98800 7 Punch Out
Wattage	14W		G-98810 7 Punch Out
CRI	90>	Packed	18
mA	330mA		

G-48367




Product Information

Description	R4/14W/GRR/LED/BK/5CCT	Output volts	38V
Color temp	27, 30, 35, 41, 50k	Dimmable	Triac
Trim finish	Black	Cut out	4.55
Output lumens	1100	OD	5.75″
Beam angle	40°	Height	3.00″
Tilt angle	23°	Warranty	3 Years
Input volts	120V	Plate	G-98800 7 Punch Out
Wattage	14W		G-98810 7 Punch Out
CRI	90>	Packed	18
mA	330mA		

Made In China
Goodlite Products. Tinton Falls NJ 07753.


G-97425



Product Information

Description	R4/20W/GSR/LED/5CCT	Output volts	33-38V
Color temp	27, 30, 35, 41, 50k	Dimmable	Triac Or 0-10V
Trim finish	White	Plenum rated	FT6
Output lumens	1750	Cut out	4.55″
Beam angle	60°	OD	5.75″
Tilt angle	20°	Height	5.00″
Input volts	120-277V	Warranty	3 Years
Wattage	20W	Plate	G-98800 7 Punch Out
CRI	90>		G-98810 7 Punch Out
mA	450mA	Packed	12

G-97426




Product Information


Description	R4/20W/GSR/LED/5CCT/BK	Output volts	33-38V
Color temp	27, 30, 35, 41, 50k	Dimmable	Triac Or 0-10V
Trim finish	Black	Plenum rated	FT6
Output lumens	1750	Cut out	4.55″
Beam angle	60°	OD	5.75″
Tilt angle	20°	Height	5.00″
Input volts	120-277V	Warranty	3 Years
Wattage	20W	Plate	G-98800 7 Punch Out
CRI	90>		G-98810 7 Punch Out
mA	450mA	Packed	12

Lens Options

Clear Lens



G-25631
SN/L4/40-DEGREE



G-25632
SN/L4/60-DEGREE

Accessories



Emergency LED Driver

For G-20092 / G-48367
use 15W G-48410 only
25W G-95525
30W G-48411
60W G-95521



Multi Driver Converter

For G-20092 / G-48367 /
use 14W G-95825
For G-97425 / 97426
use 20W G-95826



Extension Cords

5ft G-20247
10ft G-20248
20ft G-19822
30ft G-19823

Note: Emergency batteries must equal or exceed the fixture's maximum wattage. Keep in mind that these fixtures feature selectable wattage.




120-277V Drivers (0-10 Dimming)


For G-20092 / G-48367
use G-48302

Dimensions

Regular

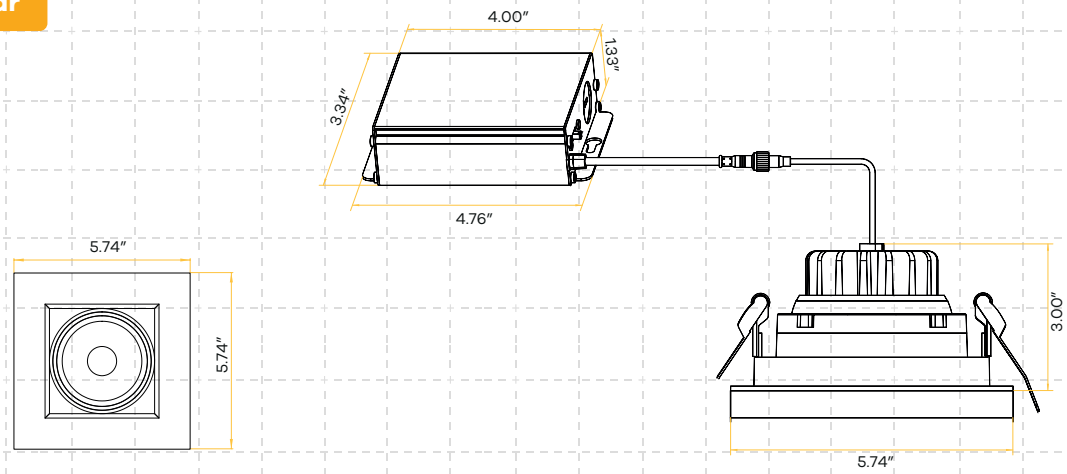

High Output

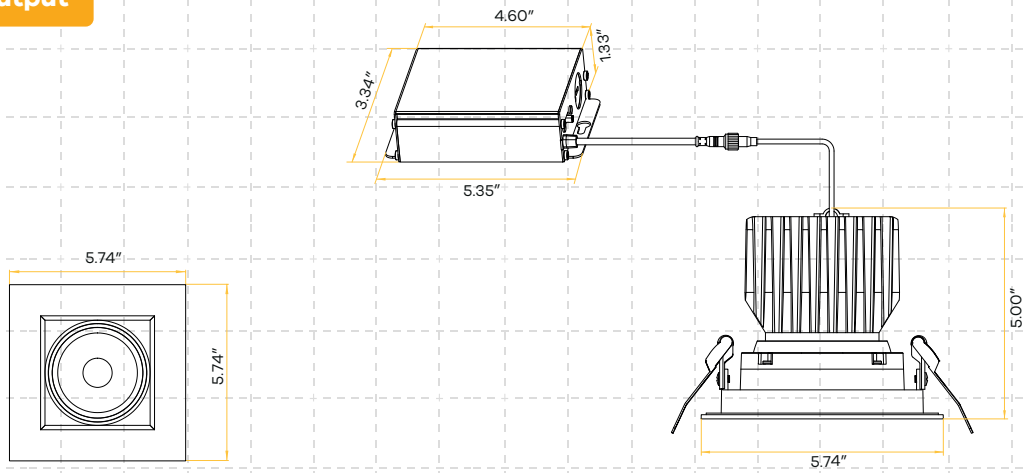

Made In China
Goodlite Products. Tinton Falls NJ 07753.