

Silent 1"

Aperture Interchangeable HO Mud-in Module

Product Information

Description	ST/1/M/25W/LED
Output lumens	1750-2000
Beam angle	50° (Default)
Input volts	36V
Wattage	25W
CRI	90>
mA	630mA
IC rated	YES
Dimmable	Triac or 0-10V
Plenum rated	FT6
Wire Length	30 FT
Cut out	5.85"
OD	8.50"
Height	2.807"
Packed	6



Trim Options

Trims


Trimless

Drop Trims

Multihead Trimless Kits

Ordering Guide

Component	Status	Component	Status
Module	REQUIRED	Lens	OPTIONAL Default lens included
Diode	REQUIRED	NC Plate	OPTIONAL
Driver	REQUIRED	Extractor	OPTIONAL
Trim Kit	REQUIRED	Extension Cords	OPTIONAL



Lens Options

Frosted Lens



G-11722
ST/L/FR/80-DEGREE

Flushed Lenses



Clear
G-11822
ST/L/FL/CLR/60-DEGREE



Frosted
G-11820
ST/L/FL/FR/60-DEGREE

Accessories

Required



Diode (sold separately)

G-10027 2700K - 1750lm
G-10030 3000K - 1800lm
G-10035 3500K - 1900lm
G-10040 4100K - 2000lm
G-10050 5000K - 2000lm



Emergency LED Driver

25W G-95525
30W G-48411
60W G-95521




Silent Extractor

G-11724




Extension Cords

5ft G-20247
10ft G-20248
20ft G-19822
30ft G-19823



New Construction Plate

G-98800 9 Punch Out




New Construction Plate

G-98810 9 Punch Out


Driver Dimensions

Single Channel Driver

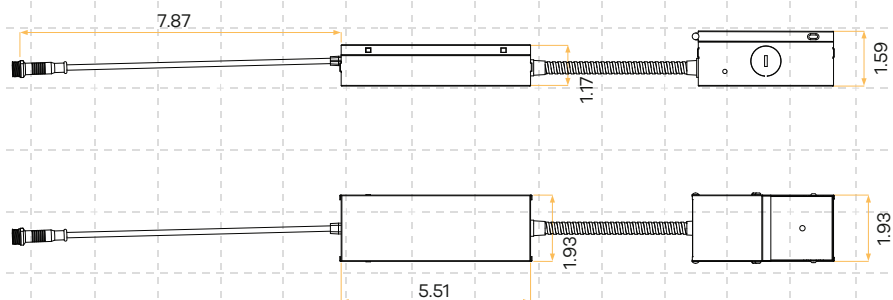


Driver Dimensions


5 Channel Driver

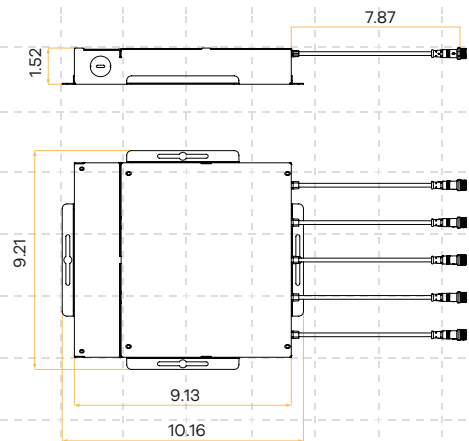

10 Channel Driver

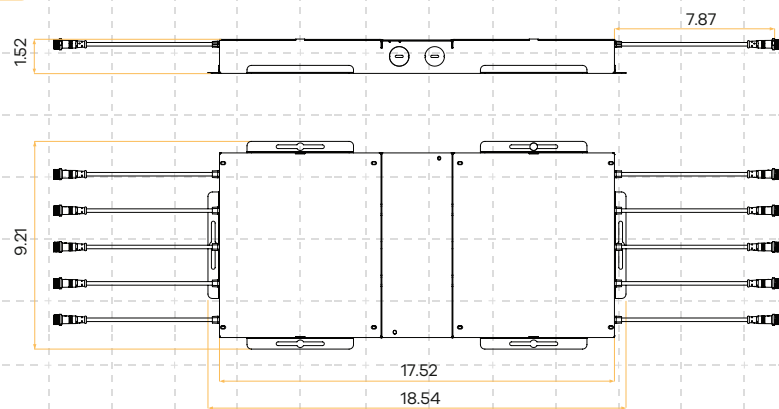

Wiring Overview

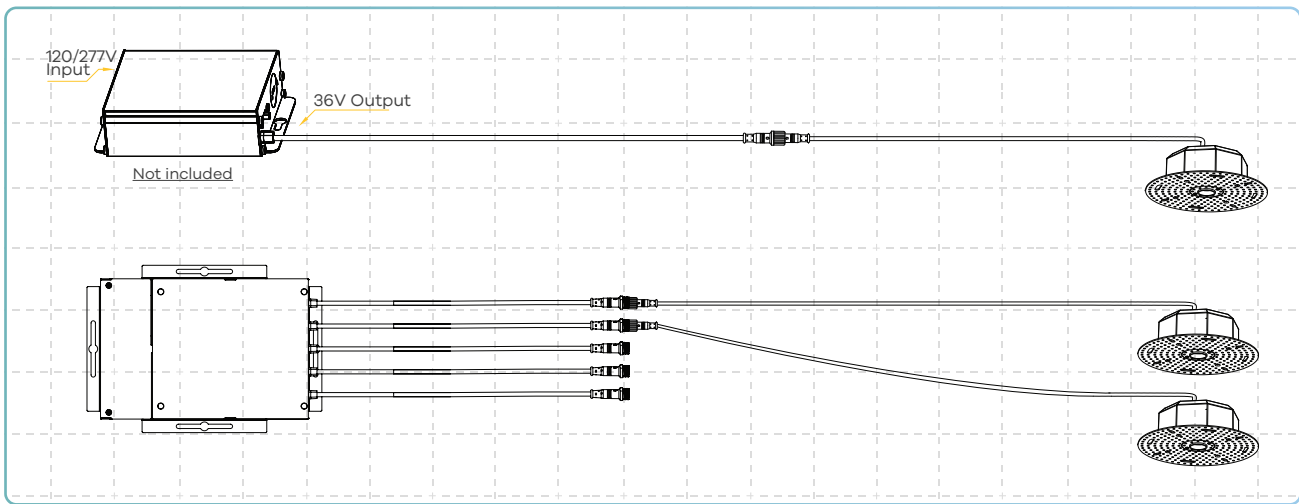

Dimmer List

Brand	Load	Model
LUTRON	150W	LECL-153P
		CTCL-150H
		LGCL-153PLH
		CTCL-153P
		SCL-153P
		PD-6WCL
		PD-5NE
		DVCL-153P
		TGCL-153P
		AYCL-153P
		MSCL-OP153M
		STCL-153M
		DVRF-6L
	250W	PD-10NXD
		DVCL253
		DVRP-253
		MRF2S-6CL
	300W	DVELV-300P
		SELVB-300P
	600W	MACL-153M
		MRF2-600M
		DVLV603
		MA-600

Brand	Load	Model
LEVITON	150W	IPL06
		6672
		6674
		RDL06-10Z
		RNL06-10Z
		DSL06-1LZ
	300W	D26HD
		LSCL450W
PASS & SEYMOUR	250W	WSCL450W
EATON	300W	DDE06-BLZ
		AAL06

0-10V Dimming	
Brand	Model
LUTRON	DVSTV
	DVSCTV
LEVITON	IP710-DLZ
	DS710-10Z
LEGRAND	RH4FBL3P
COOPER	SF10P