



MOON TRIMLESS

DROP LENS - SQUARE



G-20463

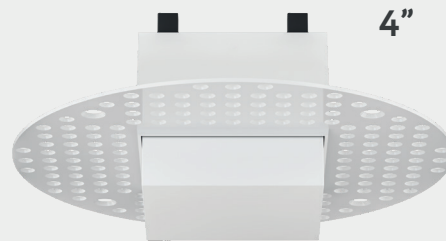


G-20464


ITEM	G-20463	G-20464
DESCRIPTION	DL3/15W/SQ/2WS/5CCT/TL	DL4/20W/SQ/2WS/5CCT/TL
VOLTAGE	120/277V	120/277V
WATTS	10W/15W	15W/20W
LUMENS	700/1000	1200/1700
BEAM ANGLE	130	130
DIMMABLE	Triac or 0-10V	Triac or 0-10V
COLOR TEMP	27, 30, 35, 41, 50k	27, 30, 35, 41, 50k
OD	5.12"	6.89"
HEIGHT	2.05"	1.79"
CUT OUT	Sq 2.45" - Rd 3.24"	Sq 3.23" - Rd 4.40"
LENS WIDTH	2.08"	2.76"
LENS DROP	0.89"	0.89"
mA	230/355mA	353/515mA
CRI	90	90
PLENUM RATED	FT6	FT6
IC RATED	Only at 10W	Only at 15W
NC PLATE	G-19975 (3)	G-19975 (5)
PACKED	18	18

Dimensions

G-20463

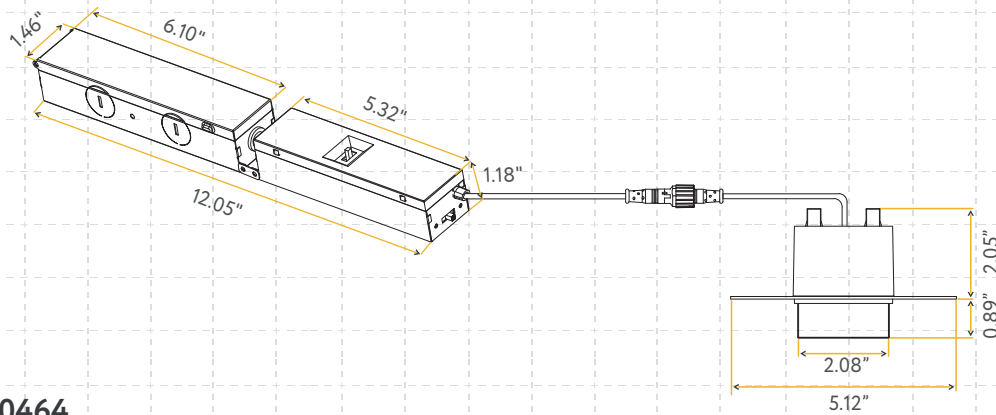

G-20464

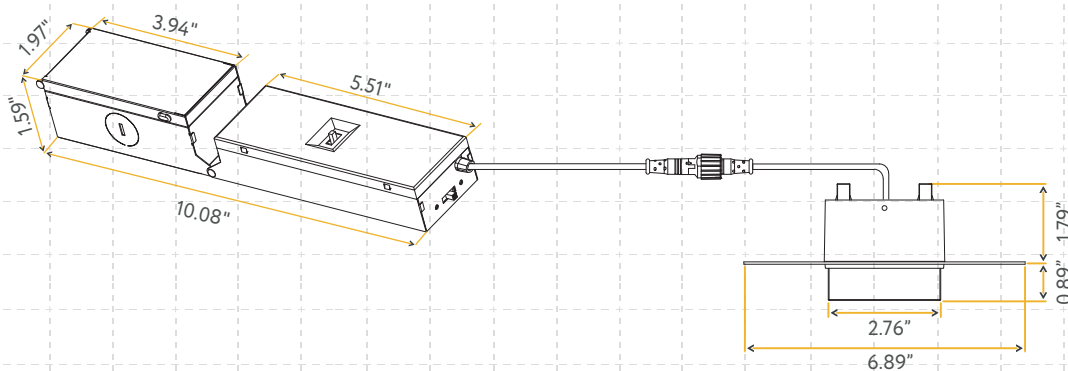

Accessories



Emergency LED Driver

15W G-48410 60W G-95521
30W G-48411 25W G-95525



Extension Cords

G-20247 5ft G-20248 10ft
G-19822 20ft G-19823 30ft



Multi Driver Converter

G-20463 use G-95824 10W / G-95825 15W
G-20464 use G-95825 15W / G-95826 20W



Construction Plate

G-19975



Lifetime:
50,000 hours



Warranty:
3 years



Dimmable:
Down to 5%

