

STAR

4" RECTANGULAR FLUSHED SLIM


G-11141




G-11142



G-11143

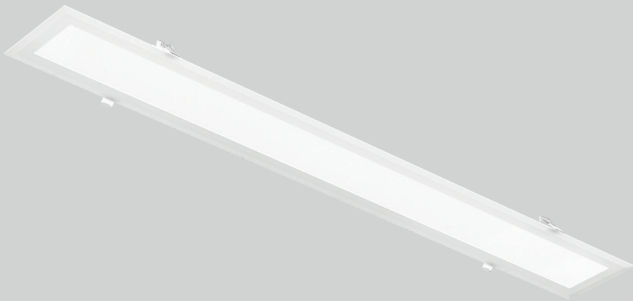

G-11144

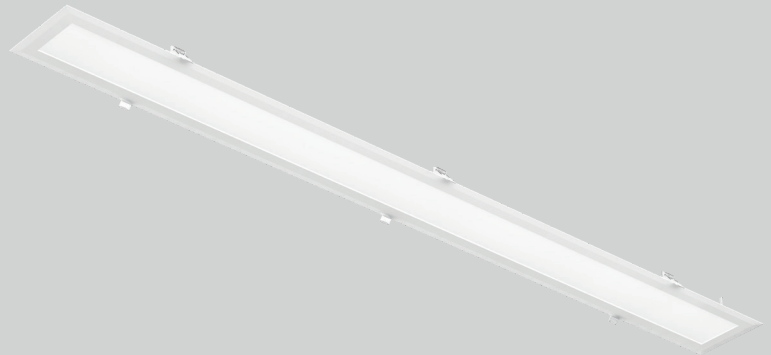


Lifetime:
50,000 hours



Warranty:
3 years



Dimmable:
Down to 5%



ITEM	G-11141	G-11142	G-11143	G-11144
SIZE	4"X1'	4"X2'	4"X3'	4"X4'
DESCRIPTION	S/RCTNGL/4X12/20W/SQ/LED/5CCT	S/RCTNGL/4X24/40W/SQ/LED/5CCT	S/RCTNGL/4X36/56W/SQ/LED/5CCT	S/RCTNGL/4X48/80W/SQ/LED/5CCT
VOLTAGE	120/277V	120/277V	120/277V	120/277V
WATTS	20W	40W	56W	80W
LUMENS	1600	3400	4800	6000
BEAM ANGLE	120	120	120	120
DIMMABLE	Triac or 0-10v	Triac or 0-10v	Triac or 0-10v	Triac or 0-10v
COLOR TEMP	27, 30, 35, 41, 50k	27, 30, 35, 41, 50k	27, 30, 35, 41, 50k	27, 30, 35, 41, 50k
OD	4.92" X 12.91"	4.92" X 24.92"	4.92" X 36.93"	4.92" X 48.03"
HIGHT	1.18"	1.18"	1.18"	1.18"
CUT OUT	4.13" X 12.13"	4.13" X 24.09"	4.13" X 36.14"	4.13" X 47.17"
mA	495mA	1025mA	1380mA	1930mA
CRI	90	90	90	90
PLENUM RATED	FT6	FT6	FT6	FT6
IC RATED	Yes	Yes	Yes	Yes
PACKED	12	6	4	4

Accessories



EXTENSION CORDS

G-20247 5ft

G-20248 10ft

G-19822 20ft

G-19823 30ft



EMERGENCY LED DRIVER

G-48410 15W


G-95521 60W

G-48411 30W


G-95525 25W

Dimensions


G-11141

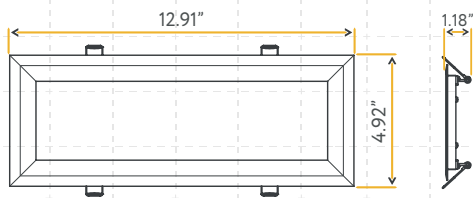

G-11142

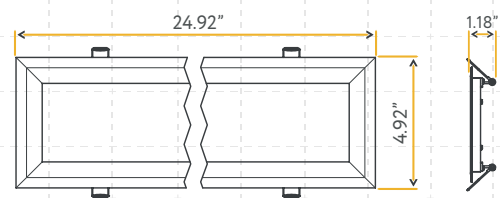

G-11143

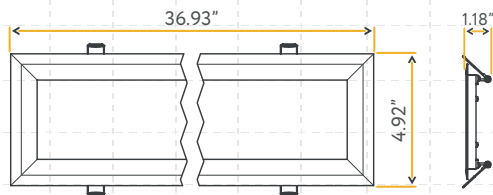

G-11144

