

STAR

6" RECTANGULAR FLUSHED SLIM

G-11161



G-11162



G-11163



G-11164




Lifetime:
50,000 hours



Warranty:
3 years



Dimmable:
Down to 5%



ITEM	G-11161	G-11162	G-11163	G-11164
SIZE	6"X1'	6"X2'	6"X3'	6"X4'
DESCRIPTION	S/RCTNGL/6X12/24W/SQ/LED/5CCT	S/RCTNGL/6X24/48W/SQ/LED/5CCT	S/RCTNGL/6X36/72W/SQ/LED/5CCT	S/RCTNGL/6X48/96W/SQ/LED/5CCT
VOLTAGE	120/277V	120/277V	120/277V	120/277V
WATTS	24W	48W	72W	96W
LUMENS	1900	4000	5600	7800
BEAM ANGLE	120	120	120	120
DIMMABLE	Triac or 0-10v	Triac or 0-10v	Triac or 0-10v	Triac or 0-10v
COLOR TEMP	27, 30, 35, 41, 50k	27, 30, 35, 41, 50k	27, 30, 35, 41, 50k	27, 30, 35, 41, 50k
OD	6.89" X 12.91"	6.89" X 24.92"	6.89" X 36.93"	6.89" X 48.03"
HIGHT	1.18"	1.18"	1.18"	1.18"
CUT OUT	6.10" X 12.13"	6.10" X 24.09"	6.10" X 36.14"	6.10" X 47.17"
mA	530mA	1220mA	1700mA	2400mA
CRI	90	90	90	90
PLENUM RATED	FT6	FT6	FT6	FT6
IC RATED	Yes	Yes	Yes	Yes
PACKED	12	6	4	4

Accessories



EXTENSION CORDS

G-20247 5ft

G-20248 10ft

G-19822 20ft

G-19823 30ft



EMERGENCY LED DRIVER

G-48410 15W


G-95521 60W

G-48411 30W


G-95525 25W

Dimensions


G-11161

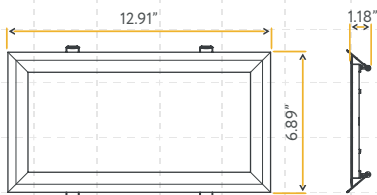

G-11162

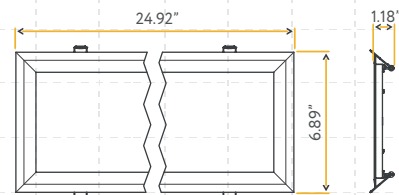

G-11163

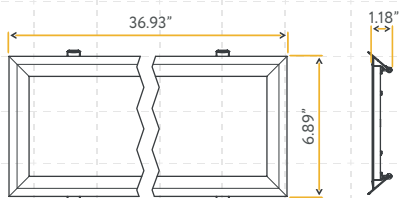

G-11164

