

Tube Series

T8 2 FT LED UNIVERSAL Frosted




ITEM	G-20048		
DESCRIPTION	F9T8/F/30,35,41,50,65k		
COLOR TEMP	30,35,41,50,65k	EQUIV. WATTAGE	24W
LENGTH	24"	INPUT VOLTS	120/277V
OUTPUT LUMEN	1000	DIMMABLE	NO
WATTAGE	9W	PACK	30



- WARM WHITE 3000K
- NEUTRAL WHITE 3500K
- COOL WHITE 4100K
- SUPER WHITE 5000K
- DAYLIGHT 6500K



ITEM	G-83406	G-19803	G-83407	G-83408	G-83409
DESCRIPTION	F9T8/830/F/LED	F9T8/835/F/LED	F9T8/841/F/LED	F9T8/850/F/LED	F9T8/865/F/LED
COLOR TEMP	3000k Warm White	3500k Neutral White	4100k Cool White	5000k Super White	6500k Daylight
LENGTH	24"	24"	24"	24"	24"
OUTPUT LUMEN	1000	1000	1000	1000	1000
WATTAGE	9W	9W	9W	9W	9W
EQUIV. WATTAGE	24W	24W	24W	24W	24W
INPUT VOLTS	120/277V	120/277V	120/277V	120/277V	120/277V
DIMMABLE	NO	NO	NO	NO	NO
PACK	30	30	30	30	30

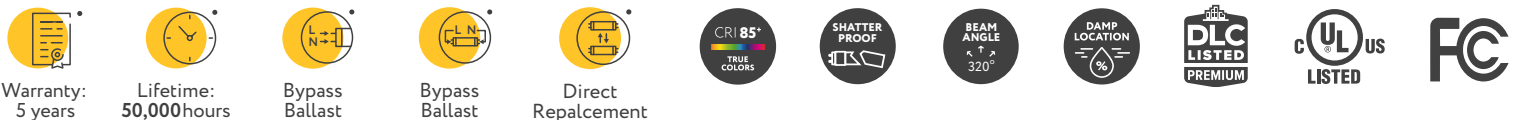

Tube Series

T8 2 FT LED UNIVERSAL Frosted



ITEM	G-83457	G-83458	G-83459
DESCRIPTION	F9T8/841/C/LED	F9T8/850/C/LED	F9T8/865/C/LED
COLOR TEMP	4100k Cool White	5000k Super White	6500k Daylight
LENGTH	24"	24"	24"
OUTPUT LUMEN	1000	1000	1000
WATTAGE	9W	9W	9W
EQUIV. WATTAGE	24W	24W	24W
INPUT VOLTS	120/277V	120/277V	120/277V
DIMMABLE	NO	NO	NO
PACK	30	30	30

Accessories


Emergency LED Driver

15W G-48410

60W G-95521

30W G-48411

25W G-95525

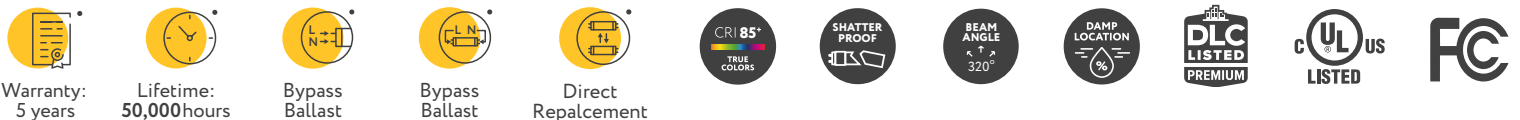


P. 2


Wiring Diagram



Bypass
Ballast




Bypass
Ballast



OR



Bypass
Ballast



Direct
Replacement

