

Tube Series

T8 3 FT LED UNIVERSAL Frosted




ITEM	G-20050		
DESCRIPTION	F12/T8/F/30,35,41,50,65k		
COLOR TEMP	30,35,41,50,65k	EQUIV. WATTAGE	30W
LENGTH	36"	INPUT VOLTS	120/277V
OUTPUT LUMEN	1500	DIMMABLE	NO
WATTAGE	12W	PACK	30



● WARM WHITE 3000K
● NEUTRAL WHITE 3500K
● COOL WHITE 4100K

● SUPER WHITE 5000K
● DAYLIGHT 6500K



ITEM	G-83487	G-83488	G-83489	G-83490	G-83491
DESCRIPTION	F12/T8/830/F/LED/Uni	F12/T8/835/F/LED/Uni	F12/T8/841/F/LED/Uni	F12/T8/850/F/LED/Uni	F12/T8/865/F/LED/Uni
COLOR TEMP	3000k Warm White	3500k Neutral White	4100k Cool White	5000k Super White	6500k Daylight
LENGTH	36"	36"	36"	36"	36"
OUTPUT LUMEN	1400	1400	1400	1400	1400
WATTAGE	12W	12W	12W	12W	12W
EQUIV. WATTAGE	30W	30W	30W	30W	30W
INPUT VOLTS	120/277V	120/277V	120/277V	120/277V	120/277V
DIMMABLE	NO	NO	NO	NO	NO
PACK	30	30	30	30	30



Warranty:
5 years



Lifetime:
50,000 hours



Bypass
Ballast



Bypass
Ballast




Direct
Replacement




Wiring Diagram



Bypass Ballast



Bypass Ballast

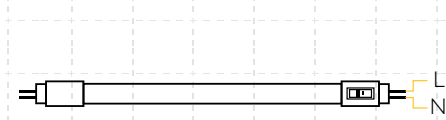


OR



Bypass Ballast



Direct Replacement

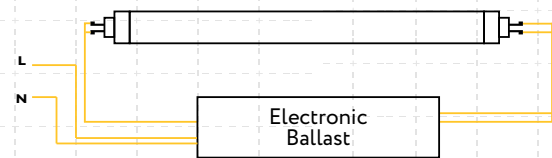

Accessories

Emergency LED Driver

15W G-48410

60W G-95521

30W G-48411

25W G-95525

