

Venus 3.5"

Square Trimless Luminaire



Product Information

Color temp	27, 30, 35, 41, 50k
Output lumens	850
Beam angle	40°
Input volts	120V
Wattage	12W
CRI	90+
mA	270mA
Output volts	36V
IC rated	YES
Dimmable	Triac
Cut out	Sq 3.40" - Rd 4.65"
OD	7.87"
Height	3.55"
Packed	18



Product Information

	G-20233	G-20234
Description	R3.5/12W/SQ/LED/TL/5CCT	R3.5/12W/SQ/LED/TL/5CCT B
Trim finish	White	Black



Accessories



Emergency LED Driver

15W G-48410
25W G-95525
30W G-48411
60W G-95521



Extension Cords

6ft G-20210
10ft G-20211




New Construction Plate

G-98800 7 Punch Out



New Construction Plate


G-98810 7 Punch Out



New Construction Plate

G-19981 3 Punch Out

Dimensions

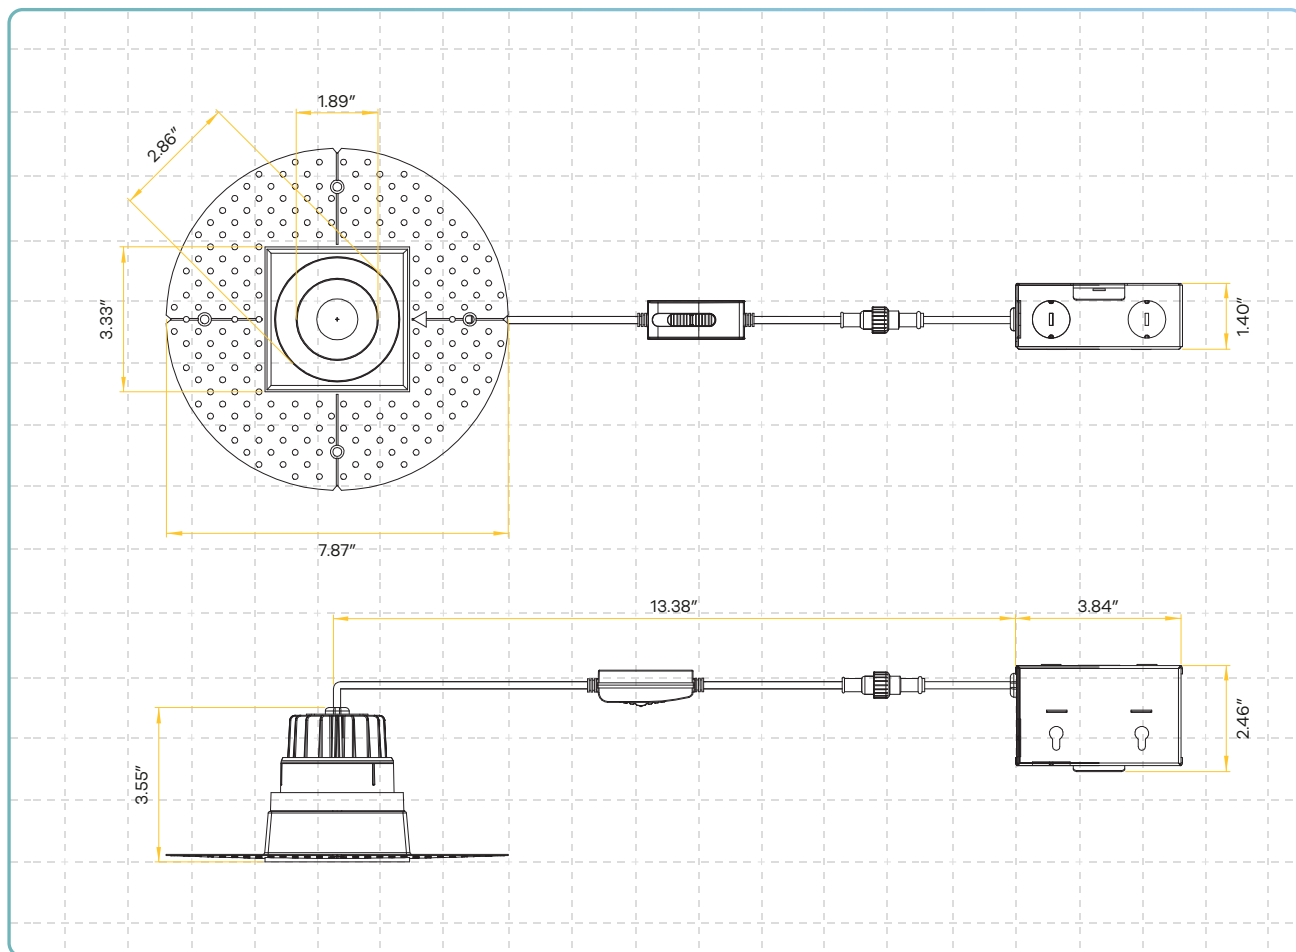

Dimmer List

Brand	Series	Model	Load	Dimmable	Brand	Series	Model	Load	Dimmable
LUTRON	ARIADNI	AYCL-153P	150W	OK	LUTRON	TOGGLER	TG-600P	600W	OK
	DIVA	DV-600PR	600W	OK			TGCL-153P	150W	OK
		DVCL-153P	150W	OK		CASETA	WIRELESS DIMMER	150W	OK
	MAESTRO	MACL-153MH	600W	OK	LEVITON	SURESLIDE	6633	600W	OK
	MAESTRO WIRELESS	MRF2-6CL	150W	OK		SURESLIDE DECORA	6674	600W	20-100%
	ROTARY	D-600P	600W	OK		TRIMATRON	6602	600W	20-100%
	ELECTRONIC	NTELV-300P	600W	OK		ILLVMATECH	IPL06	600W	OK
	SKYLARK	S-600P	600W	OK	LEGRAND	ADORNE	ADTP703TU	700W	20-100%
	SKYLARK CONTOUR	CT-600P	600W	OK		HARMONY	9540	700W	OK
		CLCL-153P	153W	OK	COOPER	ASPIRE	9540	1000W	OK
						DEVINE	DAL06P	300W	OK