



ASTER 4" INTERCHANGEABLE MODULE



G-10010



G-10020



G-10025



ITEM	G-10010		
DESCRIPTION	M4/12W/LED/SCCT	mA	270mA
COLOR TEMP	27, 30, 35, 41, 50k	OUTPUT VOLTS	33-38V
OUTPUT LUMEN	1100	IC RATED	Yes
BEAM ANGLE	40° Clear (Default)	PLENUM RATED	FT6
INPUT VOLTS	120-277	DIMMABLE	Triac or 0-10V
WATTAGE	12W	DIM TO WARM	See Table
CRI	90>	PACKED	18

ITEM	G-10020		
DESCRIPTION	M4/15W/WS2/LED/SCCT	mA	350/210mA
COLOR TEMP	27, 30, 35, 41, 50k	OUTPUT VOLTS	33-38V
OUTPUT LUMEN	1550/950	IC RATED	Yes
BEAM ANGLE	40° Clear (Default)	PLENUM RATED	FT6
INPUT VOLTS	120-277	DIMMABLE	Triac or 0-10V
WATTAGE	15/9W	PACKED	12
CRI	90>		

ITEM	G-10025		
DESCRIPTION	M4/32W/WS2/LED/SCCT	mA	765/495mA
COLOR TEMP	27, 30, 35, 41, 50k	OUTPUT VOLTS	33-38V
OUTPUT LUMEN	3000/2000	IC RATED	Only at 20W
BEAM ANGLE	60° Clear (Default)	PLENUM RATED	FT6
INPUT VOLTS	120-277	DIMMABLE	Triac or 0-10V
WATTAGE	32/20W	PACKED	6
CRI	90>		

Content

Aster 4" Interchangeable Module	1
Lens Options	2
Accessories	2
Trims	3
Shallow & Ultra Shallow Trims	4
Narrow Trims	5
Trimless	5
Wall Wash	6
Millwork Trimless	7
Dimmer List	8
Driver Box	8

G-10010 5CCT & Multi Dim to Warm Colors

SET TO	AT CCT SETTING	AT DIM TO WARM SETTING
1. 2700K	2700 Kelvin	2500K - 1800K
2. 3000K	3000 Kelvin	2700K - 1800K
3. 3500K	3500 Kelvin	3000K - 1800K
4. 4000K	4000 Kelvin	3500K - 1800K
5. 5000K	5000 Kelvin	4000K - 1800K

Lens Options



Clear Lens

G-11022



L4/24-DEGREE

G-11023



L4/40-DEGREE

G-11024



L4/60-DEGREE

Frosted Lens

G-11020



L4/FROSTED/80°

Lens Covers

G-21427



4/SOLITE LENS

G-21428



4/PRISMATIC LENS

G-21429



4/BEAMSPILT LENS

Reflector Lens

Compatible with G-10010 & G-10020

G-11025



L4/REFLECTOR/30°

G-11026



L4/REFLECTOR/60°

Reflector Lens

Compatible with G-10025

G-11027



L4/REFLECTOR/30°

G-11028



L4/REFLECTOR/60°

Diffuser

G-21440



4/HEX/HC/DIFFUSER

STYLE

PACK

LENS OPTIONS

100

Accessories



Emergency LED Driver

15W G-48410

60W G-95521

30W G-48411

25W G-95525



Multi Driver Converter

G-10010 use G-95824 12W

G-10020 use G-95824 9W / G-95825 14W

G-10025 use G-95826 20W



Extension Cords

G-20247 5ft

G-20248 10ft

G-19822 20ft




G-19823 30ft



New Construction Plate





G-19975

Trims Options





White	Black	Two-tone	Bronze	Brushed Nickel	Brushed Brass	White Baffle
G-10120	G-10121	G-10122	G-10123	G-10124	G-10125	G-22240
						
T4/R/W/G2	T4/R/BL/G2	T4/R/BW/G2	T4/R/BZ/G2	T4/R/BN/G2	T4/R/BB/G2	T4/R/W/BF-NG
G-10220	G-10221	G-10222	G-10223	G-10224	G-10225	
						
T4/SQ/W/G2	T4/SQ/B/G2	T4/SQ/BW/G2	T4/SQ/BZ/G2	T4/SQ/BN/G2	T4/SQ/BB/G2	

STYLE	CUT OUT	OD	HEIGHT	PLATE	PACK
TRIMMED	4.25"	4.92"	W/G-10010 2.45" W/G-10020 3.29" / W/G-10025 5.15"	G-19975 4 Punch Out	36


Trimmed Round



Trimmed Square




Shallow Trims Options

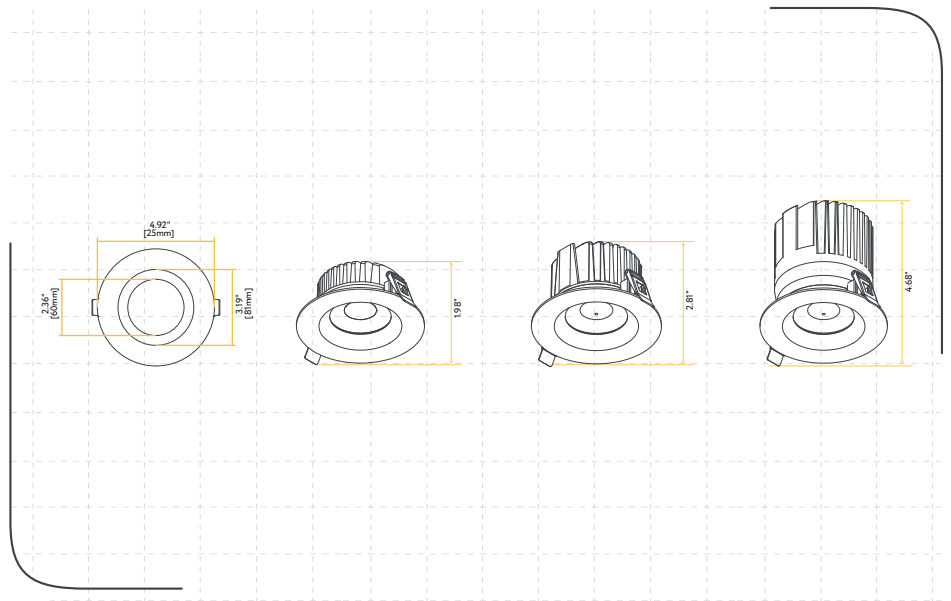



STYLE	CUT OUT	OD	HEIGHT	PLATE	PACK
SHALLOW	4.25"	4.92"	W/G-10010 1.98" / W/G-10020 2.81" / W/G-10025 4.68"	G-19975 4 Punch Out	36

Ultra Shallow Trims Options

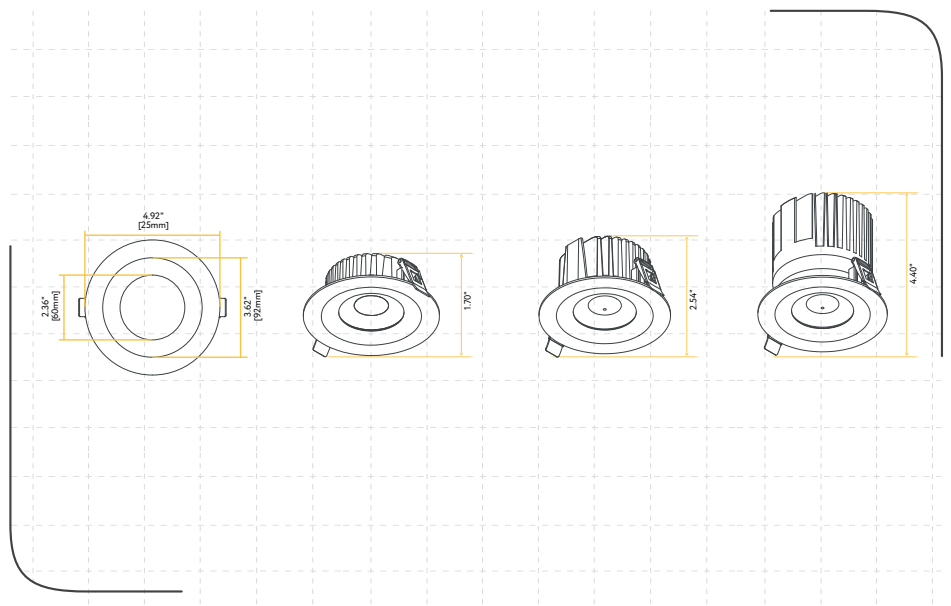

STYLE	CUT OUT	OD	HEIGHT	PLATE	PACK
ULTRA SHALLOW	4.25"	4.92"	W/G-10010 1.70" / W/G-10020 2.54" / W/G-10025 4.40"	G-19975 4 Punch Out	36

Narrow Trims

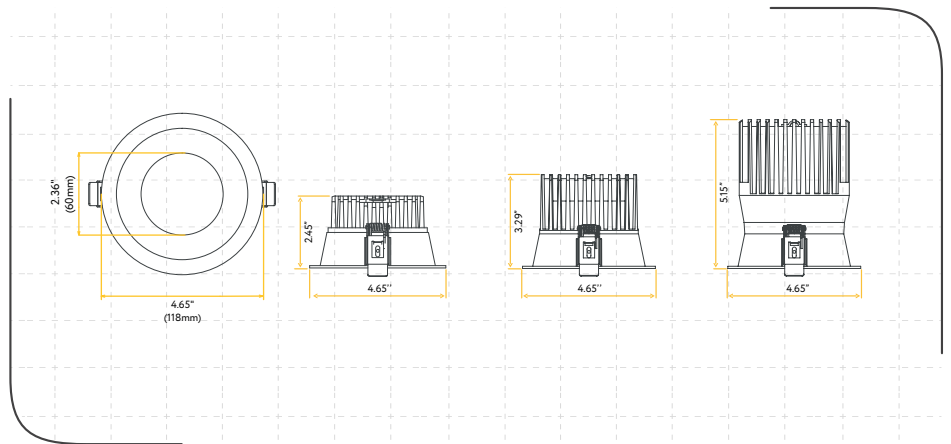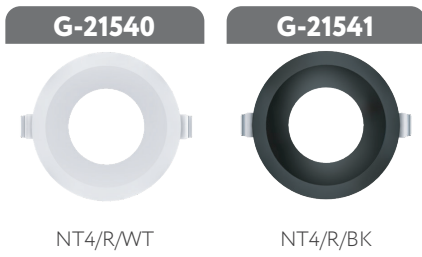


STYLE	CUT OUT	OD	HEIGHT	PLATE	PACK
NARROW	4.25"	4.65"	W/G-10010 2.45" W/G-10020 3.29" / W/G-10025 5.15"	G-19975 (4)	36

Trimless Options




STYLE	CUT OUT	OD	HEIGHT	PLATE	PACK
TRIMLESS ROUND	4.25"	6.89"	W/G-10010 2.35" W/G-10020 3.19" / W/G-10025 5.05"	G-19975 4 Punch Out	36
TRIMLESS SQUARE	Sq 4.80" / Rd 6.75"	9.45"	W/G-10010 3.2" W/G-10020 4.04" / W/G-10025 5.90"	G-19982 7 Punch Out	36

Trimless Round

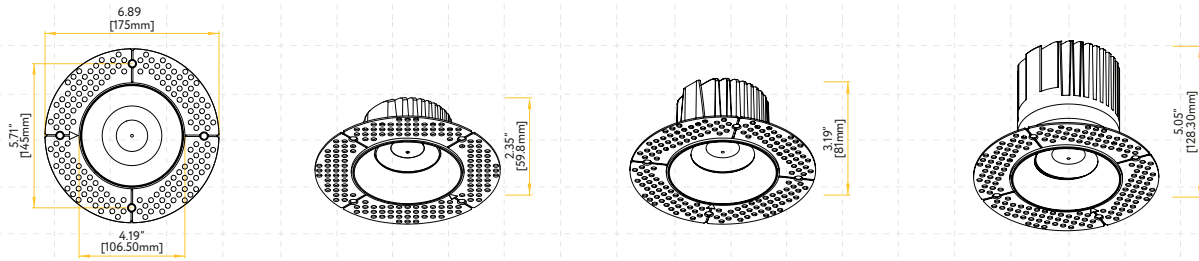

Trimless Square

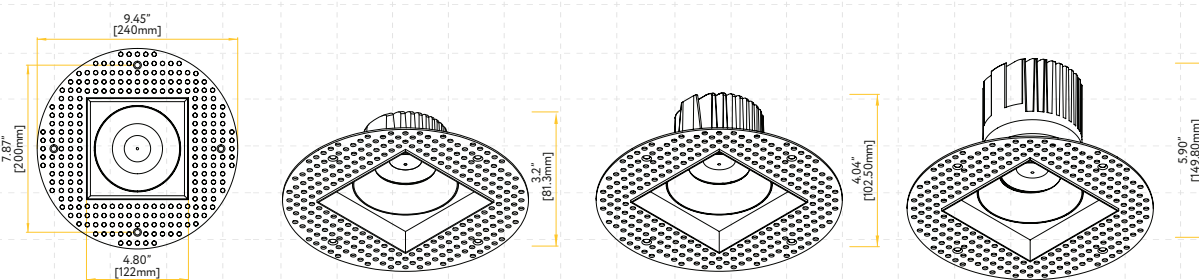

Wall Wash

White

G-10520



T4/R/WW/W/G2

Black

G-10521



T4/R/WW/BL/G2

G-10620




T4/SQ/WW/WG2

G-10621




T4/SQ/WW/BL/G2

Wall Wash Round

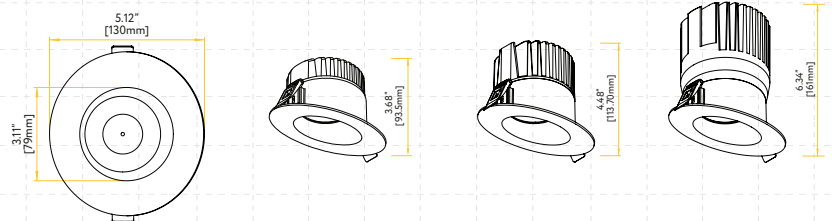


Wall Wash Square

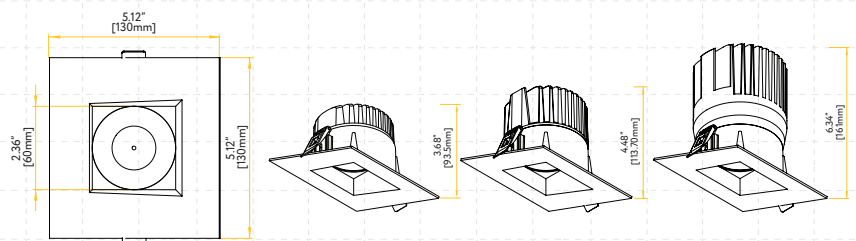


STYLE	CUT OUT	OD	HEIGHT	PLATE	PACK
TRIM WALL WASH	4.25"	5.12"	W/G-10010 3.68" W/G-10020 4.48" / W/G-10025 6.34"	G-19975 3 Punch Out	36

Millwork Trimless

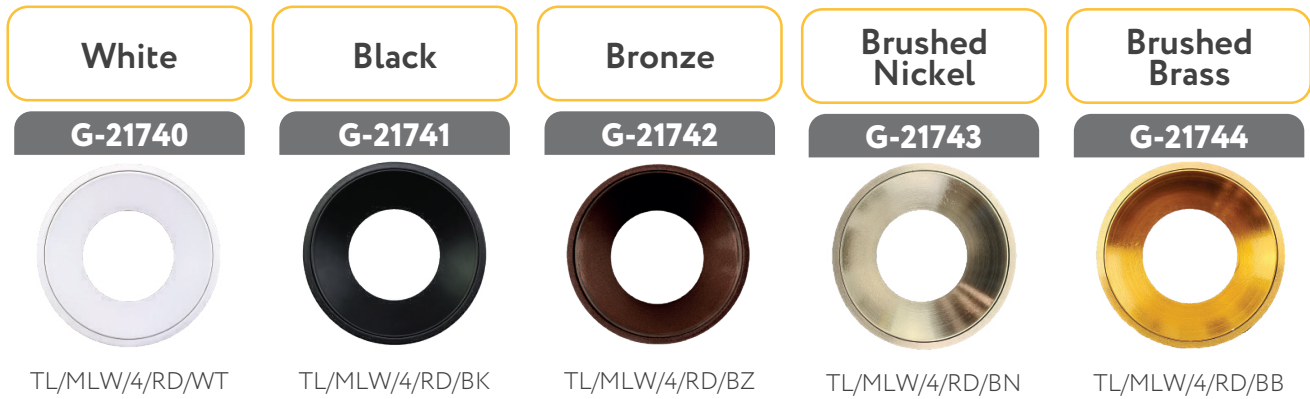

STYLE	CUT OUT	OD	HEIGHT
MILLWORK TRIMLESS	4.23"	4.39"	W/G-10010 2.35" W/G-10020 3.19" / W/G-10025 5.05"


Millwork Trimless

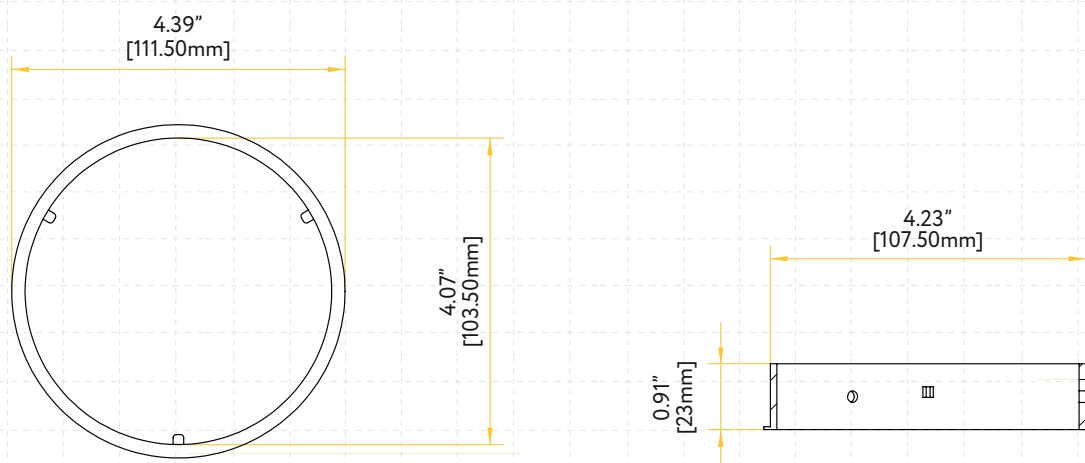


Dimmer List

BRAND	SERIES	MODEL	LOAD	BRAND	SERIES	MODEL	LOAD
LUTRON	SKYLARK CONTOUR	LECL-153P	150W	LUTRON	TOGGLER	TGCL-153P	150W
		CTCL-150H	150W		ARIADNI	AYCL-153P	150W
		LGCL-153PLH	150W		MAESTRO	MACL-153M	600W
		CTCL-153P	150W	LEVITON	ILLUMATECH	IPL06	150W
		SCL-153P	150W		SURESLIDE	6672	150W
		S-600P	600W			6674	150W
	CASETA	PD-6WCL	150W	EATON	SMART DIMMER	AAL06	300W
		PD-5NE	150W	PASS & SEYMOUR	HARMONY	DCL453PTCCCV6	150W
		PD-10NXD	250W	GE	ROCKER	10464	150W
	DIVA	DVCL-153P	150W		TOGGLE	18027	150W


Driver Box for G-10020

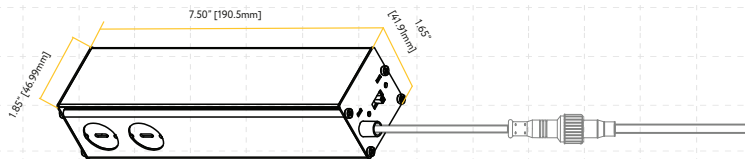

Driver Box for G-10010

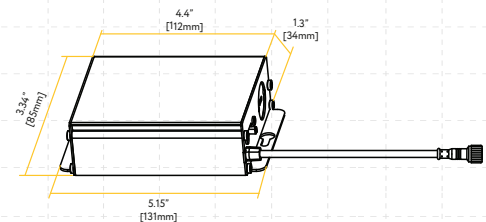


Driver box for G-10025

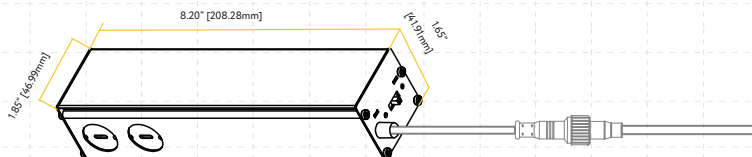


4" MULTI HEAD INTERCHANGEABLE TRIMLESS KITS


ROUND OPTIONS

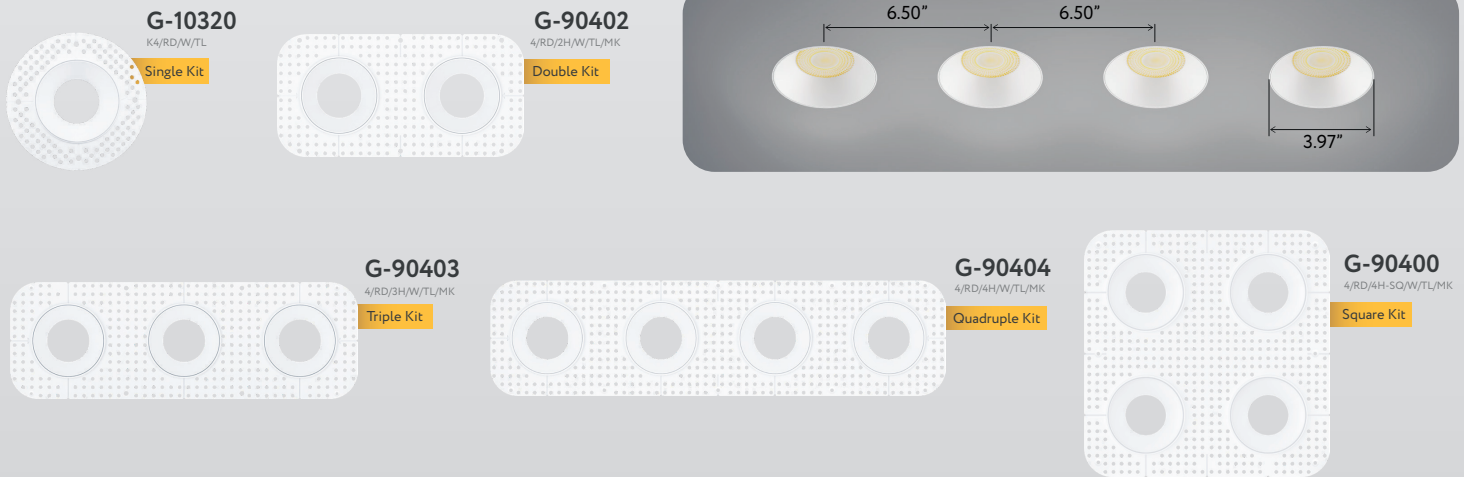

Dimensions

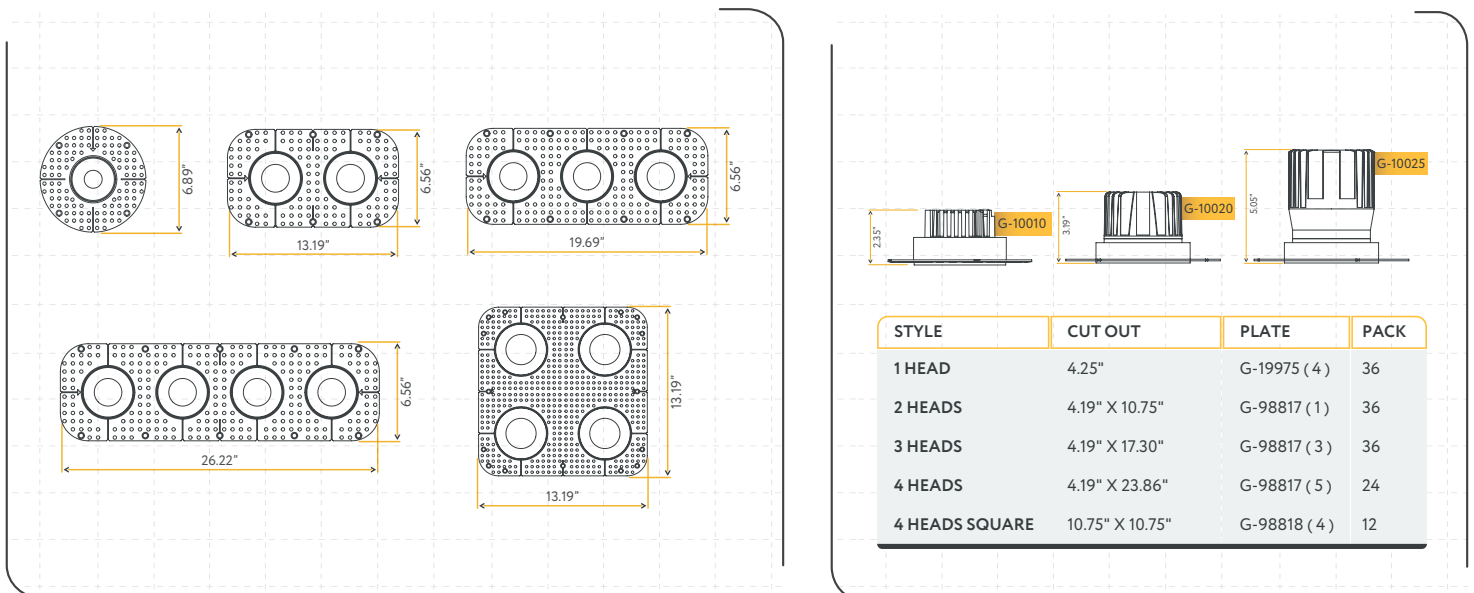

SQUARE OPTIONS

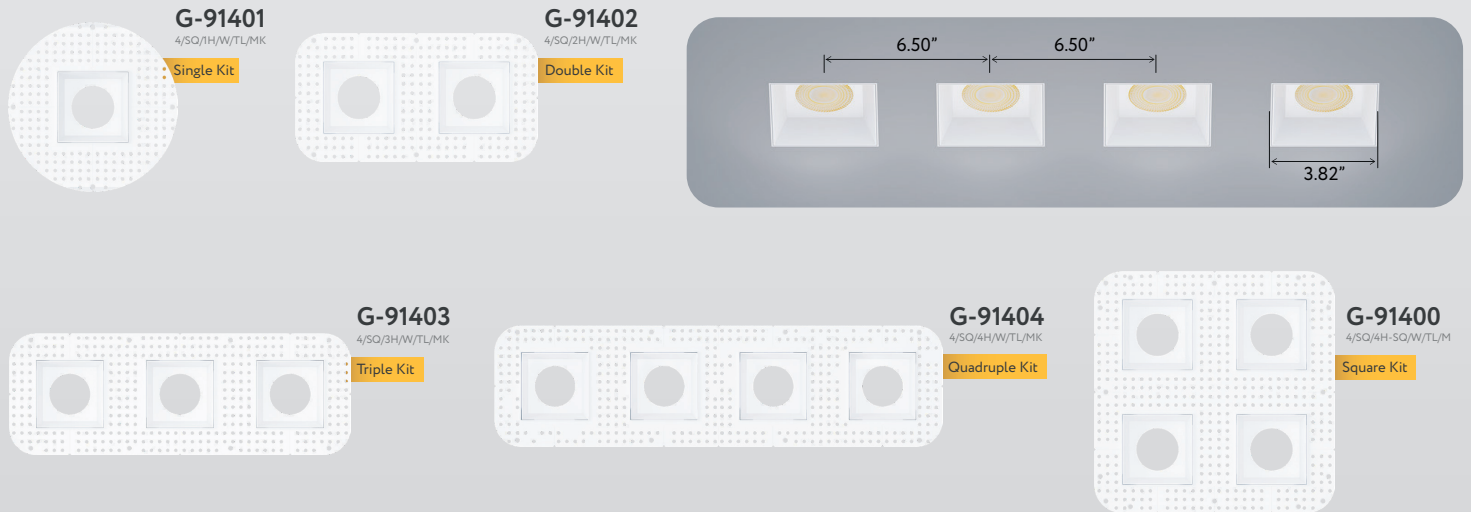

Dimensions

