

Fire Rated 4" Square Flushed Slim

Product Information

Description	S4/12W/SQ/LED/5CCT FR
Color temp	27, 30, 35, 41, 50k
Output lumens	850
Beam angle	100°
Input volts	120/277V
Wattage	12W
CRI	90+
mA	270mA
Output volts	33-38V
Dimmable	Triac Or 0-10V Dimming
Cut out	3.95"
OD	4.92"
Height	1.67"
Wire	FT6 Plenum rated
Certified	UL 263 & ASTM E119
Packed	18



Additional Sizes

- 3 Inch [↗](#)
- 5 Inch [↗](#)
- 6 Inch [↗](#)

Color Cover Options

- Black**
G-48388
- Brushed Nickel**
G-48389
- Bronze**
G-48390
- Brushed Brass**
G-48398

- CRI 90+ True Colors
- Wet Location
- Air Tight
- Dimmable
- IC Rated
- Fire Rated
- JA8 TITLE 24
- ETL LISTED
- FC

Accessories



Emergency LED Driver

15W G-48410
25W G-95525
30W G-48411
60W G-95521




Multi Light Driver

12W G-95824



Extension Cords

5ft G-20247
10ft G-20248
20ft G-19822
30ft G-19823




New Construction Plate

G-19975 4 Punch Out



New Construction Plate


G-19979 4 Punch Out



New Construction Plate

G-19969 1 Punch Out

Dimensions

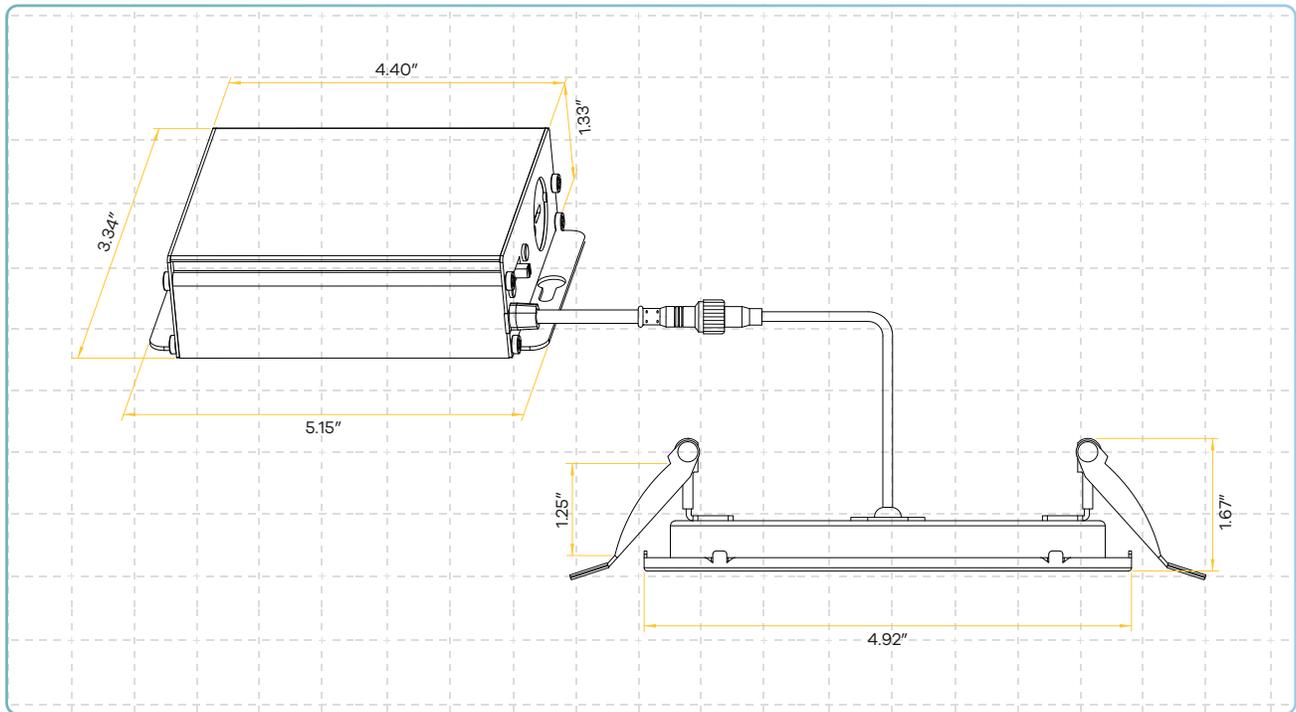

Dimmer List

Brand	Series	Model	Load	Brand	Series	Model	Load
LUTRON	SKYLARK CONTOUR	LECL-153P	150W	LUTRON	TOGLER	TGCL-153P	150W
		CTCL-150H	150W		ARIADNI	AYCL-153P	150W
		LGCL-153PLH	150W		MAESTRO	MACL-153M	600W
		CTCL-153P	150W	LEVITON	ILLUMATECH	IPL06	150W
		SCL-153P	150W		SURESLIDE	6672	150W
		S-600P	600W		SURESLIDE	6674	150W
	CASETA	PD-6WCL	150W	EATON	SMART DIMMER	AAL06	300W
		PD-5NE	150W	PASS & SEYMOUR	HARMONY	DCL453PTCCCV6	150W
		PD-10NXD	250W	GE	ROCKER	1064	150W
	DIVA	DVCL-153P	150W		TOGGLE	18027	150W