

Mini Electronic Driver

8W 24V


Product Information

Description	8W/24V/ECV/MNI DRIVER
Input volts	120VAC
Input wattage	8W
Output volts	24VDC
Minimum load	10%
Dimmable	Triac / ELV
Warranty	5 Years
Environment	Dry and damp location
Height	1.37"
Length	6.22"
Width	1.80"
Pack	40

G-97608



Dimensions

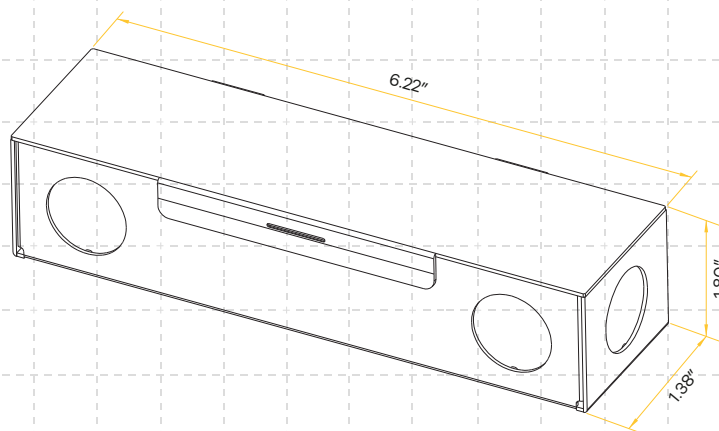

Voltage Drop Table

Wire Gauge	8W (0.33A) G-97608	15W (0.625A) G-97615	40W (1.66A) G-97600	60W (2.5A) G-97601	75W (3.125A) G-97602	96W (4A) G-97603 / G-97604
20 AWG	66FT	36FT	13FT	10FT	6FT	6FT
18 AWG	165FT	56FT	23FT	13FT	13FT	10FT
16 AWG	261FT	92FT	36FT	23FT	16FT	13FT
14 AWG	415FT	142FT	53FT	36FT	26FT	23FT
12 AWG	6633FT	228FT	86FT	56FT	43FT	36FT
10 AWG	1056FT	363FT	135FT	86FT	69FT	56FT

Driver Dimmer List

Brand	Load	Series	Model
LUTRON	150W	ARIADNI	AYCL-153P
		Diva	DVCL-153P
		Maestro Wireless	LGCL-153PLH
		Skylark Contour	MRF2-6CL
		Toggler	TCCL-153P
	600W	Diva	DV-600PR
		Skylark Contour	CT-600P
		Maestro	MACL-153MH
		Rotary	D-600P
		Electronic (ELV)	NTELV-300P
		Skylark	S-600P
		Toggler	TG-600P
		Sureslide	6633
		Sureslide Decora	6674
		Trimatron	6602
		ILLVMATECH	IPL06
		Adorne	ADTP703TU
		Harmony	H703PTW
LEVITON	600W		
LEGRAND	700W		
COOPER	1000W	Aspire	9540
	300W	Devine	DAL06P