Saturn 3” Flushed Gimbal

Selectable Color | CRI 90+ True Colors | Wet Location | Air Tight | Dimmable | IC Rated

G-19845



Product Information

Description	R3/8W/GR/LED/5CCT	mA	170mA
Color temp	27, 30, 35, 41, 50k	Dimmable	Triac or 0-10V
Trim finish	White	Cut out	2.75”
Output lumens	700	OD	3.36”
Beam angle	40°	Height	1.96”
Input volts	120-277V	Warranty	3 Years
Wattage	8W	Plate	G-98800 3 Punch Out
CRI	90>		

G-19846



Product Information

Description	R3/8W/GR/LED/B/5CCT	mA	170mA
Color temp	27, 30, 35, 41, 50k	Dimmable	Triac or 0-10V
Trim finish	Black	Cut out	2.75”
Output lumens	650	OD	3.36”
Beam angle	40°	Height	1.96”
Input volts	120-277V	Warranty	3 Years
Wattage	8W	Plate	G-98800 3 Punch Out
CRI	90>		

Made In China
Goodlite Products. Tinton Falls NJ 07753.

G-19847



Product Information

Description	R3/8W/GR/LED/BN/5CCT	mA	170mA
Color temp	27, 30, 35, 41, 50k	Dimmable	Triac
Trim finish	Brushed nickel	Cut out	2.75″
Output lumens	650	OD	3.36″
Beam angle	40°	Height	1.96″
Input volts	120V	Warranty	3 Years
Wattage	8W	Plate	G-98800 3 Punch Out
CRI	90>		


G-19848



Product Information

Description	R3/8W/GR/LED/BZ/5CCT	mA	170mA
Color temp	27, 30, 35, 41, 50k	Dimmable	Triac Or 0-10V
Trim finish	Bronze	Cut out	2.75″
Output lumens	650	OD	3.36″
Beam angle	40°	Height	1.96″
Input volts	120-277V	Warranty	3 Years
Wattage	8W	Plate	G-98800 3 Punch Out
CRI	90>		


G-19849



Product Information

Description	R3/8W/GR/LED/BB/5CCT	mA	170mA
Color temp	27, 30, 35, 41, 50k	Dimmable	Triac Or 0-10V
Trim finish	Brushed brass	Cut out	2.75″
Output lumens	700	OD	3.36″
Beam angle	40°	Height	1.96″
Input volts	120-277V	Warranty	3 Years
Wattage	8W	Plate	G-98800 3 Punch Out
CRI	90>		

G-19851



Product Information

Description	R3/8W/GS/LED/5CCT	CRI	90>
Color temp	27, 30, 35, 41, 50k	Dimmable	Triac
Trim finish	White	Cut out	2.75″
Output lumens	650	OD	3.36″
Beam angle	40°	Height	1.96″
Tilt angle	30°	Warranty	3 Years
Input volts	120-277V	Plate	G-98800 3 Punch Out
Wattage	8W	Packed	18

HO Round Flushed Gimbal

G-19855



Product Information

Description	R3/11W/GR/LED/5CCT	mA	250mA
Color temp	27, 30, 35, 41, 50k	Plenum rated	FT6
Trim finish	White	Dimmable	Triac or 0-10V
Output lumens	1050	Cut out	2.75″
Beam angle	60°	OD	3.36″
Tilt angle	30°	Height	4.35″
Input volts	120-277V	Warranty	3 Years
Wattage	11W	Plate	G-98800 3 Punch Out
CRI	90>	Packed	18

G-19856



Product Information

Description	R3/11W/GR/LED/B/5CCT	mA	250mA
Color temp	27, 30, 35, 41, 50k	Plenum rated	FT6
Trim finish	Black	Dimmable	Triac or 0-10V
Output lumens	1050	Cut out	2.75″
Beam angle	60°	OD	3.36″
Tilt angle	30°	Height	4.35″
Input volts	120-277V	Warranty	3 Years
Wattage	11W	Plate	G-98800 3 Punch Out
CRI	90>	Packed	18

Made In China
Goodlite Products. Tinton Falls NJ 07753.

Lens Options

Clear Lens



G-01420
FL/L3/24-DEGREE



G-01421
FL/L3/40-DEGREE



G-01422
FL/L3/60-DEGREE

Accessories



Emergency LED Driver
15W G-48410
25W G-95525
30W G-48411
60W G-95521



Multi Driver Converter
For G-19845 / G-19846 / G-19847 / G-19848 / G-19849
use 8W G-95823
For G-19855 / G-19856
use 10W G-95824




Extension Cords
5ft G-20247
10ft G-20248
20ft G-19822
30ft G-19823

Note: Emergency batteries must equal or exceed the fixture's maximum wattage. Keep in mind that these fixtures feature selectable wattage.


Dimensions

Regular

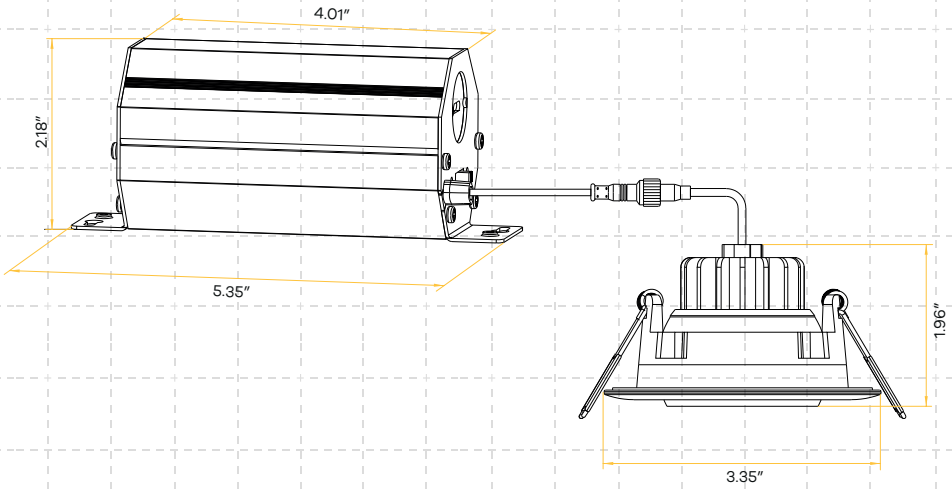

Dimensions

High Output

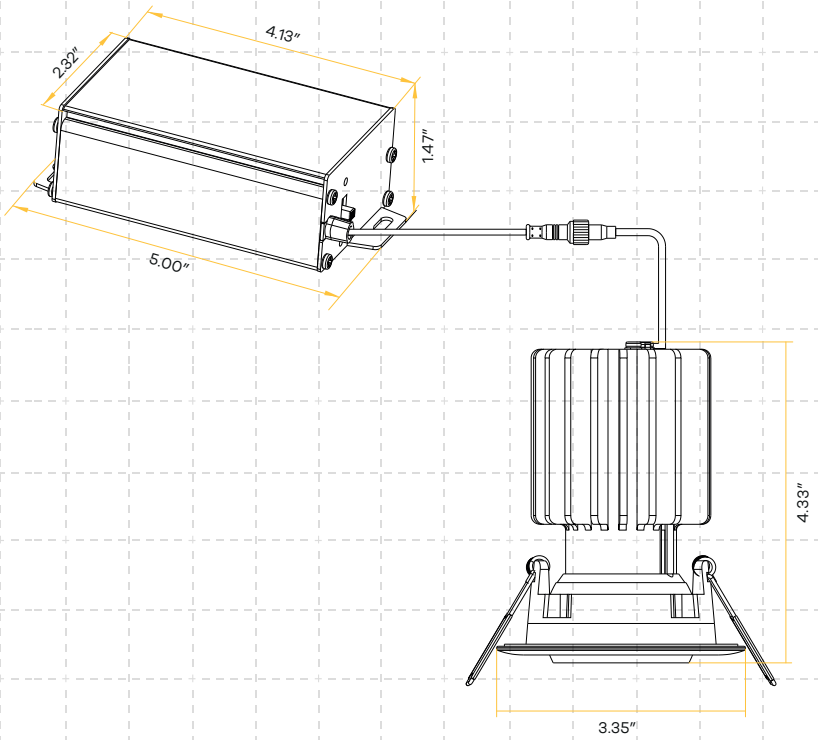

Made In China
Goodlite Products. Tinton Falls NJ 07753.